


“Sat Buddy 2”™

Satellite Signal Meter
User Instructions

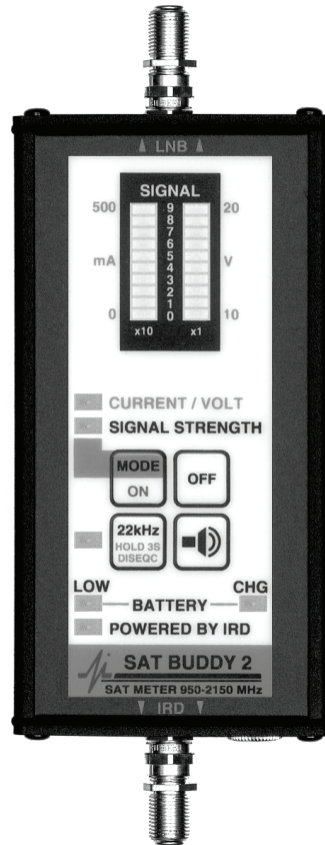

DEFINITIONS

- LNB:** Low Noise Block amplifier. The portion of the antenna dish that receives the high-frequency signal reflected from the dish and then down-converts it to the L-band (950-2150 MHz).
- IRD:** Integrated Receiver Decoder. Also referred to as the set-top box or satellite receiver. The IRD processes the digital data carried by the RF signal and provides the baseband picture signal to the television.
- RF:** Radio Frequency signals
- Cable:** 75 Ohm coaxial cable
- Dish:** Oval shaped antenna hardware mounted on the exterior of the customer's premises.

Order From:  **MULTICOM**®

Toll Free: 800-423-2594
www.multicominc.com
multicom@multicominc.com

