



Drop Cable

PRODUCT SPECIFICATIONS



FEATURES:


- Foam Dielectric
- Aluminum Braid
- PVC Jacket
- Boxed 1,000 Ft. Reels
- Copper Clad Center Conductor
- Impedance - 75 Ohm
- Velocity of Propagation - 85%

Type	Part Number	Braid Coverage	Color/Description
RG-59	M5960-BV	60%	Black
RG-59	M5960-BVV	60%	Black/CATV UL Listed
RG-6	M660-BV	60%	Black
RG-6	M660-BVW	60%	White
RG-6	M660-BVV	60%	Black/CATV UL Listed
RG-6	M660-BVWV	60%	White/CATV UL Listed
RG-6	M660-BVM	60%	Black/Messenger
RG-6	M690-BV	90%	Black
RG-6	M690-BVW	90%	White
RG-6	M690-BVV	90%	Black/CATV UL Listed
RG-6	M690-BVWV	90%	White/CATV UL Listed
RG-6	M690-BVM	90%	Black/Messenger
RG-11	M1160-BV	60%	Black
RG-11	M1160-BVV	60%	Black/CATV UL Listed
RG-11	M1160-BVM	60%	Black/Messenger
RG-11	M1190-BV	90%	Black
RG-11	M1190-BVV	90%	Black/CATV UL Listed
RG-11	M1190-BVM	90%	Black/Messenger

ATTENUATION AT 68°F (20°C)

Frequency MHz	RG-59		RG-6		RG-11	
	dB/100 Ft.	dB/100 M.	dB/100 Ft.	dB/100 M.	dB/100 Ft.	dB/100 M.
5 MHz	0.89	2.92	0.69	2.26	0.38	1.25
55 MHz	1.95	6.40	1.60	5.25	0.97	3.18
211 MHz	3.59	11.78	2.87	9.41	1.81	5.94
450 MHz	5.30	17.38	4.26	13.97	2.65	8.69
550 MHz	5.90	19.35	4.71	15.45	2.94	9.64
750 MHz	6.96	22.83	5.59	18.34	3.44	11.28
870 MHz	7.54	24.73	6.00	19.68	3.84	12.60
1000 MHz	8.09	26.54	6.54	21.45	4.23	13.87
1450 MHz	10.54	34.57	8.30	27.22	5.07	16.63
2250 MHz	13.70	44.94	10.60	34.77	6.5	21.32
3000 MHz	15.50	50.84	11.90	39.03	7.67	25.16
3500 MHz	16.74	54.91	12.85	42.15	8.28	27.16

Cable Illustrations

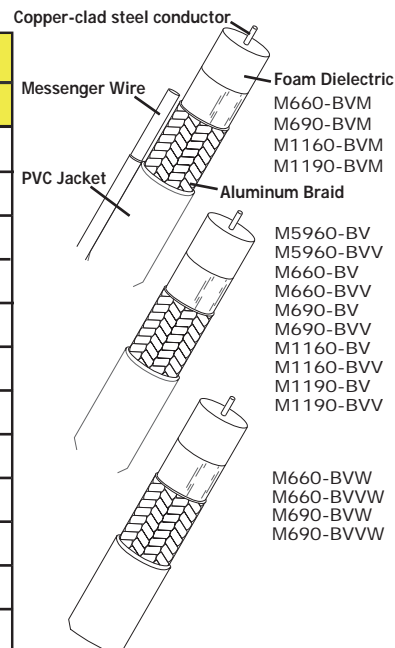

1076 Florida Central Pkwy.
Longwood, FL 32750

www.multicominc.com

Toll Free: 800-423-2594
Phone: 407-331-7779