



# 1 RU Rack Mount - Custom Loaded Patch and Splice Enclosure

## Product Specifications

### Key Features

- New Splice Tray design eases installation
- Custom loaded to your specific configuration
- 1.5M Pigtails included in loaded enclosures
- Splice tray and cable management spools included
- Accepts up to three LGX Adapter Panels
- Hinged front and rear Plexiglass doors
- Side patch and exit ports
- Fully removable sliding-out tray for easy access
- 16 gauge cold rolled steel construction
- Powder coat black finish
- Assorted strain relief and fiber accessories included
- Provides higher patch field density in fewer rack units saving valuable rack space





### Description

The Multicom 1 RU Patch and Splice Enclosure is designed to accept up to 3 LGX Adapter Panels with the ability to use a full array of connector types. This enclosure offers a flexible solution, enabling the incorporation of a multi-functional chassis that allows easy access during installation or re-work with no disturbance of the existing fiber cable - making this one of the most flexible enclosures on the market.

Characteristics	Specification
Suitable for module type	LGX Adapter Panels
Number of module positions	3 - Can be Simplex/Duplex
Material	16 gauge, cold-rolled steel
Material finish	Black, powder coated
Operating temperature	-40 to 140°F (-40 to 60°C)
Height	1.75" (44.4mm)
Width	17" (432mm)
Depth	14" (356mm)
Net weight	13lbs. (5.9kg)

### MUL-RM-8F-PS-SC/APC-S

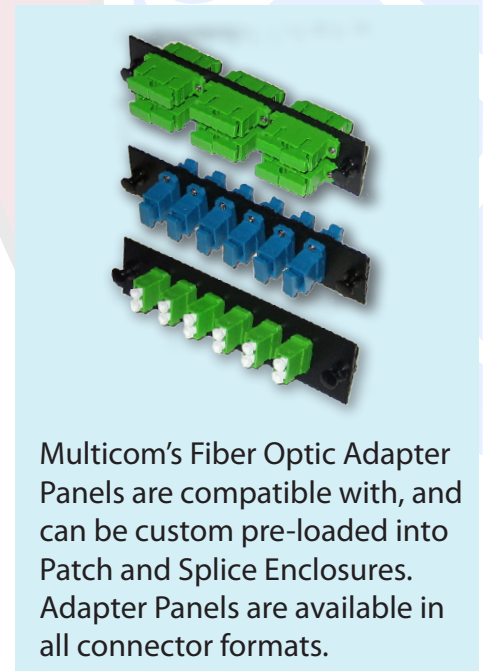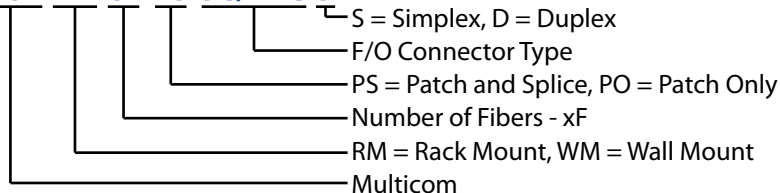

[www.multicominc.com](http://www.multicominc.com)

Multicom, Inc.  
Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: [multicom@multicominc.com](mailto:multicom@multicominc.com)