

Lashing Wire Clamps

DCD **Lashing Wire Clamps** are furnished with double ended stud bolt and washers and free running nuts, all galvanized. Non metallic type clamps are also available but be sure to specify strand diameter.




DCD part #	Model	Strand size	Type	Clamps/box	Weight
61090-001	D-901	.250"/.437"	Two Piece	100	11 lb.
61090-002	E-902	.250"/.375"	One Piece	100	11 lb.
61091-228	NM-LC5-1	.228"/.256"	Non-metallic	100	5 lb.
61091-307	NM-LC5-1.5	.307"/.342"	Non-metallic	100	5 lb.
61091-351	NM-LC5-2	.351"/.394"	Non-metallic	100	5 lb.
61091-404	NM-LC5-4	.404"/.452"	Non-metallic	100	5 lb.
61091-449	NM-LC5-6	.449"/.511"	Non-metallic	100	5 lb.
61091-453	NM-LC5-7	.453"/.546"	Non-metallic	100	5 lb.
61091-513	NM-LC5-8	.513"/.586"	Non-metallic	100	5 lb.

Temporary Lashing Wire Clamps

Use the 62560-000 to temporarily secure lashing wire to a termination point in mid-span or at a pole. This clamp is machined from solid cold drawn brass with a plated screw to eliminate corrosion if inadvertently left on strand for an extended period. This clamp assures maximum in-field life.

DCD part #	Model	Dimensions	Weight
62560-000	LC5	4" x 2" x 2"	3/4 lb.

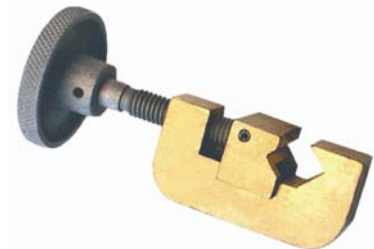

Corner Blocks

The DCD **Corner Block** is used to guide cable around turns whether you are pulling cable in the horizontal or vertical position. The Corner Block maintains a 19" radius through the arc of the corner block. The Corner Blocks can be used for pulling in copper, fiber optic or coaxial cables. There are two adjustable rollers used to secure cable in the Corner Block.

DCD part #	Model	Degree of arc	Weight
62000-000	CB-45	45 deg.	14 lb.
62100-000	CB-90	90 deg.	20 lb.



Available through

Multicom, Inc.

1076 Florida Central Parkway, Longwood, FL 32750

Ph: 407-331-7779 Toll Free: 800-423-2594 Fax: 407-339-0204

www.multicominc.com

multicom@multicominc.com