


## Eagle Lasher

### Series 61700

The all new **Eagle Lasher** is the last word in aerial cable lashing. If you are installing 1 or 2 small fiber optic cables or coaxial cable, then why use a larger lasher when a small one will do the job. The new **Eagle** weighs just 25 lbs. Imagine how easy that would be for transferring around poles or lifting in to position.

Like all the DCD lashers, the **Eagle** does not need traction from the strand to drive it, it uses the tension from the lashing wire to do that. With a bundle capacity of 2-1/4" or single cable up to 2", this lasher will single or double lash most Telecom or CATV installations.

This lasher uses standard wire spools that are loaded into a drop down holder which offers added convenience.

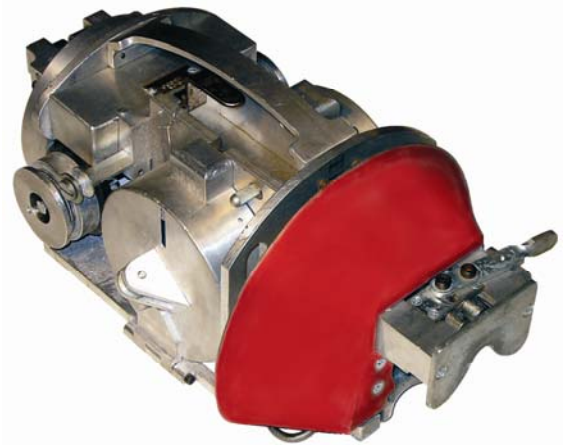

\*\*\* NOTE! This product is still under development, but is expected to be available by July 2006 \*\*\*

DCD Part #	Model	Max Strand	Max Lash	Wire Size	Spool size	Overall Dims	Weight
61700-000	Eagle	1/2"	2-1/4" dia.	.038" - .045"	1200 ft / coil	18" x 8" x 8"	25 lb.

## Model K and Special K Lashers

### Series 61500 & 61600



The **Model K** pull type Lasher handles just about any size lashing job. Use it to single- or double-lash a single cable up to 3 1/2" outside diameter and multiple cables up to a combined outside diameter of 4 5/8".

The rotating drum on the Model K makes one revolution every 13". Load both payout reels to create a double lash with a support every 6 1/2"..... or load one payout reel for a single lash support every 13". As with all DCD lashers the Model K operates without strand traction, even in bad weather. You control the tension of the lashing wire in the field by adjusting the tension rollers.

Use the Model K in wet weather or in tight places in trees. Front end ratchets prevent the lasher from backing up on the strand when forward pressure is released. Thanks to the wire friction drive feature of the Model K you may overlap existing cable without removing the old lashing wire. The Model K uses all types and sizes of lashing wire from .045" to .091". The 1AK metal reel and a cone shaped hub are optional features. The straight hub wire spool is standard.

The **Special K** Lasher handles the oversized lashing jobs. Use it to single or double lash a single cable up to 5-1/4" outside diameter and multiple cables with up to 5-3/4" combined outside diameter.

The rotating drum of the Special K Model makes one revolution every 18", double lashing with support every 9". As with all DCD lashers, the Special K operates without traction from the strand to drive the lasher.

The Special K uses all types and sizes of lashing wire (from .045 to .091) without modification to the lasher. The lashing wire tension is fully adjustable on this lasher.

DCD Part #	Model	Max Strand	Max Lash	Wire Size	Spool size	Overall Dims	Weight
61500-000	K	1/2"	4-5/8" dia.	.045" - .091"	1200 ft / coil	19" x12" x 12"	39 lb.
61600-000	Special K	1/2"	5-3/4" dia.	.045" - .091"	1200 ft / coil	19-1/2" x12" x 12"	50 lb.

*Available through* **Multicom, Inc.**

1076 Florida Central Parkway, Longwood, FL 32750

Ph: 407-331-7779 Toll Free: 800-423-2594 Fax:407-339-0204

www.multicominc.com

multicom@multicominc.com