


# SIGNAL CABLE

IMSA Spec 20-1 • **Solid Conductor**

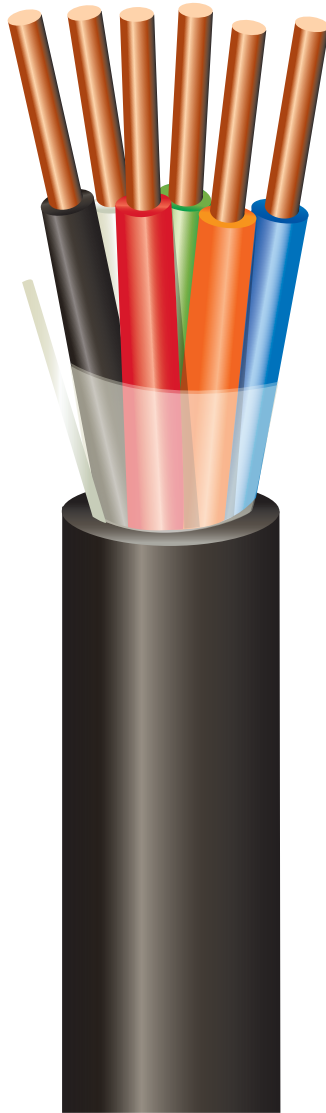

## Cable Identification

Indent print on jacket  
 “ADVANCED DIGITAL CABLE,  
 INC. IMSA 20-1 YYYY\* 600V”

*\*replace YYYY with year of manufacturer*

Inkjet print on reverse side of  
 jacket with footage markers.

Specifications		Color Code	Put-Ups
<b>Conductor</b> - Solid Bare Copper per ASTM B-3 <b>Insulation</b> 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	<b>Jacket</b> - PE <b>Voltage Rating</b> - 600 V <b>Temp. Rating</b> - 75°C	Per Specification, See Color Code Tables on Page 15.	Standard Reels 2,500' and 5,000' <i>Other lengths available. Please                      consult your factory representa-                      tive for availability.</i>

PART NO.	NO. OF COND	OUTER JKT THICKNESS		NOMINAL O.D.		WEIGHT lbs. / 1M'
		INCH	mm	INCH	mm	
<b>14 AWG</b>						
8202	2	.045	1.143	.322	8.18	58
8203	3	.045	1.143	.339	8.61	75
8204	4	.045	1.143	.369	9.37	94
8205	5	.045	1.143	.402	10.21	113
8207	7	.045	1.143	.435	11.05	146
8209	9	.060	1.524	.538	13.67	186
8210	10	.060	1.524	.580	14.73	220
8212	12	.060	1.524	.597	15.16	254
8214	14	.060	1.524	.626	15.90	325
8215	15	.060	1.524	.660	16.76	311
8216	16	.060	1.524	.660	16.76	325
8219	19	.060	1.524	.694	17.63	375
8220	20	.060	1.524	.729	18.52	395
8221	21	.060	1.524	.729	18.52	413
8225	25	.060	1.524	.808	20.52	478
8226	26	.060	1.524	.808	20.52	501
<b>12 AWG</b>						
8602	2	.045	1.143	.376	9.55	58
8603	3	.045	1.143	.397	10.08	75
8604	4	.045	1.143	.434	11.02	94
8605	5	.045	1.143	.475	12.07	113
8607	7	.045	1.143	.514	13.06	146
8609	9	.060	1.524	.634	16.10	186
8610	10	.060	1.524	.688	17.48	220
8612	12	.060	1.524	.709	18.01	254
8616	16	.060	1.524	.787	19.99	325
8619	19	.060	1.524	.829	21.06	395
8620	20	.080	2.03	.913	23.19	631
8621	21	.080	2.03	.913	23.19	652
8625	25	.080	2.03	1.010	25.65	760



Purchase from Multicom  [www.multicominc.com](http://www.multicominc.com) | 800-423-2594