





Fiber Storage Unit

Fiber Storage Units are used to conveniently and safely store an extra length of cable along the support strand for later use. Furnished as pairs (kit contains two fiber storage units and two sets of hanger brackets), these FSU's feature all aluminum, baked acrylic enamel finish or dielectric polypropylene with UV inhibitor. All basic hardware for attachment to the support strand is provided. Strand mount support brackets meet Telcordia® specification and are REA accepted. Galvanized strand clamping devices accommodate 1/4" to 7/16" strand and meet ASTM specifications A153 and B695.

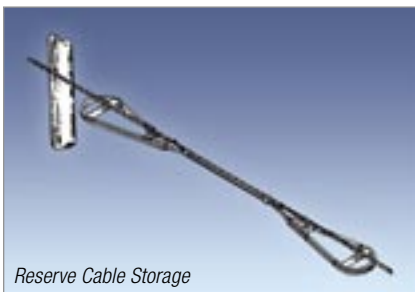


Features

- Small profile and a side facing channel to minimize ice load
- All aluminum construction with welded cross members
- Baked acrylic enamel finish/chromate pre-finish per MIL-C-5541-B
- Contains 2% carbon black as a UV inhibitor (dielectric version)
- Basic hardware (bolts, nuts and washers) and strand mount support brackets included
- Tie-wrap slots for securing cable from sliding
- Strand mount support brackets meet Telcordia specification and are REA accepted
- Galvanized strand clamping devices accommodate 1/4" to 7/16" strand

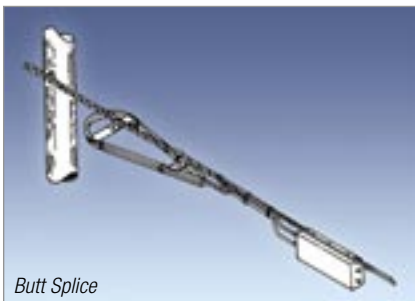

Specifications


PARAMETER	FSU-10	FSU-12	FSU-16	FSU-18	FSU-20	FOSP-17-TMK (DIELECTRIC)
Nom. Channel Width in. (cm)	0.63 (1.60)	0.92 (2.34)	1.12 (2.84)	1.75 (4.45)	2.00 (5.08)	0.95 (2.41)
Min. Bend Diameter in. (cm)	10 (25.4)	12 (30.48)	16 (40.64)	18 (45.72)	20 (50.80)	17.5 (44.45)

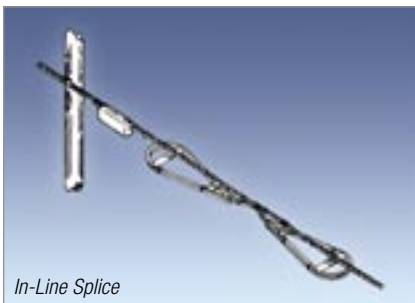

Ordering Information

DESCRIPTION	FSU-10	FSU-12	FSU-16	FSU-18	FSU-20	FOSP-17-TMK (DIELECTRIC)
FSU Kit Contains 1 pair FSU and 4 Mount Brackets	911107-00	911108-00	911109-00	911110-00	911944-00-00	FA000002
Replacement Mount Bracket (1 bracket, 4 req. per pair)	911115-00					
Tie Wraps (Quantity of 10)	911117-00					

Hardware Diagram

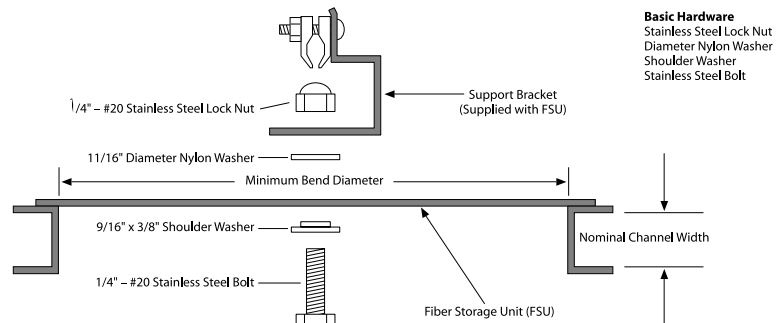

Order From:



Toll Free: 800-423-2594
www.multicominc.com
multicom@multicominc.com