

# SATELLITE INSTALLATION ACCESSORIES




**SG-10**  
SILICON GREASE - 3 Fluid oz.



**RTV-3**  
SILICON RUBBER SEALANT  
Clear, 3 Fl. Oz.



**ET-60**  
60 Ft. Electrical Tape (3/4" x 60')  
Color: Black

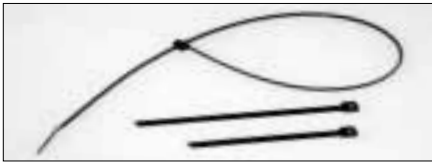

**CABLE TIES (Black)**  
U/V Resistance, UL Approved

Part #	Length	Looped Tensile	Max. Bundle Diameter
<b>CT-8</b>	8"	75 lbs.	2"
<b>CT-11</b>	11"	75 lbs.	3"
<b>CT-14</b>	14"	75 lbs.	4"



- CABLE CLIPS**
- CC-6** - For RG-59 Cable
  - CC-6L** - For RG-59 Cable
  - CC-7** - For RG-6 Cable
  - CC-7L** - For RG-6 Cable
  - CC-11** - For RG-11 Cable
  - CC-155** - For Dual RG-6 Cable
  - CC-155L** - For Dual RG-6 Cable



**AWB-1**  
RUBBER BOOT  
For both RG-59  
and RG-6 Cable



**ANC-1**  
SLEEVE ANCHOR  
With Hex Nut (3/8" x 2-1/4")  
For heavy duty applications  
in solid concrete, hollow  
block and brick.

## TERMINATORS



**AF-59TIG**  
5-2150 MHz  
25 dB Return Loss




**AF-59TB**  
75 Ohm AC/DC Blocked  
TERMINATOR

## GROUNDING PARTS



**COPPER GROUND STRAPS**  
A-24-6 - 6" Strap  
A-24-12 - 12" Strap

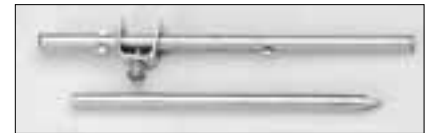

**A-21-4**  
4 FT. GROUND ROD WITH CLAMP

## 8 INCH FLAT CABLE



**FC-8**  
8" Flat cable

### Features:

- Slim line 8" flexible cable with "F" female connections molds to window sills and door jams to make installation easy
- No need to drill holes through walls

## PREMIER GROUNDING BLOCK SERIES - HIGH RETURN LOSS - 5-2300 MHz



**GB-1G**  
GROUNDING BLOCK  
Brass Splice Cast Base  
using Circular Contact Pin  
25-28 dB Return Loss  
5-2300 MHz



**GB-1GD**  
GROUNDING BLOCK  
Zinc Die-cast Splice using  
Circular Contact Pin  
25-28dB Return Loss  
5-2300MHz



**GB-2GD**  
GROUNDING BLOCK  
with two Zinc Die-cast Splices  
using Circular Contact Pin  
25-28dB Return loss  
5-2300MHz



**GB-3GD**  
DUAL GROUNDING BLOCK  
with 2 groundingholes for  
dual cable system 25-28dB  
Return Loss-5-2300MHz

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Toll Free: 800-423-2594  
www.multicominc.com  
multicom@multicominc.com