

MATCHING TRANSFORMERS




MT-75 MATCHING TRANSFORMER



MT-75P
PUSH-ON
MATCHING TRANSFORMER

Features:

- Push-on F-fitting for easy use.
- Non-strip piercing screws.
- High density PVC case.

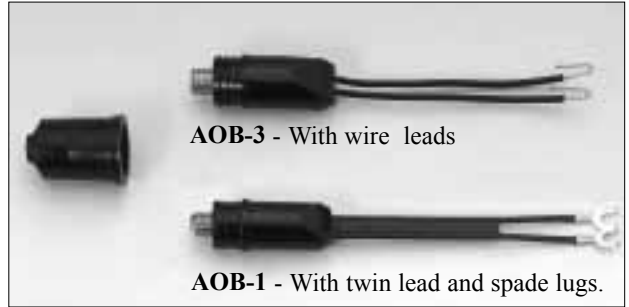

AOB-3 - With wire leads

AOB-1 - With twin lead and spade lugs.

OUTDOOR MATCHING TRANSFORMERS

Features:

- Heavy duty sealed molded housing.
- Weather boot included for weather protection.
- Resistance to moisture and sun.

FM SPLITTERS & SEPARATORS



UV-SJ
UHF/VHF BAND
SEPARATOR/COMBINER
VHF - 40-220MHz
UHF - 470-890MHz



HL-SJ
VHF LOW/HIGH BAND
SEPARATOR/COMBINER
LO - 5-108MHz
HI - 175-216MHz



FM TRAP
FMT 95- 108MHz
FT-88 88- 108MHz



FM-TV
TV/FM SPLITTER
Solder Back
FM - 88-108MHz
TV - 54-890MHz

BACK - MATCHED DROP TAPS



TAP-1()
Freq. Range 5 - 1000MHz
Available in dB value of
7, 12, 17, & 23dB
Specify Tap value
when Ordering

INLINE SLOPE EQUALIZER




EQ1G- ()
1GHz Equalizer

The EQ1G and EQ2G are an inline equalizer that compensates for the uneven Broadband frequency response often present in distribution system. The EQ1G is designed for 1GHz CATV system and EQ2G is for 950-2150MHz Satellite system. Typical slope are shown in chart below.

Equalizing value:


EQ1G- 3, 6, 9, 12 and 16dB.
Specify dB value when ordering

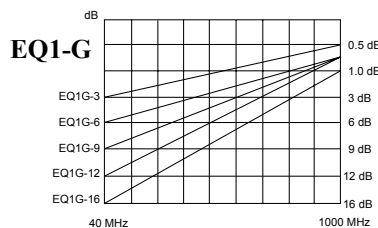

EQ2G- ()
2GHz Equalizer

Equalizing value:

EQ2G- 3, 6, and 9dB
Specify dB value when ordering

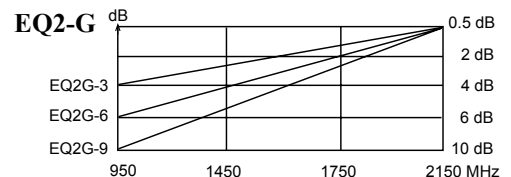

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Order From:



Toll Free: 800-423-2594
www.multicominc.com
multicom@multicominc.com