


OC Series

Passive Combiners

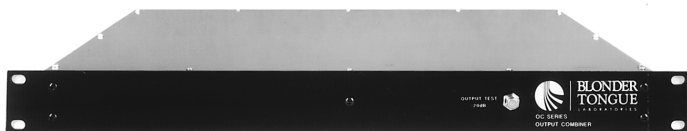

○ Features & Benefits

- -20 dB Test Port
- High Isolation, Low Net Combining Loss
- Rack Mountable - 1 EIA (1.75") Rack Space, (OC-16 is 2 Rack Spaces 3.5")

The OC Series are professional quality, passive output combiners. These units are designed for use in headends to combine the outputs of multiple modulators and processors. The OC Series employs radiation-proof passive components that provide excellent signal reproduction and years of reliable service. Three models are available, including: OC-8d, 8 inputs; OC-12d, 12 inputs; and OC-16, 16 inputs. The OC-8d, OC-12d and OC-16 feature high isolation between ports and a low net combining loss from each of the broadband inputs (5 to 1000 MHz). A 20 dB test port is provided for signal monitoring without disrupting service.

○ Specifications

RF	OC-8d	OC-12d	OC-16
Number of Inputs:	8	12	16
Frequency Range:	5-1000	5-1000	50-1000
Flatness - Relative to Slope:	0.4	±0.20	0.4
Slope:	2.75	1.50	2.5
Insertion Loss - Individual Port			
40 to 450 MHz:	11.5	18	24
450 to 1000 MHz:	13	18	26
Isolation - Adjacent Ports			
40 to 450 MHz:	25	38	40
450 to 1000 MHz:	25	38	36
Isolation - Non-Adjacent Ports			
40 to 1000 MHz:	40	65	62
Selectivity:	NA	NA	NA
Test Port Level:	-20	-20	-20
Impedance - All Ports:	75	75	75
Input Return Loss			
40 to 450 MHz:	20	20	18
450 to 1000 MHz:	19	20	16/14(c)
Output Return Loss			
40 to 450 MHz:	20	16	18
450 to 1000 MHz:	19	16	15
Mechanical			
Dimensions (WxHxD):	19.0 x 1.75 x 15.25 483 x 44 x 387	19.0 x 1.75 x 15.25 483 x 44 x 387	19.0 x 3.5 x 15.25 483 x 89 x 387
Weight:	6.5 2.95	7.0 3.18	10.5 4.77
Connectors (Rear Panel)			
RF Input:	"F" type, female	"F" type female	"F" type female
RF Outputs:	"F" type female	"F" type female	"F" type female
Connectors (Front Panel)			
Test Port:	"F" type female	"F" type female	"F" type female

○ Ordering Information

Model	Stock No.	Description
OC-8d	5957	Passive Combiner 5-1000 MHz, 8 Ports
OC-12D	5953	Passive Combiner 5-1000 MHz, 12 Ports
OC-16	5950	Passive Combiner 503-1000 MHz, 16 Ports, High Isolation, Front/Rear Test Ports

Available through **Multicom, Inc.** 1076 Florida Central Parkway, Longwood, FL 32750

Ph: 407-331-7779 Toll Free: 800-423-2594 Fax: 407-339-0204

www.multicominc.com