



# CABLE GUIDE ACCESSORIES



POWER CABLE ISNTALLATION

## Aluminum Split Bells



Plugs into conduit in manhole wall, guiding cable safely into the conduit regardless of the pulling angle.

Part Number	Size		Tube Length		Tube I.D.		Tube O.D.	
	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08041520	2	51	8	203	1.625	41	1.875	48
08041530	3	76	8	203	2.625	67	2.875	73
08041535	3.5	89	8	203	3.125	79	3.375	88
08041540	4	102	8	203	3.625	92	3.875	98
08041550	5	127	8	203	4.625	117	4.875	124
08041560	6	152	8	203	5.625	143	5.875	149
08041564	6	152	12	305	5.625	143	5.875	149
08041570	8	203	12	305	7.500	191	7.875	200



## Replacement Sheaves

Refer to this chart for specifications on sheave sizes for these products: 4,000 lb. (17,793 N) Hooked Hanger Sheaves, Cable Feeding Sheaves, Corner Cable Guides, Heavy Duty Quadrant Blocks, Three Sheave Cable Guides, and Jamb Skid.

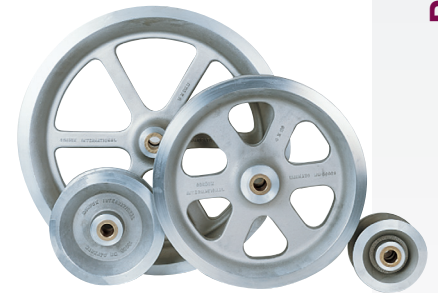

## Sheaves Specifications

Part Number	Nylatron Part Number	Sheave Size		Maximum Cable O.D. (A)		Min. Bending Radius (B)		Max. Sheave Width (C)		Maximum Sheave O.D. (D)		Shaft Diameter (E)	
		(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08539308	08539304	1 x 3	25 x 76	1.50	38	0.75	19	3.19	81	3.00	76	0.63	16
08539136	08539137	4 x 7	102 x 178	4.00	102	2.25	57	4.35	110	7.00	178	1.25	32
08539236	08539237	5 x 7	127 x 178	5.00	127	2.25	57	4.93	125	7.00	178	1.25	32
08046711	08046712	4 x 11	102 x 279	4.00	102	3.75	95	4.94	125	11.00	279	1.25	32
08046811	08046812	5 x 11	127 x 279	5.00	127	3.25	83	5.94	151	11.00	279	1.25	32
08087811	08087812	6 x 11	152 x 279	6.00	152	3.13	79	6.94	176	11.00	279	1.25	32
08087911	08087912	8 x 11	203 x 279	8.25	210	2.75	70	8.94	227	11.00	279	1.25	32
08065411	-	4 x 20	102 x 508	4.25	108	8.50	216	4.94	125	20.00	508	1.25	32
08042911	-	5 x 20	127 x 508	5.00	127	8.00	203	5.94	151	20.00	508	1.25	32
08043011	-	5 x 26.5	127 x 673	5.00	127	11.31	287	5.94	151	26.50	673	1.25	32

## 4,000 lb Sheaves

Part Number	Nylatron Part Number	Sheave Size		Maximum Cable O.D. (A)		Min. Bending Radius (B)		Max. Sheave Width (C)		Maximum Sheave O.D. (D)		Shaft Diameter (E)	
		(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08042612	08046812	5 x 11	127 x 279	5.00	127	3.25	83	5.94	151	11.00	279	1.25	32
08042621	-	5 x 20	127 x 508	5.00	127	8.00	203	5.94	151	20.00	508	1.25	32
08042627	-	5 x 26.5	127 x 673	5.00	127	11.31	287	5.94	151	26.50	673	1.25	32
08042651	-	8 x 26	203 x 660	8.00	203	11.25	286	8.94	227	26.00	660	1.25	32

NOTE: Nylatron® is a registered trademark of DSM.

