




Hooked Hanger Sheaves

Tie off in the manhole to guide cable into the duct. Also used with alignment arm for cable removal. Hinged yoke for easy cable installation and removal. 10,000 lbs. (44,480 N) cable tension load capacity. See replacement sheave chart for specifications on sheave sizes. Alignment arm sold separately. Replacement Sheaves available. See Specifications and Selection Charts on page 153.

| Part Number | Sheave Size | |
|-------------|--|-----------------------------------|
| | (in) | (mm) |
| 08041400 | 3 x 11 | 76 x 279 |
| 08042400 | 4 x 11 | 102 x 279 |
| 08042420 | 4 x 20 | 102 x 508 |
| 08042500 | 5 x 11 | 127 x 279 |
| 08042520 | 5 x 20 | 127 x 508 |
| 08042526 | 5 x 26½ | 127 x 673 |
| 08042527 | 5 x 26½ | 127 x 673 w/Light Duty Hanger Arm |
| 08082600 | 6 x 11 | 152 x 279 |
| 08082800 | 8 x 11 | 203 x 279 |
| 08045901 | Alignment arm for 3, 4, & 5" (76, 102, & 127 mm) sheaves | |

Hooked Hanger Sheave Assembly with 26½" (673 mm) Sheave

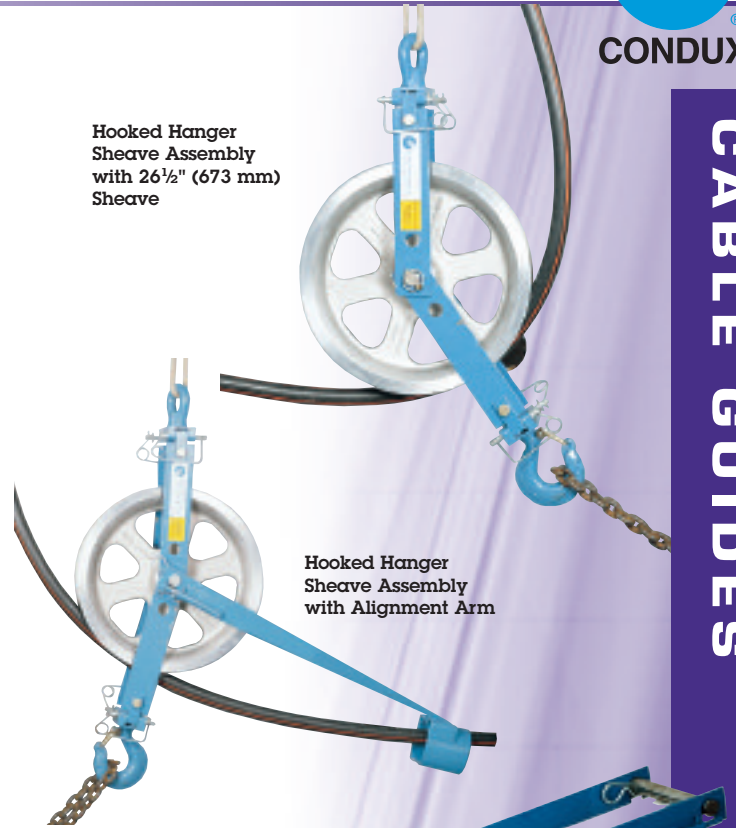

Hooked Hanger Sheave Assembly with Alignment Arm


Alignment Arm (sold separately)

4,000 lb. Hooked Hanger Sheaves

Tie off in manhole to guide cable into and out of duct. 4,000 lbs cable tension load capacity. For less demanding cable pulling applications than Condux 10,000 lbs sheaves. Replacement Sheaves available. See Specifications and Selection Charts on page 153.

- Steel welded frame
- Nylon cable protectors
- Lightweight
- Cast aluminum sheaves
- Forged hook with 1.12" opening

| Part Number | Sheave Size | | |
|-------------|-------------|-----------|----------|
| | (in) | (mm) | |
| 08042611 | 5 x 11 | 127 x 279 | Aluminum |
| 08042610 | 5 x 11 | 127 x 279 | Nylatron |
| 08042620 | 5 x 20 | 127 x 508 | Aluminum |
| 08042626 | 5 x 26½ | 127 x 673 | Aluminum |
| 08042650 | 8 x 26 | 203 x 660 | Aluminum |

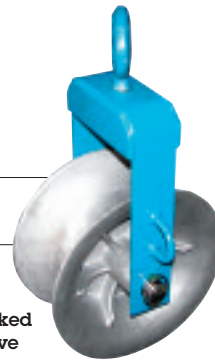

4,000 lb. Hooked Hanger Sheave

