



TMX-2200

200G Transponder and Muxponder

Optelian's TMX-2200 is an ideal DWDM transport solution for 100 GbE or OTU4 services. It interfaces to standard 100G SR4 or LR4 client optics, and incorporates a CFP2-DCO pluggable line interface with a software programmable DWDM modulation format that can operate in 100G DP-QPSK or 200G DP-16QAM mode. Up to two 100G client services can be transported over a single DWDM wavelength with optional physical layer encryption. It provides full client- and line-side performance monitoring for clear service demarcation, fault localization, and SLA assurance.

Features

- Single-slot OMS card
- Up to 2.6 Tb/s capacity in a single OMS-7190 shelf
- Physical layer encryption*

Line Interface

- CFP2-DCO
- 100G DP-QPSK or 200G DP-16QAM
- Coherent, fully-tunable
- SDFEC or HGFECC
- Performance monitoring

Client Interface


- Two QSFP28
- 100 GbE and OTU4
- SR4 and LR4
- RMON and OTU4 performance monitoring

* requires optional software feature

Overview

The TMX-2200 provides efficient transponding and DWDM transport for 100 GbE and/or OTU4 client services. It incorporates a pluggable CFP2-DCO with a software programmable modulation format, and fully-integrated coherent transceiver, including DSP. The line signal can be set to SDFEC for the longest possible reach, or staircase HGFECC for interoperability. It can be used for point-to-point DWDM links of any distance with up to 26 dB link budget, or provide all-optical transmission over 1000 km or more in amplified systems. Integrated physical layer encryption capabilities are also available*.

The two QSFP28 client interfaces allow two 100G client signals to be muxponded onto a single 200G DWDM wavelength, or a single 100G client signal to be transponded onto a single 100G DWDM wavelength. The client interface supports 100 GbE and/or G.709 OTU4 protocols using a QSFP28 SR4 or LR4.

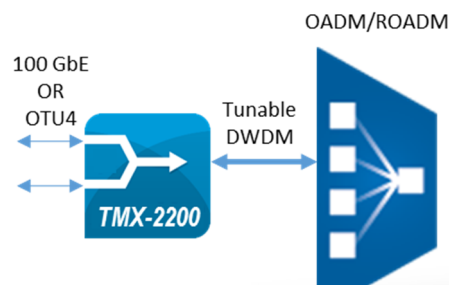

Application

The TMX-2200 is compatible with the ITU flexible grid, and 100 GHz and 50 GHz fixed grids, allowing it to be used with existing DWDM OADM and/or ROADM infrastructure. As a Layer 1 networking device, it transports client services at the full 100G data rate with deterministic low latency. The software programmable line interface allows for a trade-off between reach and spectral efficiency, depending on the OSNR of a given wavelength circuit. Where high spectral efficiency is desired for very long wavelength circuits, the reach can be extended to any distance using the RGN-2200 configured as a bi-directional regenerator for 100G DP-QPSK or 200G DP-16QAM wavelengths.



Specifications

| Parameter | Value |
|---------------------------------------|--------------------------------|
| Card type | OMS, single slot |
| Line interface | CFP2-DCO |
| Client interface | 2 QSFP28 SR4/LR4 |
| Line modulation (programmable) | 100G DP-QPSK, 200G DP-16QAM |
| Client protocols | 100 GbE, OTU4 |
| Performance monitoring | RMON, OTU4 |
| OSNR sensitivity | 11.5 dB (100G) 20 dB (200G) |
| FEC | GFEC, HGFE, SDFEC |
| Encryption | ODU4 AES 256 |
| Line PMD tolerance | 30 ps (100G) 15 ps (200G) |

| Parameter | Value |
|----------------------------------|------------------------------------|
| CD tolerance | 40 ns/nm (100G) 20 ns/nm (200G) |
| Line transmit power | +1 dBm |
| Line receiver range | -18 to 0 dBm |
| Line receiver sensitivity | -25 dBm |
| Channel spacing | 50 or 100 GHz** |
| Tuning range | 191.25 to 196.1 GHz** |
| Power consumption | 45 Watts maximum |
| Operating temperature | -5°C to 55°C (23°F to 131°F) |
| Storage temperature | -40°C to 85°C (-40°F to 185°F) |
| Compliance | GR-63-CORE ITU G.709, RoHS |

**flexible grid supported in future software release

Ordering Information

| Model Number | Part Number | Description |
|--------------|-------------|---|
| TMX-2200 | 1029-3100 | TMX-2200 200G Transponder and Muxponder |

Purchase from Multicom **MULTICOM** www.multicominc.com | 800-423-2594

