


DESCRIPTION:

The ETC Network Interface Device (NID) is a high-quality enclosure specifically designed to house fiber slack storage for the growing fiber-to-the-premises (FTTP) and broadband access markets.




This NID is specifically designed to complement Adtran, Calix, and DZS ONT deployments.

With a sleek compact form factor, this ASA thermoplastic enclosure can be used to house the excess fiber while providing the technician easy access at the point of installation. Specifically made for exterior wall mounting, it is environmentally sealed with dust and water resistance, and rubber grommets at the cable entry ports.

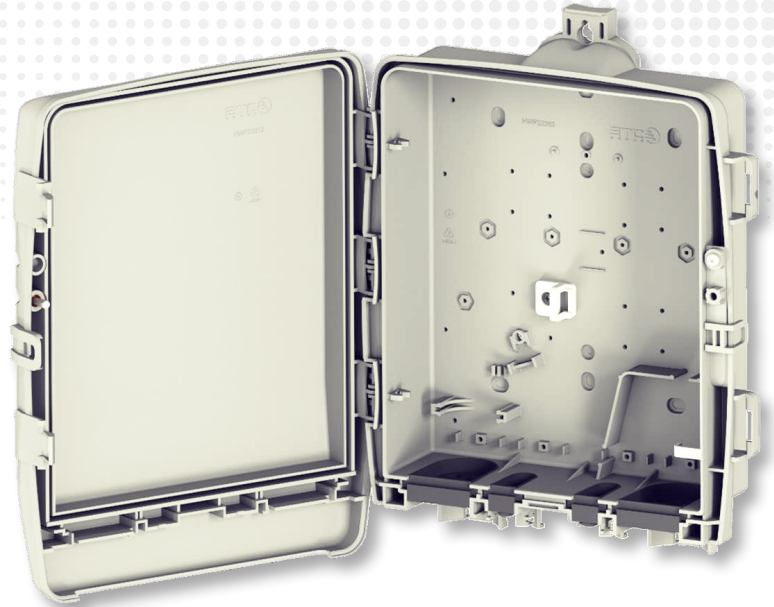

FEATURES:

- Flexible design accommodates many applications
- Compact, modular unit with a design that minimizes installation time with room for future expansion
- Flame-retardant and impact-resistant
- Made with engineering-grade thermoplastic
- Hinged cover for screw and padlock

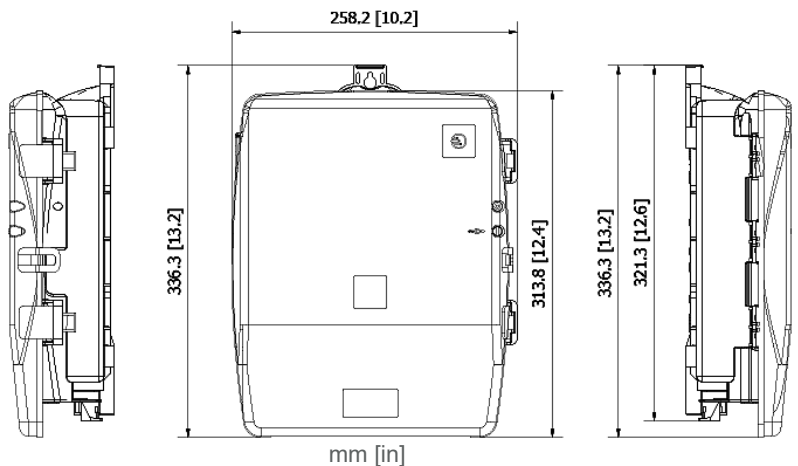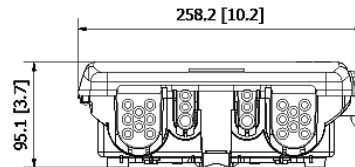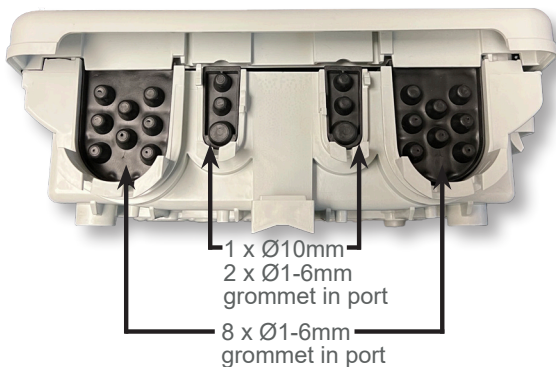

NID Parameters	Specifications
Max Cable Capacity	16
Cable Ports (W x D)	2 Ports - 2" x 1.6" (55 x 40mm) to accommodate included grommets 2 Ports - 1.5" x 0.7" (38 x 17mm) to accommodate included grommets
Mounting	Wall
Material	Body: Acrylonitrile Styrene Acrylate (ASA) Trays: Acrylonitrile Butadiene Styrene (ABS) Metal parts: Brass and Stainless Steel
Lockable	Yes
Grounding Kit	No
Color	Gray (RAL 1013)
Standards	IP 55 (EN 60529); KA 160H IEC 60068-2-11 (Test Ka: Salt mist); IK08 (EN 50102, C 20-015)
Dimensions (H x W x D)	13.2" x 10.2" x 3.7" (336 x 258 x 95mm)
Net Weight	2.0 lb (0.92 kg)
Included	2 x Cable protection grommets with 8 x Ø1-6mm ports 2 x Cable protection grommets with 1 x Ø10mm port, and 2 x Ø1-6mm ports