



AC Power Adapter

M-CPE-12-150-D-W-US

Key Features

- » Universal Input: 100-240VAC 50/60Hz
- » Highly efficient with low power consumption
- » Short-circuit protection
- » Over-current protection
- » Over-voltage protection
- » Lightweight and compact




| Specifications | Description | Notes |
|-------------------------------|--------------------------------|-----------------------|
| Input Characteristics | | |
| AC input voltage | 100-240VAC | Variable to 90-264VAC |
| AC input current | 0.5A | |
| AC frequency | 50/60 Hz | Variable to 47/63 Hz |
| AC Plug type | US | Wall |
| Output Characteristics | | |
| Voltage | 12VDC | |
| Rated Load | 1.5A | |
| Output power | 18W | |
| Power cord | 22AWG | UL2468 |
| Power cord length | 1000mm | 39 Inches |
| Output power plug | 5.5 x 2.0 x 9.5mm barrel (min) | DC power plug |
| Polarity | Center positive | ⊖ ⊕ |
| Environmental | | |
| Operating temperature | 0 to 40°C | 32 to 104°F |
| Storage temperature | -10 to 80°C | 14 to 176°F |
| Humidity | 25 to 75% | @ 0 to 40°C |
| Dimensions | 70L x 45W x 30H | mm |
| Compliance | EMI, UL, RoHS, CE, ISO 9001 | Indoor use only |

Description

The Multicom wall mount **M-CPE-12-150-D-W-US** provides 12 volts of DC power, up to 1.5 amps, to devices that require low voltage direct current.



M-CPE-12-150-D-W-US Part# Matrix Sample

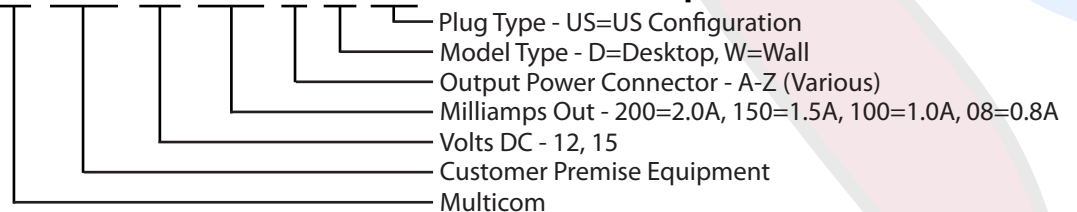

www.multicominc.com

Multicom, Inc.
Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: multicom@multicominc.com