



HD Digital Encoder Deluxe

Product Specifications




Description

Multicom's MUL-HDENC-C-200 delivers crystal-clear digital HD video distribution over your existing coax cabling from your HDMI, component, and composite video sources. User may select output as QAM, ATSC, ISDB-Tb, or DVB-T.

This single channel QAM, MPEG2, Encoder/Modulator unit allows you to easily distribute customized SD and Full HDTV content, up to 1080p resolution, on any of 134 channels – to an unlimited number of displays, using the TV's built in tuner, eliminating the need for cumbersome, expensive set-top-boxes or media players at each display.

This Encoder/Modulator is perfect for multi-video distribution in the commercial and institutional markets, and existing networks can easily and inexpensively include Full HDTV content. Regardless if you are moving HD content around a hotel, sports bar, senior living facility, convention center, student-housing complex, apartment building, stadium, or arena, the compact and economical Multicom MUL-HDENC-C-200 HD Digital Encoder has the powerful features you need.

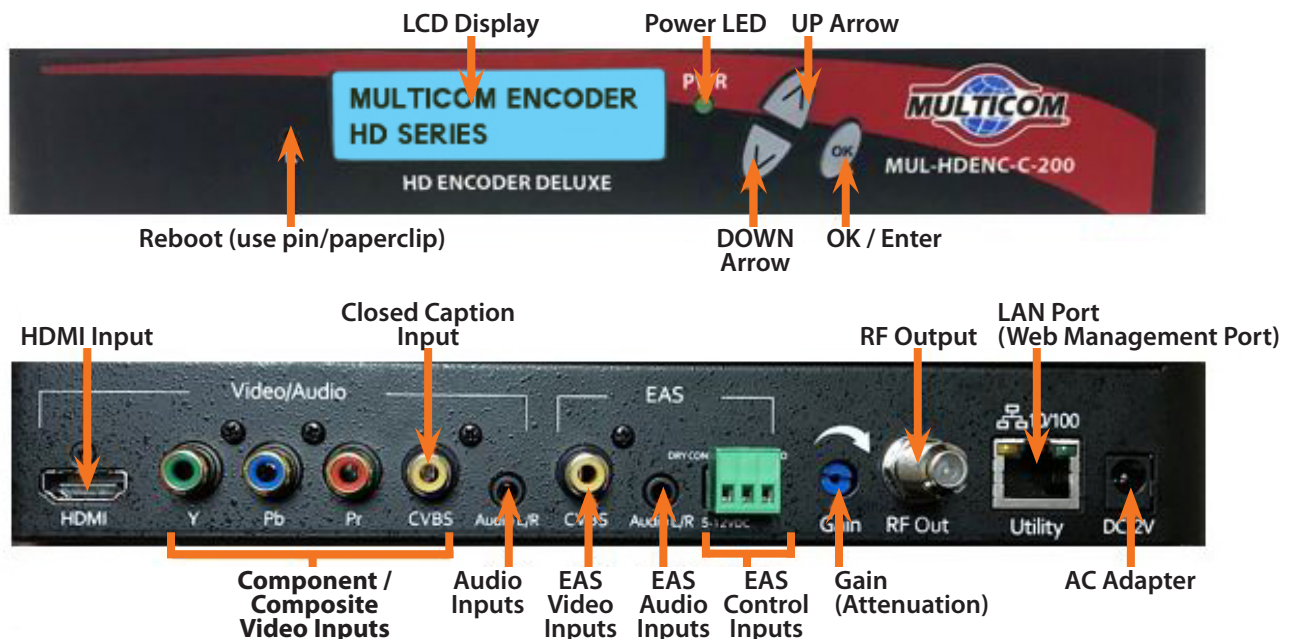

MUL-HDENC-C-200-NA

- NA = Default USA: QAM
- MX = Default Mexico: ATSC
- CO = Default Columbia: DVB-T
- LA = Default Latin America: ISDB-Tb

www.multicominc.com

Multicom, Inc.
Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: multicom@multicominc.com



HD Digital Encoder Deluxe

Product Specifications

Inputs	
HDMI, Component, Composite	1.4v
EAS	EIA-608, RCA (CC), 3.5mm, Dry Contacts
Audio Inputs	
Audio Input	HDMI Embedded, Analog
Video Encoder	
Video Codecs	MPEG-2 VBR
Video Resolutions	1080p, 1080i, 720p, 480p, 480i
Audio Encoder	
Audio Compression	MPEG-1 Layer II, MPEG-4 AAC
RF QAM Support	
Frequency	QAM: 57-861 MHz (CH 2-CH 135) ATSC: 57- 803 MHz (CH2 - CH 69) ISDB-Tb: 177-803 Mhz (CH7 - CH 69) DVB-T: 6MHz: CH: 2-69, 57~803MHz 7MHz: CH: 6-9, 9A, 10-12, S11-S45, 21-69 8MHz: CH: E2-E4, X-Z, Z1, Z2, S1-S10, E5-E12, S11-S41, E21-E69
RF CH Output (Programs / QAM)	1 Program / 1 QAM
Constellation	J.83B: 64 QAM/ 256 QAM (STD/HRC/IRC) ATSC: 8-VSB ISDB-Tb: 16 QAM/64 QAM DVB-T: 16 QAM/64 QAM
RF Level Output	+35dBmV Typical
MER	>37dB (38dB Typical)
Interleaver	Supported
Modulator Modes	RF QAM, ATSC, ISDB-Tb, DVB-T, user selectable
VCN	VCN Auto, VCN Manual, VCN 1-Part
Attenuation	0 – 20dB (manual)
RF Output	"F"- Female 75Ω
Management / Control	
GUI Supported	FireFox, Chrome, Safari, EDGE
Languages	English, Spanish (Web GUI)
Closed Caption	J.83 QAM, ATSC
Password Protected	Front Panel, Web Interface
General	
Dimensions	9.3" x 5.75" x 1.3"
Front Panel	LCD Front Panel Control/Status
Power Supply	12VDC, 1.5Amp

Features

- HDMI, component, and composite input, RF QAM, ATSC, ISDB-Tb, and DVB-T user selectable output
- Closed captioning on ATSC and QAM
- Adjustable Attenuation
- RJ-45 port for web configuration
- Video resolution up to 1080p
- Perfect, clean, and clear picture on high motion video, sports, text crawls/rolls, etc.
- Front panel LCD for easy setup
- Cool and silent operation



19" Rack Mount Bracket Kit & Wall Mount Accessories Included

HD Digital Encoder Deluxe Kit Includes:

- 2 x 19" Rack Mount Brackets
- 2 x RCA to 1/8" Adapter Cables
- 6' HDMI Cable
- AC Adapter
- Wall Mount Brackets & Screws
- Screws for 19" Rack Mount Brackets

MUL-HDENC-C-200-NA

- NA = Default USA: QAM
- MX = Default Mexico: ATSC
- CO = Default Columbia: DVB-T
- LA = Default Latin America: ISDB-Tb

www.multicominc.com

Multicom, Inc.
Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: multicom@multicominc.com