



# 4 Port Outdoor Optical Node


## Key Features

- » Advanced optical AGC circuit design, with the input optical power range of up to  $-6 \sim +2\text{dBm}$
- » RF operating bandwidth of 1GHz, with the highest output level  $\geq 108\text{dB}\mu\text{V}$  ( $+48\text{dBmV}$ )
- » The architecture uses an embedded modular design making it easy to maintain, replace, and upgrade
- » Available with optional WDM

## Description

MUL-OFN-V-M-FP-4-M outdoor optical node is bi-directional node specifically developed for HFC broadband networks. It accommodates the FTTH (Fiber to the Home) network topology, while addressing the issues of CATV bidirectional return channel noise and high reliability network security transmission requirements of modern CATV networks.

This outdoor optical node uses a modular architecture allowing fast, easy servicing, a variety of configurations, and easy upgrading. The RF amplifier section and the switching power supply module are in one modular unit in the bottom cover. The top cover can be populated with 1 forward optical receiver module, 1 reverse optical transmitter module and 1 optional Ethernet transponder/ Network Management module.

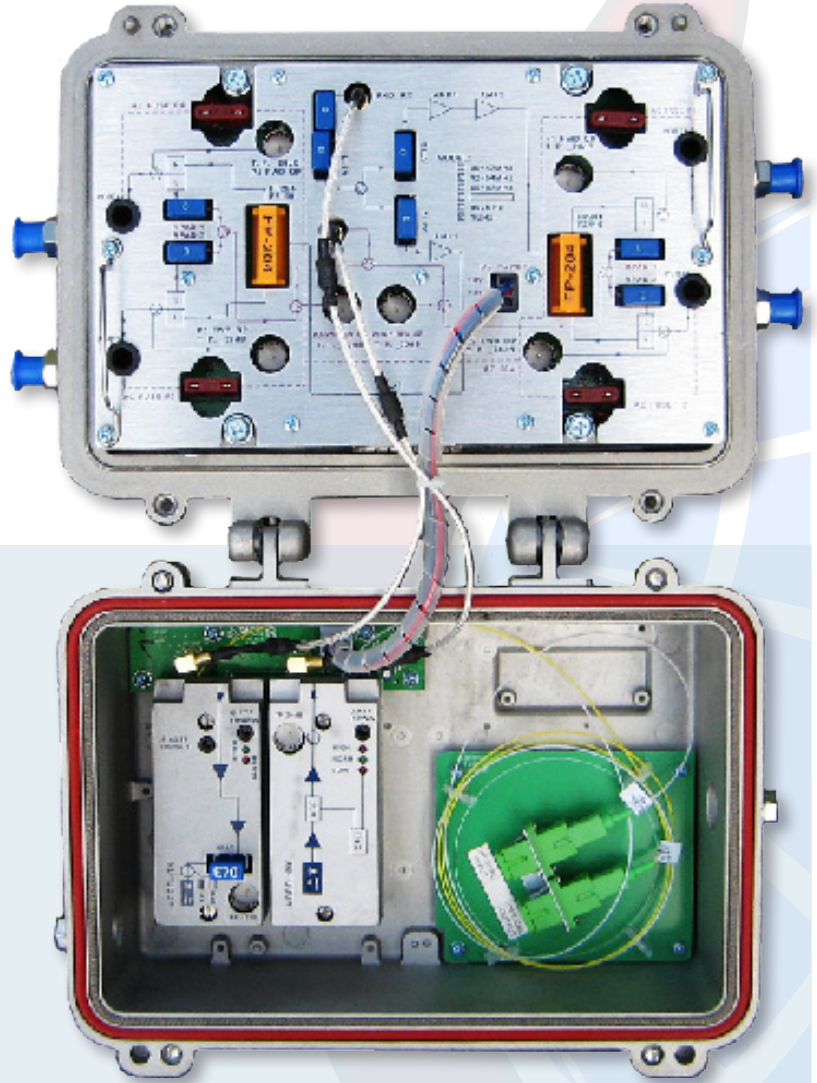

## MUL-OFN-V-M-FP-4-M-WDM

- Optional
- Case Size - S: Small, M: Medium, L: Large
- Number of Ports - 2, 4
- Laser Type - FP, DFB optional upgrade
- Interior Components - M: Modular, F: Fixed

[www.multicominc.com](http://www.multicominc.com)

**Multicom, Inc.**  
**Ph: 800-423-2594**  
**Fax: 407-339-0204**  
**Email: [multicom@multicominc.com](mailto:multicom@multicominc.com)**




# 4 Port Outdoor Optical Node

## Product Specifications

Item	Unit	Technical Parameter
<b>Forward Optical Receiver</b>		
Optical Parameters		
Optical Receiving Power	dBm	-6 ~ +2
Optical Return Loss	dB	> 45
Optical Receiving Wavelength	nm	1100 ~ 1600
Optical Connector Type		SC/APC
Optical Fiber Type		Single Mode
Link Performance		
C/N	dB	≥ 51
C/CTB	dB	≥ 65
C/CSO	dB	≥ 63
@84ch, Pin= -1dBm, output level 106dBuV, EQ 6dB		
RF Parameters		
Frequency Range	MHz	54 ~ 1003
Flatness in Band	dB	± 0.75
Rated Output Level	dBmV	≥ +46 (≥ 106 dBμV)
Max Output Level	dBmV	≥ +48 (≥ 108 dBμV) when input optical power -6 ~ +2dBm
Output Return Loss	dB	≥ 16
Output Impedance	Ω	75
<b>Return Optical Transmitter</b>		
Optical Parameters		
Optical Transmit Wavelength	nm	1310 ±10
Laser Type		FP Laser (DFB Laser is an optional upgrade)
Optical Output Power	mW	1
Optical Connector Type		SC/APC
RF Parameters		
Frequency Range	MHz	5 ~ 42
Flatness in Band	dB	±0.75
Input Level	dBmV	+15 ~ +25 (75 ~ 85 dBμV)
Input Return Loss	dB	≥ 16
Output Impedance	Ω	75
NPR Dynamic Range	dB	≥10 (NPR ≥30dB) using the FP laser, ≥15 (NPR ≥30dB) using optional DFB laser
General Statistics		
Power Voltage	V	AC35 ~ 90V/50-60Hz (insert power at any F-Port)
Operating Temperature	°C	-30 ~ +70 (-22 ~ +158°F)
Storage Temperature	°C	-30 ~ +70 (-22 ~ +158°F)
Relative Humidity	%	Max 95% no condensation
Consumption	W	≤ 34
Dimensions	mm	295 (L) x 210 (W) x 150 (H) (11.6in x 8.3in x 6in)

### MUL-OFN-V-M-FP-4-M-WDM

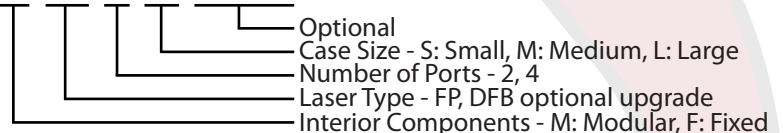

[www.multicominc.com](http://www.multicominc.com)

**Multicom, Inc.**  
 Ph: 800-423-2594 / 407-331-7779  
 Fax: 407-339-0204  
 Email: [multicom@multicominc.com](mailto:multicom@multicominc.com)