




OTDR Launch Cable Reel

Product Specifications

Description


Multicom's MUL-OTDR-LCR OTDR Launch Cable Reel is designed to aid in the testing of fiber optic cable when using an OTDR. The OTDR Launch Cable Reel is used with Optical Time Domain Reflectometers (OTDRs) to help minimize the effects of the OTDR's launch pulse on measurement uncertainty. The OTDR Launch Cable Reel is available in many different configurations and fiber lengths as needed.

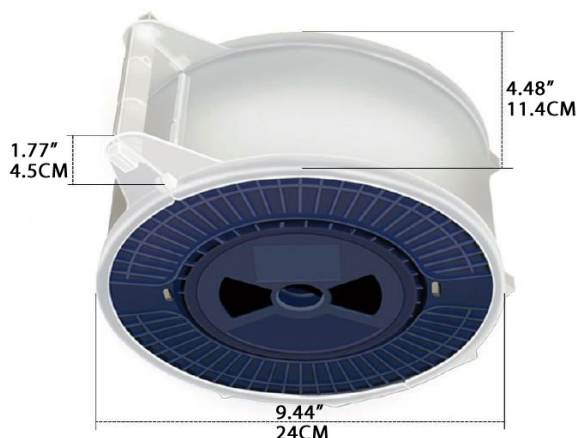

Parameter	Specification
Fiber cable	Singlemode, Simplex, G.652.D Bare fiber
Connector type	SC, FC, ST, LC/APC, UPC
Fiber length	10KM
Loss	0.4dB/KM@1310nm, 0.3dB/KM@1550nm
Insertion loss	≤0.2dB
Return loss	≥50dB
Repeatability	≤0.1
Interchangeability	≤0.2dB
Durability	≤0.2dB
Operating/Storage Temperature	-45 ~ 85°C (-49 ~ 185°F)

Features

- Compatible with Multicom's MUL-OTDR-500/-1000/-1100, and other OTDR brands
- Conveniently organized in a rugged lightweight case
- Available in custom lengths and connector types

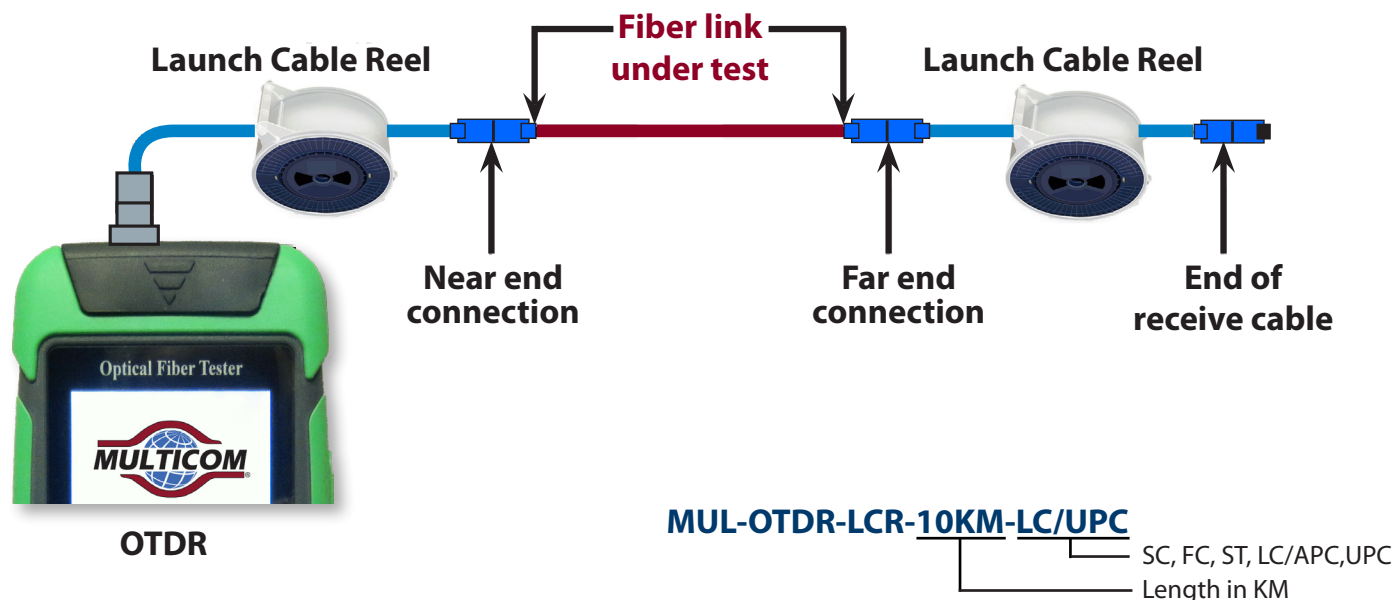

www.multicominc.com

Multicom, Inc.
Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: multicom@multicominc.com