




Description

The Multicom MUL-QuickVise-109 is used to splice/deadend galvanized steel messenger mid-span of a service drop. The QuickVise is designed to support both ends of self supporting multi-pair drop wire that uses a solid galvanized steel messenger wire.

Technical Specifications

- Rated to hold a minimum of 90% of Rated Breaking Strength (RBS) of the strand
- Recommended for use with common grade, high strength utility grade, aluminized and galvanized steel strand

Parameter	Specification
Shell Material	Aluminum Alloy
Yoke Material	Aluminum Alloy
Bail Material	Stainless Steel
Minimum Conductor Diameter	.102" (2.6mm)
Maximum Conductor Diameter	.114" (2.9mm)
Weight/each	.05 lbs (.04 kgs)
Standard Package	100 (9 lbs/4 kgs)

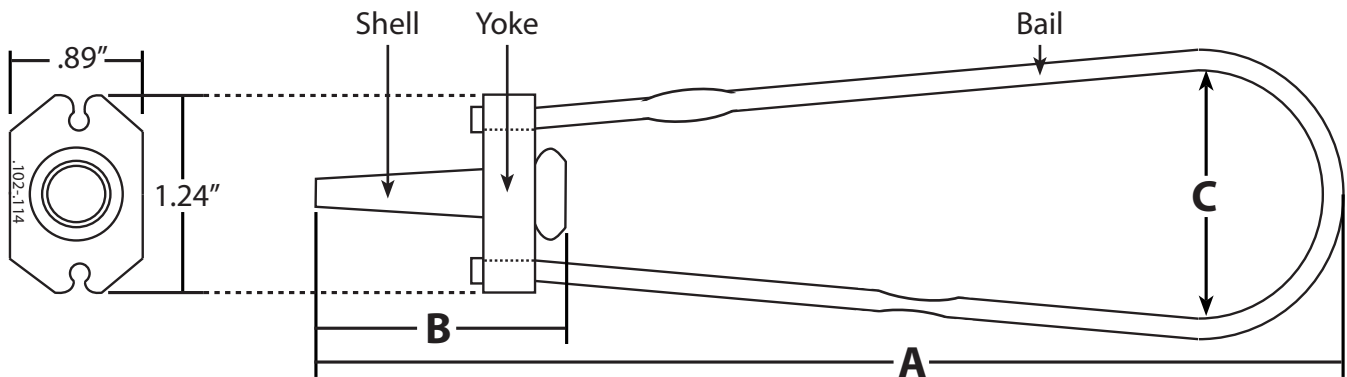

Part#	A	B	C
MUL-QuickVise-109	5.5" (139.7mm)	1.47" (37.33mm)	1.60" (40.64mm)

MUL-QuickVise-109

www.multicominc.com

Multicom, Inc.

Ph: 800-423-2594 / 407-331-7779

Fax: 407-339-0204

Email: multicom@multicominc.com