




1 RU Rack Mount - Custom Loaded Patch and Splice Enclosure

Product Specifications

Key Features


- Custom loaded to your specific configuration
- 1.5M Pigtailed included in loaded enclosures
- Splice tray and cable management spools included
- Accepts up to three LGX Adapter Panels
- Hinged front and rear Plexiglass doors
- Side patch and exit ports
- Fully removable sliding-out tray for easy access
- 16 gauge cold rolled steel construction
- Powder coat black finish
- Assorted strain relief and fiber accessories included
- Provides higher patch field density in fewer rack units saving valuable rack space

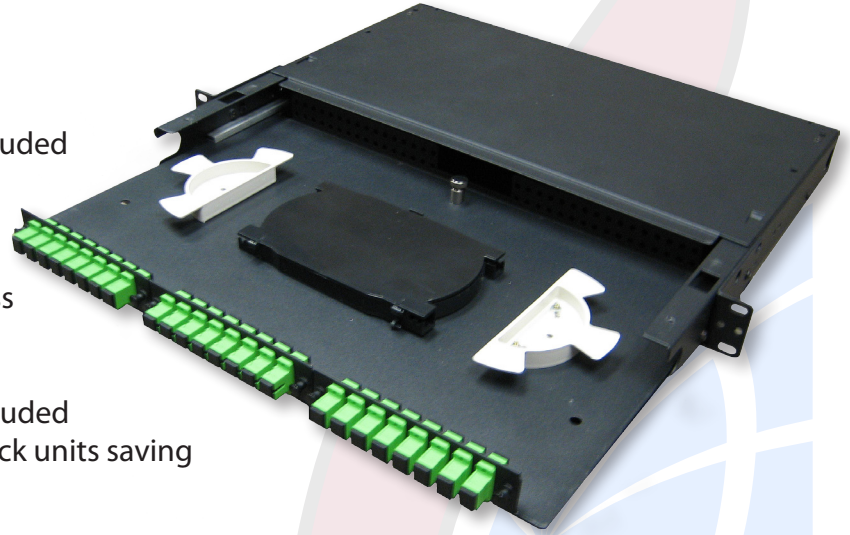

Description

The Multicom 1 RU Patch and Splice Enclosure is designed to accept up to 3 LGX Adapter Panels with the ability to use a full array of connector types. This enclosure offers a flexible solution, enabling the incorporation of a multi-functional chassis that allows easy access during installation or re-work with no disturbance of the existing fiber cable - making this one of the most flexible enclosures on the market.

Characteristics	Specification
Suitable for module type	LGX Adapter Panels
Number of module positions	3 - Can be Simplex/Duplex
Material	16 gauge, cold-rolled steel
Material finish	Black, powder coated
Operating temperature	-40 to 140°F (-40 to 60°C)
Height	1.75" (44.4mm)
Width	17" (432mm)
Depth	14" (356mm)
Net weight	13lbs. (5.9kg)

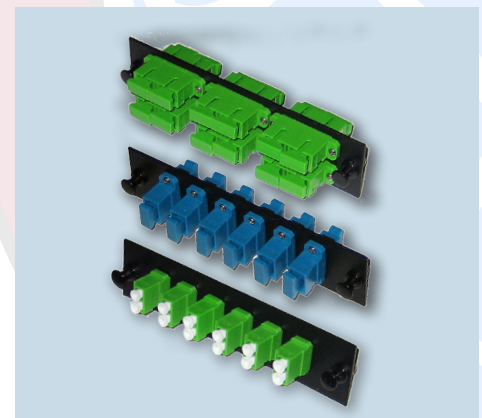

Multicom's Fiber Optic Adapter Panels are compatible with, and can be custom pre-loaded into Patch and Splice Enclosures. Adapter Panels are available in all connector formats.

Part#: MUL-xM-xF-Px-XX/YYY-X



www.multicominc.com

Multicom, Inc.
 Ph: 407-331-7779
 Fax: 407-339-0204

Email: multicom@multicominc.com