


Compact, High-Performance 1U Active Ethernet OLT/MDU ONU

- ✓ *High-Performance 1U AE OLT/MDU ONU (GPON and Active Ethernet Uplinks)*
- ✓ *24-Port Fast Ethernet (SFP-based, fiber or copper)*
- ✓ *SLMS family member supporting industry-leading multimedia traffic management*
- ✓ *Environmentally Hardened*
- ✓ *Fiber or Copper Fast/Gigabit Ethernet Uplinks with EAPS, RSTP (802.w), or LAG/LACP (802.3ad)*
- ✓ *Removable Fan Tray*
- ✓ *WebGUI, CLI, SNMP Management*

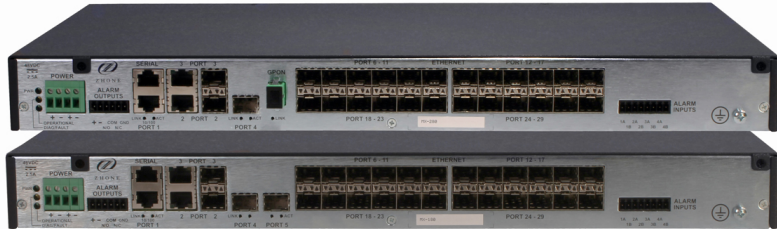

The Zhone MX-180/280 provides next generation Active Ethernet OLT/MDU ONU features in a compact, hardened form-factor that makes it easy and cost-effective to deliver uncompromising triple play services throughout serving area. Models are available with 24 Fast Ethernet Ports (SFP-based).

This MX family product is designed for easy configuration and management via built-in Web Graphical Interface. It's compact design allows easy deployment in remote cabinets and space constrained central offices.

The MX-180/280 offers multiple Fast/Gigabit Ethernet and GPON (MX-280 only) uplink interfaces. The Fast/Gigabit Ethernet interfaces on MX family products can be configured as linear, ring, or aggregated links.

Zhone's MX-180/280 Ethernet solution offers full-rate Fast Ethernet performance for packet-based service delivery. This low-power, fully programmable, high performance solution enables service providers to cost-effectively generate additional revenue through their triple-play offering, including the different iterations of video services emerging in the marketplace. As an end-to-end solution, Zhone offers Fast Ethernet ONTs and CO products to offer high-speed, long reach and low cost solutions for multi-tenant and multi-dwelling unit (MxU), remote terminal and CO deployments.

Ease of Management

MX-180/280 provides simple yet powerful management facility via embedded Web GUI along with complete NMS integration.

Triple Play Services

MX-180/280 includes high-performance packet switching with advanced IP capabilities to deliver secure, reliable, and efficient voice, data, and video services. Now service providers can offer compelling bundles of multi-line voice, high-speed Internet access, and multi-set IP video (including HDTV) over their existing fiber infrastructure.

MX-180/280 is defined by its ease of use and packet processing/switching capability to support rich triple-play services on each subscriber port.

Optical or Copper Transport

MX-180/280 provides multiple SFP-based and RJ45 Fast/Gigabit Ethernet uplinks, supporting both copper and fiber, to provide simple cost-effective transport. The FastE/GigE uplink ports allow daisy-chained linear or ring deployments, and on rings the MX-180/280 provides standards-based EAPS support.

End-to-End Access Management

The easy-to-use Zhone Management System (ZMS) provides OSMINE-certified management and provisioning across the access network, from CPE to the Central Office. The MX-180/280 is fully remote managed, allowing carriers to reduce service turn-up intervals, reduce truck rolls, and ultimately, improve customer service.

Technical Specifications

Dimensions

- 1.72in H x 17.32in W x 9.06in D
- 4.37cm H x 43.99 cm W x 23.02 cm D

Weight

- 10lbs (4.53kg)

Power

- DC: -43.75V to -59.90V
- Optional AC and Line Power Supplies

Interfaces

- Uplink Interfaces:
 - MX-180
 - (4) 100/1000Mbps Ethernet (Copper or Fiber) SFP slots
 - (2) 10/100/1000Mbps Ethernet (Copper) RJ45
 - MX-280
 - (1) GPON (Fiber) with SC/APC connector
 - (3) 100/1000Mbps Ethernet (Copper or Fiber) SFP slots
 - (2) 10/100/1000Mbps Ethernet (Copper) RJ45
- Subscriber Line Interfaces:
 - (24) 100Mbps Ethernet SFP slots (Copper or Fiber)
 - Serial craft management interface
 - 10/100BT management interface
 - Alarm Output & Input connections
 - Port Status LEDs

Standards Support

- ITU-T G.984 (GPON) (MX-280 only)
- IEEE 802.3 Ethernet
- IEEE 802.1p
- IEEE 802.1Q
- IEEE 802.w
- IEEE 802.3ad

Protocol Support

- IP host and gateway support
- EAPS RFC3619 support
- RIP v1 (RFC 1058) RIP v2 (RFC 2453)
- DHCP server (RFC 2131, 2132)
- DHCP Relay with Option 82
- Bridging 802.1D support
- VLAN 802.1p/q support
- RSTP 802.w support
- Link Aggregation and LACP 802.3ad support
- Dense / sparse multicast support, IGMPv2
- Integrated access control and content protection
- RADIUS Authentication

Management

- In-band IP
- Out-band IP over 10/100BT Ethernet or V.24 RS-232 serial for async terminal
- ZMS (Zhone Management System) via SNMP v2c for GUI and CORBA/XML Northbound interface
- Embedded Web Graphical Interface
- Command Line Interface (CLI)

Regulatory Compliance

- Safety
 - CSA 22.2 No. 60950-1
 - EN 60950-1
 - IEC 60950-1
 - UL 60950-1
- EMC Emissions
 - FCC Part 15 Class A
 - EN 55022 Class A
 - ICES-003 Class A
- EMC Immunity
 - EN 300 386 v1.4.1
- Environmental
 - ETS 300 019-2-x
 - ISTA Transportation and Handling

Operating Requirements

- Operating Temperature: -40°F to 149°F (-40°C to 65°C)
- Storage temperature: -40°F to 158°F (-40°C to 70°C)
- Humidity: Up to 85%, non-condensing
- Altitude: -200ft to 16,500ft (-60m to 5,000m)

Ordering Information

Models

MX-180	MX 24-PORT FE (SFP), 4 FE/GE, -48V DC (REQUIRES SFPS)
--------	---

MX-280	MX 24-PORT FE (SFP), 3 FE/GE, 1 GPON, -48V DC (REQUIRES SFPS)
--------	---

Accessories

XP-AC-SUPPLY	Raptor/MALC XP AC Power Supply, 90-264 VAC, 48 VDC, 150W
--------------	--

XP-CO-LP-SHELF	Raptor/MALC XP Line Power CO Shelf 40-60VDC IN, +/- 190VDC OUT, w/ 24 channels
----------------	--

XP-RT-LP-UNIT	Raptor/MALC XP Line Power RT Unit +/- 190VDC IN, 40-60VDC OUT, w/ 5 channels
---------------	--