



NEW!

WMRK SERIES CONFIGURED MULTI-VENDOR SERVER ENCLOSURE

Select a Configured WMRK for use with Servers from Leading Manufacturers

TIA/EIA COMPLIANT

Structural Features

- 24" overall width optimized for use on raised floors
- Fully welded construction provides a 1,000 lb. weight capacity
- Standard front and rear adjustable cage nut style rail with rear Z-rail adaptors accommodates most server-slide kits
- Numbered rackspace increments speed equipment mounting
- 14-gauge steel tops and bottoms, 16-gauge seamless steel sides and 11-gauge thickness where the rail brackets are welded to the sides. Each model is equipped with laser cut 8" thick internal braces made from structural steel which enhance strength and provide more useable internal space
- Racks gang together when fully loaded
- Finished in a durable black textured powder coat

Thermal Management

- Configured for Passive thermal management
- Front and split rear doors, and top option are perforated with a 64% open area to provide adequate ventilation
- Included temperature monitoring module in the face of the enclosure provides local monitoring and remote notification

Cable Management

- 2", 1", and 1/2" electrical knockouts found on rear plates, top knockout plate additionally includes UHF/VHF antenna knockouts
- Removable split bottom rear panel allows cable bundles to be easily passed over or under the WMRK's standard key-locking split rear doors
- Rack top includes UHF/VHF antenna knockouts and integral mounting points for 6", 9", 12" and 18" wide cable ladders
- Rack top includes five integral gland grommets 4" cable pass-throughs
- Designed to allow fully integrated racks to be ganged

Compliance

- Rail has been configured to accept servers and slide kits from all leading manufacturers
- Perforation on front and rear doors and top options meets server manufacturer warranty specifications
- Stud in base of rack facilitates the proper grounding and bonding of electronic equipment, as per NEBS and NEC standards




includes TEMP-DEC temperature monitoring module



space saving split rear door includes 3 point lock/latch

AVAILABLE IN 24 & 42 RACKSPACE HEIGHTS



Z-rail adaptor converts standard rackrail to "Z" rail, for side mount applications


36" or 42" (width) and 24" (depth)

WMRK-2436SVR

Comes Complete with:

- Fully perforated front door, locking
- Fully perforated split rear door, locking
- Fully perforated top
- Temperature monitoring module
- Vertical lacing strip, 3/4" width (42 space only)
- 6 mm cage nuts, 100 quantity
- 6 mm rack screws, 100 quantity
- 20 Amp, 20 outlet (42 space) or 10 outlet (24 space) corded power strip
- Side panels (models with sides only)
- Ganging hardware (models without sides only)

Top View

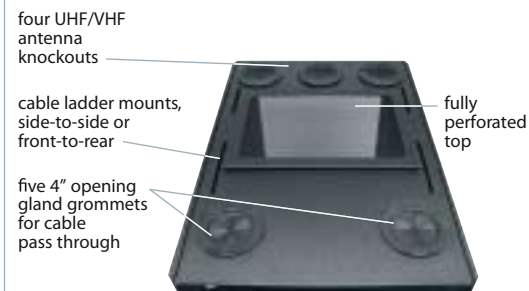

36" Outside Depth (33 Useable), with sides Part #	36" Outside Depth (33 Useable), without sides Part #	42" Outside Depth (39 Useable), with sides Part #	42" Outside Depth (39 Useable), without sides Part #	Racking Height	Overall Height
WMRK-4236SVR	WMRK-4236SVR-AB	WMRK-4242SVR	WMRK-4242SVR-AB	73 1/2" (42 space)	79 5/8"
WMRK-2436SVR	WMRK-2436SVR-AB	-	-	42" (24 space)	48 1/4"

Distributed by Multicom, Inc.


1076 Florida Central Parkway, Longwood, FL 32750

www.multicominc.com Toll free: 800.423.2594 Phone: 407.331.7779 Fax: 407.339.0204 multicom@multicominc.com

WMRK SERIES ENCLOSURE OPTIONS

<p>Vertical Lacer Bars</p>  <p>LACE-40-OP 40 space 3/4" wide lacer strip, sold in packs of 6, see pg. 91</p> <p>No need to fish in cable ties and straps—just slide them on!</p>	<p>Rackmount LCD</p>  <p>RM-KB-LCD rackmount LCD, keyboard and touchpad see pg. 84</p>	<p>Heavy-Duty Telescoping Rackshelf</p>  <p>VSA-2744 mounts to front and rear rail, 500 lb. weight capacity see pg. 123</p>
---	---	--


Horizontal Lacer Bars



<p>LBP-1.5 1.5" offset round rod with flattened ends, sold in packs of 10</p>	<p>LBP-1R4 4" offset round rod with flattened ends, sold in packs of 10</p>	<p>LBP-1S rectangular rod, sold in packs of 10</p>	<p>LBP-1R round rod, sold in packs of 10</p>	<p>LBP-1A "L" shaped lacer bar, sold in packs of 10</p>	<p>LBP-2A "L" shaped 2" offset lacer bar, sold in packs of 10</p>	<p>LBP-4A "L" shaped 4" offset lacer bar, sold in packs of 10</p>	<p>LBP-6A "L" shaped 6" offset lacer bar, sold in packs of 10</p>	<p>LBP-LTF lacer panel sold in packs of 10</p>
--	--	---	---	--	--	--	--	---

see pg. 90


Cable Ladders

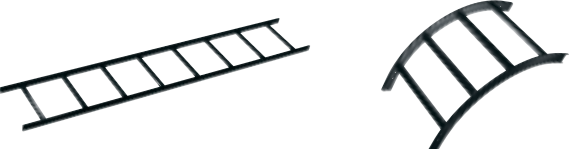

<p>CLB-6 6' long x 12" wide straight black ladder section</p>	<p>CLB-VO90 90° vertical outside bend, 12" wide black ladder section</p>
--	---

see pg. 93


Horizontal Cable Managers



<p>HCM-1 "micro-clip" style</p>	<p>HCM-1DR "D-Ring" style</p>	<p>HCM-2DV "D-Ring" style with end rings</p>
--	--	---


see pg. 91

Cable Management Accessories



<p>HCT-1 rackmount horizontal cable tray mounts on any 19" rack</p>	<p>BR1 brush grommet panel provides organized cable entry see pg. 92</p>	<p>TW12 8" long cable management straps are sold in 12 piece packs</p>
--	---	---

Additional Rail



Part #	Additional Cage Nut Rackrail	Additional Z-rail Adaptor
WMRK-42xx	PROWMRK-RR42	PROWMRK-ZRA-42
WMRK-24xx	PROWMRK-RR24	PROWMRK-ZRA-24

Distributed by Multicom, Inc.

1076 Florida Central Parkway, Longwood, FL 32750

www.multicominc.com Toll free: 800.423.2594 Phone: 407.331.7779 Fax: 407.339.0204 multicom@multicominc.com