

MULTICOM GPON/XPON SOLUTIONS



USA
TECHNOLOGY

Tecnología Americana

- USA Lasers
- USA IC Chipsets
- USA Amplifiers
- USA Fiber Optics
- USA Engineering & Designs
- USA Quality Assurance / Quality Control



DZS MXK-F SERIES OF GPON OLTs - DELUXE SERIES



MXK-F1419

Serving over 32 thousand GPON subscribers, the MXK F1421 offers growth potential at 128 GPON splits per OLT port and 2 x Terabit switching fabric.

The MXK-F™ Chassis architecture is designed around a dual star design with redundant ultra high-speed links to each subscriber line card slot for future-proof support of today's and tomorrow's bandwidth-hungry fiber-based subscriber services.



MXK-F219


Serving over four thousand subscribers, the MXK F219 2RU OLT offers growth potential up to 4,096 customers at 128 GPON splits per OLT port.



MXK-F108

The MXK-F108 high throughput, small form factor OLT serves 512 GPON Customers at 64 Optical Split Per OLT Port.

DZS ZNID SERIES OF GPON ONTs - DELUXE SERIES

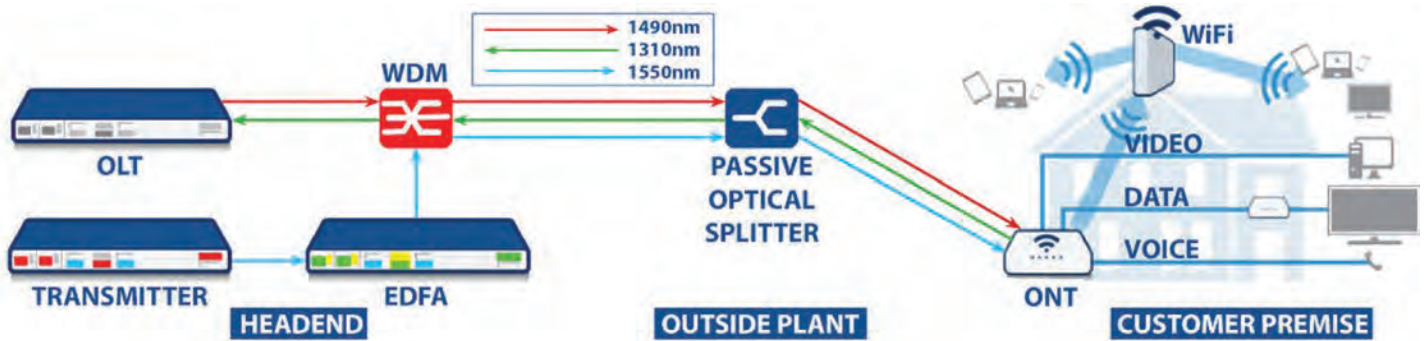

TYPICAL GPON NETWORK WITH RF OVERLAY



ZNID-GPON-2301

- Indoor Residential HSI Desktop ONT
- Built-in WAN transceiver, 1 RJ45 GE, ships with AC power supply, OMCI management
- Optional wall mount



ZNID-GPON-2726A1

- Indoor HSI Voice RF BGNAC WiFi RG GPON ONT
- Built-in WAN transceiver, 4 RJ45 GE, 2 RJ11 POTS, 1 BNC RF coax, 2x2 b/g/n (600mW) 3x3 a/n/ac (400mW), 1 USB, UPS, standup table top with wall mount, ships with AC power supply, ZNID RG software.



ZNID-GPON-2424A1

- Indoor HSI Voice RG GPON ONT
- Built-in WAN transceiver, 4 RJ45 GE, 2 RJ11 POTS, 1 USB, UPS, desktop, ships with AC power supply, ZNID RG software
- Optional wall mount, BBU wall mount cradle, desktop dock.



ZNID-GPON-2425A1

- Indoor HSI Voice RF RG GPON ONT
- Built-in WAN transceiver, 4 RJ45 GE, 2 RJ11 POTS, 1 BNC RF coax, 1 USB, UPS, ships with AC power supply, ZNID RG software
- Optional desktop, wall mount.



DZS PREMIUM SERIES OF GPON OLTs

Advantages of GPON Networks: The most obvious advantage of PON networks is that a single shared optical fiber can support multiple users through the use of inexpensive passive optical splitters. In GPON networks, up to 64 ONTs can share one fiber connection to the OLT. This makes Gigabit Passive Optical Network an attractive option for service providers wanting to replace copper networks with fiber, particularly in high-density urban areas.



V-8102

V8102 is a mid-size OLT for small and medium sized networks. It provides connection of up to 4,096 subscribers with 32 GPON ports (split ratio 1:128) with a 2x 320 Gbps non-blocking switch fabric.



V-5816


The compact mini V-5816 GPON OLT provides 16 GPON ports and enables network operators to provide optical fiber-based broadband services in low density areas with a minimum of investment.



V5808

The V5808 is a compact mini GPON OLT providing 8 GPON ports. It enables network operators to provide optical fiber-based broadband services in low density areas with a minimum of investment.

DZS PREMIUM SERIES OF GPON ONTs

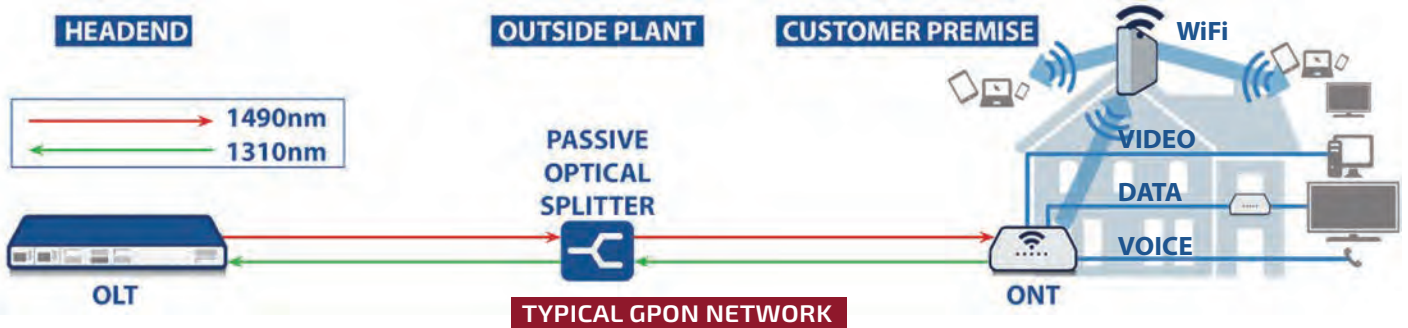

H665

- Supports the ITU-T G.984 standard
- Uplink interface with 2.5 Gbs downstream and 1.25 Gbs upstream
- GbE LAN interfaces
- Supports IGMP snooping for IPTV applications



H662

- Fully ITU-T G.984 compliant framing
- Support Multiple T-CONTs mode
- FEC (Forward Error Correction)
- Support for Multicast GEM Port for IPTV services
- Dying gasp



H660GM

- Supports the ITU-T G.984 standard
- Uplink interface with 2.5 Gbs downstream and 1.25 Gbs upstream
- 4 GbE LAN interfaces
- High-Speed WLAN according to IEEE802.11b/g/n/ac
- Supports IGMP snooping for IPTV applications



H660GW

- ITU-T G.984.x compliant
- 128MB Flash Memory, 128MB SDRAM, USB Interface
- GPON Interface Capacity:
 - Up 1.25Gbps / Down 2.5Gbps
 - Bidirectional Optical Sub Assembly (BOSA) type module Receiving optical sensitivity:
 - Better than -28dBm



MULTICOM GPON OLTs - INTERNATIONAL SERIES - LATAM ONLY



MUL-GPON-OLT-800

Features:

- 8 PON ports in 1RU GPON OLT
- 1 USB interface
- 2 x 10 Gigabit Uplink SFP slots
- 4 Uplink GE Optical SFP ports
- 4 Uplink GE RJ45 copper ports
- 8 GPON SFP Ports for downstream
- Can support 1,024 ONUs with 1:128 Splitter
- Downstream bandwidth of 2.5Gbps
- Upstream bandwidth of 1.25Gbps
- Dual 220VAC or -48VDC redundancy power supplies


MUL-GPON-OLT-1600

Features:

- 16 PON ports in 1RU GPON OLT
- 1 USB interface
- 2 x 10 Gigabit Uplink SFP slots
- 4 Uplink GE Optical SFP ports
- 4 Uplink GE RJ45 copper ports
- 16 GPON SFP Ports for downstream
- Can support 2,048 ONUs with 1:128 Splitter
- Downstream bandwidth of 2.5Gbps
- Upstream bandwidth of 1.25Gbps
- Dual 220VAC or -48VDC redundancy power supplies

Multicom OLTs meet ITU-T G.984/G.988 standards, support OMCI remote management for ONTs & ONUs, are compatible with ITU-T G.984.4/G.988 OMCI Protocol, and incorporate Layer 2 Switching Functioning.

MULTICOM GPON ONTs - INTERNATIONAL SERIES - LATAM ONLY

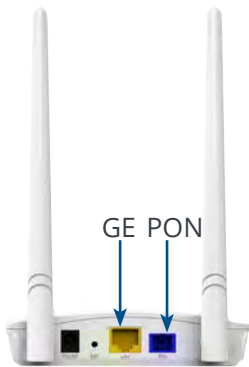


MUL-XPON-ONT100-S-W

The Multicom MUL-XPON-ONT100-S-W, 1GE+WiFi ONT is designed for the FTTH services for cable operators. It meets FTTH, SOHO broadband access, video surveillance and other requirements AND is compatible with both EPON and GPON OLTs for flexible network deployments and future-proofing.

Features:

- Dual Mode - Can be used with GPON & EPON OLTs
- Designed for FTTH services
- Integrated auto-detecting
- Auto configuration capabilities
- WiFi: Dual Antenna with IEEE802.11b/g/n

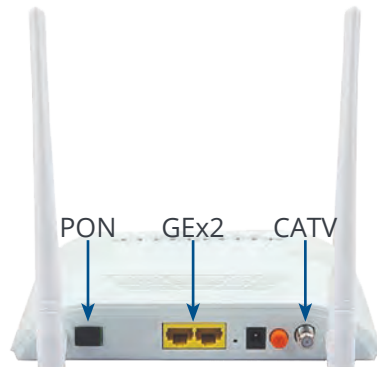


MUL-XPON-ONT200-S-WR

The Multicom MUL-XPON-ONT200-S-WR, 1GE+1FE+WiFi+CATV ONT is designed for the FTTH and triple play services for cable operators. It meets FTTH, SOHO broadband access, video surveillance and other requirements AND is compatible with both EPON and GPON OLTs for flexible network deployments and future-proofing.

Features:

- Dual Mode - Can be used with GPON & EPON OLTs
- Plug and play, integrated auto detecting, auto configuration, and auto firmware upgrade technology
- Full compliance to IEEE 802.3ah specification & OAM function

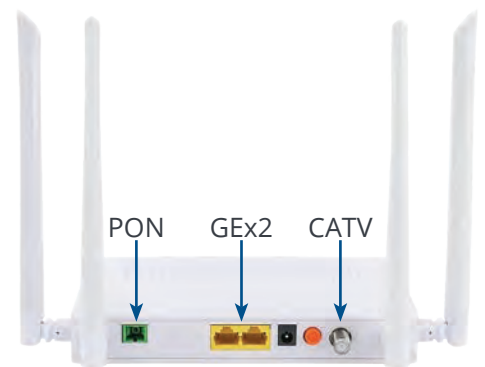

MUL-XPON-ONT200D

The Multicom MUL-GPON-ONT200D, GE+WiFi+USB3.0+CATV GPON/EPON ONT WiFi Mesh terminal is designed for the FTTH and triple play service demands of cable operators. This multi-service Access GPON ONT incorporates Gigabit Ethernet switching, HFC technology, and uses single fiber WDM tech with a downlink wavelength of 1550 & 1490nm, and uplink wavelength of 1310nm.

Features:

- Dual Mode - Can be used with GPON & EPON OLTs
- Dual Range WiFi: 2.4 & 5.0 GHz 4x4 Antennas MIMO up to 1.2Gbps
- 2 x 10/100/1000M Ethernet Ports
- 1 G/EPON Port
- USB 3.0, TX rate 4.8Gbps
- WiFi: Dual Antenna with IEEE802.11b/g/n/ac



MULTICOM EPON OLTs - ECONOMY SERIES - LATAM ONLY



MUL-EPON-OLT-800

Features:

- 8 PON ports in 1RU EPON OLT
- 8 Uplink GE optical SFP ports
- 8 Uplink GE RJ45 copper ports
- 8 EPON ports for downstream
- Can support 512 ONUs with 1:64 Splitter
- Dual 220VAC or -48VDC redundancy power supplies



MUL-EPON-OLT-1600

Features:

- 16 PON ports in 1RU EPON OLT
- 1 USB interface
- 2 x 10 Gigabit uplink SFP slots
- 4 Uplink GE optical SFP ports
- 4 Uplink GE RJ45 copper ports
- 16 EPON Ports for downstream
- Can support 1,024 ONUs with 1:64 Splitter
- Dual 220VAC or -48VDC redundancy power supplies

SFP/SFP+/XFP OPTICAL TRANSCEIVER MODULES



For Use as PON Downlink:

MSFP-EPON-OLT-T-PX20
Use with MUL-EPON-OLT800/OLT1600

MSFP-GPON-OLT-T-C
Use with MUL-GPON-OLT800/OLT1600

Features:

- Industry's smallest 10G form factor for greatest density per chassis
- Hot-swappable input/output device that plugs into an Ethernet SFP port of any compatible switch (no need to power down if installing or replacing)
- Digital optical monitoring capability for strong diagnostic capabilities
- Optical interoperability with 10GBASE XENPAK, 10GBASE X2, and 10GBASE XFP interfaces on the same link

MULTICOM EOC SERIES - ECONOMY SERIES - LATAM ONLY



The Multicom EOC Master is designed to provide broadband Internet service to the subscriber's home through the existing coaxial access network. With XPON (EPON/GPON compatible), EOC and HFC technology, the EOC Master meets the CATV broadcasting, VOD and Internet service requirement of cable operators for FTTB & FTTC.

Features:

- Modular for easy maintenance and upgrades
- 1 XPON (EPON/GPON compatible) ONU module
- 2 HomePlug AV EOC Master modules with 2 masters per module (4 total EOC Masters)
- 1 CATV Optical Receiver module
- Available option with WDM
- RF output configuration with 4 outputs
- Power Module: Line Power (from 90 to 264 VAC) or Cable Line Power (60VAC) optional
- 35/47, 42/54, 65/87 band High/Low Filter options to work in your network

MUL-EOCM400-T

The Multicom MUL-EOCM-400 is an EOC slave A/V solution for Ethernet access over coax. It works together with EOC Master to provide an Ethernet data transmission channel over coax cable, using the existing coax cable networking to enable Ethernet, WiFi, and CATV capabilities.

Features:

- RF Interface:
 - 1 x TV (RF signal) F-connector Output
 - 1 x Cable Input, F-connector
- 4 Ethernet - 10/100M, auto-negotiation
- WiFi
- 12VDC Power Supply



MUL-EOCS-400



16/32 PORT HIGH POWER 1550nm EDFA (WDM OPTION)

The Multicom High Power 1550nm EDFA with built-in CWDM is a low noise high-performance Er Yb co-doped fiber amplifier. Each output includes a built-in CWDM (1310/1490/1550) wavelength division multiplexer. It multiplexes the data stream of the OLT and ONUs to the fiber amplifier output using 1310nm and 1490nm optical connectors. This configuration reduces the equipment and connections needed, improving the system loss budget and reliability. It is ideal for FTTx networks, providing a flexible and low cost solution for the integration of these networks and FTTH.



Perfect for GPON Applications

MUL-EDFA-V-XX-XX (-WDM) - Optional

- Output Power/Port (dBm)
- Output Ports - 8, 12, 16, 32

Multicom also stocks 8/16/32 Port High Power 1550nm Erbium Doped EDFA is a low noise 1550nm optical amplifier designed to amplify 1550nm optical signals to increase the optical transmission distance over fiber, and can be used in conjunction with the Multicom

Multicom stocks a wide variety of 1 & 2RU EDFA configurations, with Output Power from 25 to 37 dBm, and 1, 4, 8, 16 and 32 Output Ports.

NEW! 1.2 GHz DOCSIS 3.1 USA LASERS 1550nm FIBER OPTIC TRANSMITTER



The MUL-1550TX-V-1-X intelligent directly modulated optical transmitter is used in 1550nm optical fiber transmission systems. It uses a U.S. made EMCORE ORTEL DFB laser with an optical output power of up to 10dBm, and advanced intelligent electronic predistortion compensation technology.

Features:

- High linearity, optically isolated, distributed AM feedback EMCORE ORTEL DFB laser with an optical output power of 6dBm
- DOCSIS 3.1
- Transmits NTSC, PAL, ATSC, and related digital information for CATV and/or telephony applications
- 47-1200 MHz RF input bandwidth
- Front panel RF test point
- Automatic Gain Control (AGC) and Manual Gain Control (MGC) override
- Integrated SNMP network interface
- Dual hot-pluggable redundant power supplies

Optical Parameter	Unit	Specification
Optical output power	dBm	6, 7, 8, 9, 10
Optical wavelength	nm	1550 ±10
Laser type		EMCORE ORTEL DFB
Optical modulation type		Direct, Externally Modulated
Frequency range	MHz	47-750/862/1003/1200
RF input level	dBmV	+12 - +28

Multicom stocks a wide variety of Externally and Directly Modulated Transmitters with both 1 & 2 Output Ports, and 6 to 10dBm Output Power.

DID YOU KNOW?

CORNING

Don't Settle for Less than the Highest Quality - We Use Only Corning Fiber in our Fiber Optic Jumpers and Pigtails

MUL-1550TX-V-1-6

- Output Power (dBm) - 6, 7, 8, 9, 10
- Output Port - 1, 2



FIBER OPTIC NETWORK ENCLOSURES

The rugged Multicom Fiber Optic Network Enclosure Series is designed for flexibility and ease of use when splicing in aerial, pole, or wall mount applications. The Enclosure Product Line is constructed of durable and impact resistant materials specifically formulated for reliability and performance in outside plant environments.



Fiber Network Access Points (FNAP)

- Back of FNAP provides for multiple mounting configurations
- Front & rear fiber or splice storage
- Environmental Seal - Heavy duty latches, hinges and gaskets
- Mid-span Access and Cable Glands included
- Sealed secure access lock
- Options: 2 In ports, 8, 12, 16 Out ports

Options:

- LGX Cassette
- Tube PLC Splitter
- Mating Sleeves
- Pigtails

Shown:

M-FNAP-A-B/P-16T-SC/APC



Inline Enclosure

- Capacity: Up to 96 single core or ribbon fibers
- Splice Tray: Up to 6 trays
- Housing Material: High Grade PP/PC, with rubber gasket
- Tray Material: ABS
- Ports: 2 In, 2 Out
- Installation: Aerial, Underground, Wall Mount, Pole Mount

Example Part#:

M-FILC-A-B/P-24-NA



Dome Enclosure

- Capacity: Up to 144 single core or ribbon fibers
- Splice Tray: Up to 12 trays
- Housing Material: High Grade PP/PC, with rubber gasket
- Ports: 1 In, 4 Out
- Installation: Aerial, Pole Mount

Example Part#:

M-FDOME-A-B/P-48-B



FTTH TERMINAL BOX

- Capacity: Up to 4 single core or ribbon fibers
- Applicable: Singlemode or Multi-mode fiber
- Housing Material: ABS
- Ports: 1 In, up to 4 Out
- Installation: Wall

Example Part#:

M-FTERM-B-W/P-1/2B-SC/APC



FIBER OPTIC CABLE

Future-proof fiber optic cable engineered for today's super high-speed and high-performance networks

Easy Cable Entry & Preparation

- 12 fibers per tube construction up to 144 fiber designs allow easy termination and mid-span fiber access
- Flexible buffer tubes enhance mid-entry

Versatile Installation & Use


- Tailored designs span distances
- Easy mid-entry is ideal for FTTH distribution applications

Flexible Routing & Customization

- Flexible buffer tubes simplify routing, storage and prep
- Available in Singlemode & Multi-mode fiber, loose tube

Reliable Lifetime Performance

- Custom engineered for operation under full load
- Guaranteed standards-based performance

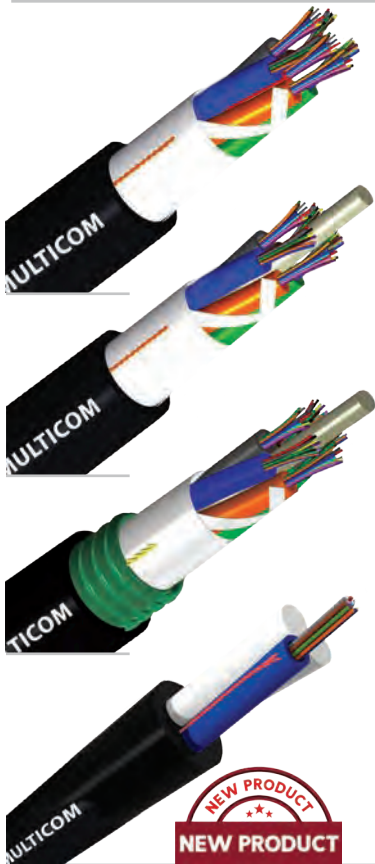

Fiber Optic Cable - Variations to Suit Your Needs

Multicom stocks a warehouse full of Fiber Optic Cable in an endless variety of characteristics. Loose tube gel-free riser cables, indoor & outdoor cables - with UV-resistant, flame-retardant or waterblocking jackets that are rugged, durable and easy to strip. Our cables are designed in singlemode and multi-mode and from 2 to 144 fiber counts, Multicom has the fiber optic cable you need - in stock.

ADSS

Multicom's All-Dielectric Self-Supporting (ADSS) Loose Tube Fiber Optic Cable is the best choice for aerial cable spans. This cable's low-cost installation, compact size and specialized design make it the ideal, cost-effective cabling solution for Fiber-to-the-Home (FTTH) and self-supporting aerial applications.

Armored





Highly durable and reliable for underground and lashed aerial installations as well as general outside plant installations, including direct buried in harsh environments.

Aerial Self-Supported ASU Fiber Optic Cable - Light Wind Load

Multicom's Light Wind Load Aerial Self-Supported ASU Fiber Optic Cable has a loose tube structure and water-resistant gel compound to provide crucial protection for the fiber. Over the tube, water-blocking material is applied to keep the cable watertight. Two parallel fiber reinforced plastic (FRP) elements are placed on the two sides. The cable is covered with a single PE outer sheath. It is especially suitable for installation in aerial for long-distance communication.

Fiber Optic Drop Cable - With / Without Messenger


Multicom's Fiber Optic Drop Cable uses special low-bend-sensitivity fiber B6 (G.657A1), providing greater bandwidth and excellent communication transmission properties. Two parallel strength members (non-metallic FRP), ensures the optical fibers are protected. The low smoke zero halogen (LSZH) flame-retardant jacket allows for safety and environmental protection. The cable is light weight with a flute design which can be easily stripped and spliced, simplifying installation and maintenance. **Multicom's Fiber Optic Drop Cable is available both with and without the Messenger**, which enhances the overall tensile strength of the cable.

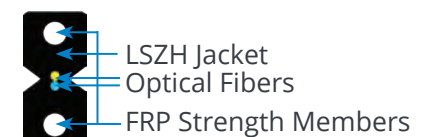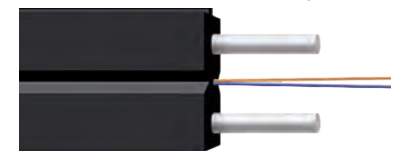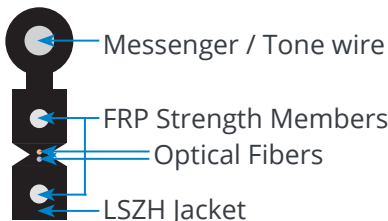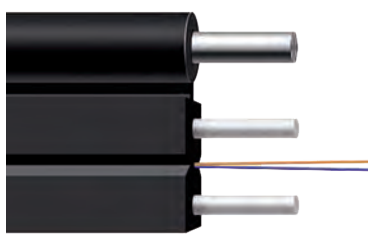

Available in 1 to 6 centrally located optical fibers.



FIBER OPTIC JUMPERS & PIGTAILS

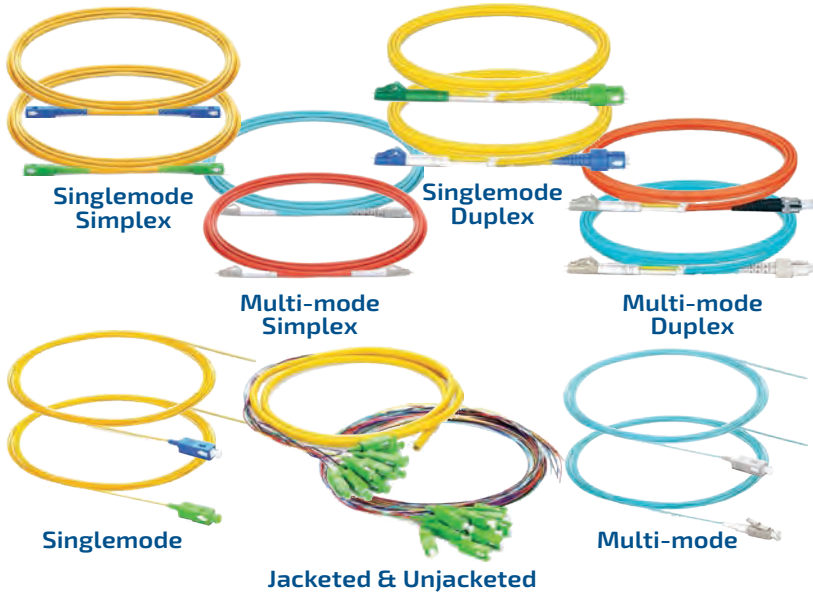

Features:


- Corning fiber used in all jumpers and pigtails
- LSZH Jacket on all fiber varieties
- G.657.A2 Certified
- 2mm jacket for more flexibility and capacity in tight spaces
- Custom lengths and colors
- Meets all standard panel interfaces
- All cables serialized and test results are recorded
- High bandwidth, high tensile strength, small bend radius

DID YOU KNOW?

CORNING

Don't Settle for Less than the Highest Quality - We Use Only Corning Fiber in our Fiber Optic Jumpers and Pigtails

FIBER OPTIC PLC SPLITTERS

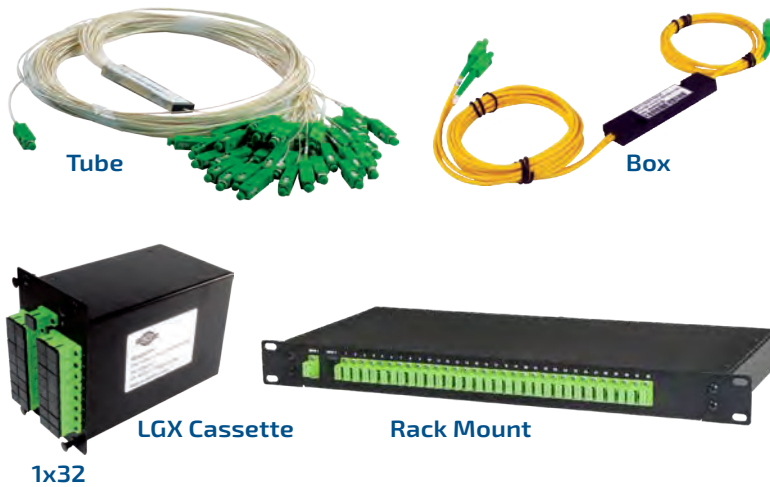

Features:

- Corning fiber
- Low insertion Loss
- Even or various splitting ratios
- 1x2 through 1x64 configurations
- Bidirectional, compact
- Environmentally stable
- Wide wavelength range
- High uniformity
- Telcordia GR-1221-CORE compliant

Applications:

- Long-haul tele/data communications
- Fiber optic equipment and systems
- CATV systems
- Local Area Network, PON, and FTTH

FIELD-INSTALLABLE FIBER OPTIC CONNECTORS



Features:

- No epoxy, fiber polishing, special tools or fusion splicer required
- Quick and easy fiber termination in less than two minutes
- Precision mechanical alignment insures low insertion loss
- Superior optical performance
- Durable components design for convenience and reusability
- Pre-installed fiber in ferrule for on-site assembly
- Uses proven, molded v-groove technologies
- Allow optical continuity to be verified by use of Visual Fault Locator (VFL)

The Multicom Field-installable Fiber Optic Connectors feature a pre-polished ferrule (UPC/APC), that couples to the fiber being terminated by precision mechanical alignment, insuring low loss with a proprietary gel.



WDM



Today's FTTH systems demand innovative products for a variety of applications. The Multicom WDM (Wavelength Division Multiplexor), supports any 2-way RFOG/GPON services operating with a 1550/1490nm Forward Path and 1310/1590/1610nm Return Path - over a single fiber - for seamless integration of video, voice, and data services.


Features:

- Standard LGX form factor
- Mounts in a standard LGX chassis
- Low insertion loss
- Ultra-high isolation
- Wide operating temperature range
- Telcordia GR-1221-Core compliant
- Front-located ports for easy access
- All connectors are SC/APC design for optimal power and reliability


Applications:

The WDM is ideally suited for use in two-way and high density GPON, MDU, CATV, FTTH and RFOG applications, as well as in many other fiber optic-based data, video, and voice networks.

MUL-WDM-F-S-1310/1550-SC/APC



LGX CASSETTE CHASSIS

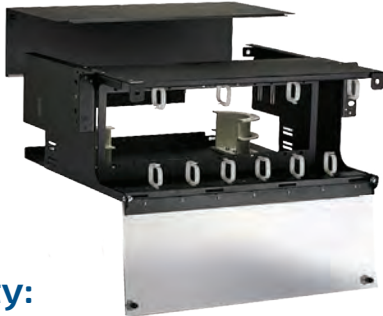

Multicom's Rack-Mounted LGX Cassette Chassis is designed for use with any standard plug-and-play single, double and triple wide LGX 2 to 32 port cassette splitter modules in FTTH networks.

These chassis are designed for use in mid-rise and high-rise Multiple Dwelling Unit (MDU) equipment rooms suited for centralized Optical Network Terminal (ONT) applications.

Capacity:


- 12 - Single wide LGX cassettes
- 6 - Double wide LGX cassettes
- 4 - Triple wide LGX cassettes

Features:

- Complies with all LGX Form Factor Cassette Splitter Modules
- 4 RU
- Transparent dust cover on front hinge

MUL-FOCH-CASS

MATING SLEEVES

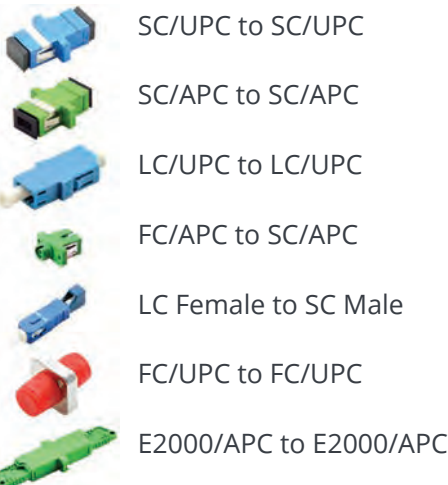


Multicom Fiber Optic Mating Sleeves, also known as Adapters or Couplers, are used to provide a cable to cable or cable to equipment fiber optic connection. We supply a wide range of mating sleeves and hybrid adapters, including special male to female hybrid fiber optic mating sleeves.


Features:

- Used in Singlemode applications
- Free-hanging or panel-mount design
- Dust caps protect against debris and contamination
- RoHS, Telcordia GR-20-CORE, GR-326 and TIA/EIA 568C Compliant

FOMS-XX/YYY-XX/YYY



PATCH & SPLICE ENCLOSURE

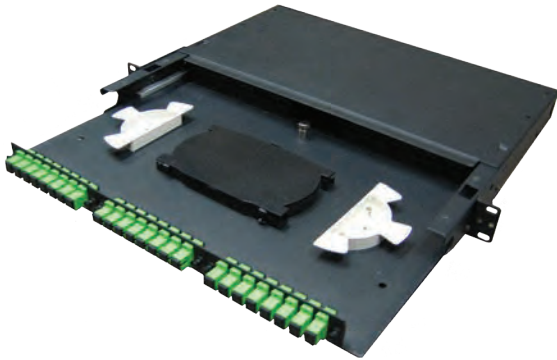

The Multicom 1 RU Patch & Splice Enclosure is designed to accept up to 3 LGX Adapter Panels with the ability to use a full array of connector types. This enclosure offers a flexible solution, enabling the incorporation of a multi-functional chassis that allows easy access during installation or re-work with no disturbance of the existing fiber cable - making this one of the most flexible enclosures on the market.

This Patch & Splice Enclosure can be custom loaded with the exact Adapter Panels and Pigtails needed for your specific application, or the chassis can be purchased empty.

Features:

- Custom loaded to your specific configuration
- 1.5M Pigtails included in loaded enclosures
- Splice tray and cable management spools included
- Hinged front and rear Plexiglass doors
- Side patch and exit ports
- Fully removable sliding-out tray for easy access
- Assorted strain relief and fiber accessories included
- Provides higher patch field density in fewer rack units saving valuable rack space

Parameter	Specification
Suitable for module type	LGX Adapter Panels
Number of Adapter Panel positions	3 - can be simplex or duplex
Material	16 gauge, cold-rolled steel
Material finish	Black, powder coated


MUL-RM-XF-PS

Chassis only

MUL-RM-8F-PS-SC/APC-S

- S = Simplex, D = Duplex
- F/O Connector Type
- PS = Patch and Splice, PO = Patch Only
- xF - x = Number of Fibers
- RM = Rack Mount, WM = Wall Mount

ADAPTER PANELS

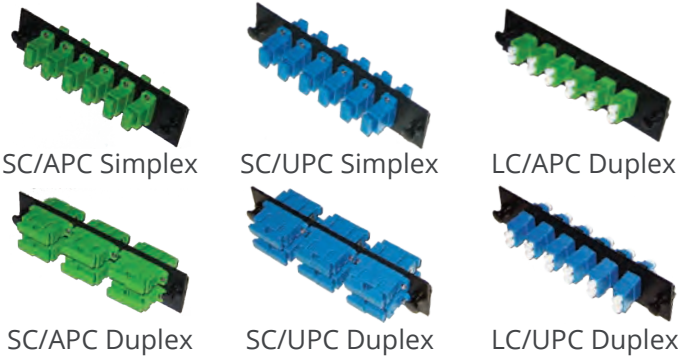

Multicom's Fiber Optic Adapter Panels are compatible with all LGX style rack and wall fiber distribution units. Panels are available in Simplex and Duplex adapter formats.

Features:

- LGX form factor compatible with Multilink, AFL, Wirewerks, FIS, and other rack and wall fiber distribution units
- RoHS Compliant
- Loaded with TIA/EIA-604 FOCIS-3/10 compliant adapters
- Built with ceramic split sleeves to fit specific network requirements
- 18-gauge cold rolled, electrostatic polyester powder coated steel
- All panels are pre-loaded for quick deployment

FOAP-6-SM-SC/APC

- Connector Type
- SM = Singlemode, MM = Multi-mode
- Number of Adapters (6, 8)

ATTENUATORS

Fixed-value Attenuators reduce the signal level without appreciably distorting the waveform. Available in 1dB increments. All connector types available.



FOATT-XX/XXX-XDB

- Decibels (dB)
- Connector Type

FIBER OPTIC FUSION SPLICER KIT



The tough and rugged Multicom MUL-FSPLICE-300 Core-to-Core Alignment Fiber Optic Fusion Splicer is drop/impact, dirt/dust and water resistant. Multicom is proud to provide a Year International Warranty, and all USA Service and Support.

The Fusion Splicer employs high-speed image processing and special positioning technology allowing the fusion splicing to be completed in as little as a FAST 7 seconds and can heat shrink in as little as an ULTRA-FAST 9 seconds. The splicer is compact in size, lightweight, and is ideal to work just about anywhere including harsh outdoor environments, dark and remote worksites.

MUL-FSPLICE-300

Features:

- FAST 7 Second Splicing (optional)
- ULTRA-FAST 9 Second Heat Shrinking (optional)
- Drop/Impact, Dirt/Dust and Water Resistant
- 1 Year International Warranty
- Quick-change Rechargeable Lithium Battery
- State-of-the-Art Core-to-Core fiber Profile Alignment System (PAS)
- German Design, USA & Japanese Technology
- Titanium Alloy Body/Frame
- High Performance Processor Board
- 5-direction Anti-shock
- 6 Motor Precision Mechanism
- Fully-automatic, semi-automatic and manual operating modes
- Automatic detection of fiber cleaved face quality
- Automatic display of cleaved fiber and the offset angles
- Automatic analysis and estimation of splice loss
- Automatic detection of bad/faulty splice
- Automatic detailed data report record and memory storage for each splice (up to 10,000 splices)
- Automated 2N splice tension test
- Handy, easy-to-carry, solid and durable with shock-resistant design Enhanced windproof fusion area cover
- Color HD 5" LCD display and graphical interface
- English, Spanish and French languages, user-selectable
- Single X or Y view, or X and Y simultaneously
- Up to 400x magnification
- High quality electrodes with up to 3,500+ splicing cycles
- Easy user-replaceable electrodes design (set of spares is included)
- Wide range of fusion and heating parameter defaults and options
- Built-in temperature, humidity, air pressure sensors and automatic arc correction
- Intelligent power indicator, auto power-off and quick-change battery
- Built-in heat shrink heater: Easy to use, quick, customizable parameters
- Data reports can be downloaded to PC and system upgrades can be uploaded via USB port and cable
- Built-in work lights make optical-fiber placement easier and more accurate, even at night or in dark work areas

The MUL-FSPLICE-300 Kit includes:



MINI OPTICAL TIME DOMAIN REFLECTOMETER (OTDR)

The MUL-OTDR-500 is a handheld Optical Time Domain Reflectometer (OTDR) with an ergonomic design that uses the latest technology in the optic fiber field. The Multicom OTDR provides outstanding functionality and durability with high precision, high sensitivity, easy operation and very light weight.

The MUL-OTDR-500 includes multiple functions all in one instrument making it the ultimate tool for fiber network construction and maintenance. The Multicom OTDR is perfect for technicians working with FTTH testing in PON networks, CATV and access network testing, and fiber system troubleshooting. The OTDR function supports real, average, and auto mode test with 1310 & 1550nm wavelengths, while allowing the user to save the results in an SOR file format. There is also an event map function to show the length and information for each link in the system.




NEW PRODUCT
NEW PRODUCT

The MUL-OTDR-500 Comes Equipped with:

- **Optical Power Meter (OPM):** -50dBm to +26dBm range for 850, 980, 1300, 1310, 1490, 1550 & 1625nm wavelengths
- **Visual Fault Locator (VFL):** 10mW output power to help the user visually find fiber faults like breaks & bad splices
- **Optical Light Source (OLS):** 1310 & 1550nm wavelengths with CW, 270 & 330 Hz, 1 & 2 kHz modulation frequencies
- RJ-45 cable line sequence measurement, line length, and wire/cable tracing/tracking MUL-OTDR-500-WT Receiver
- LED Flashlight to help technicians in locations with low lighting conditions

The MUL-OTDR-500 Kit Includes:

- MUL-OTDR-500
- MUL-OTDR-500-WT - Wire Tracker
- SC Adapter (pre-installed on OTDR)
- ST Adapter
- Protective case
- USB charging cable
- USB flash drive
- Cleaning Alcohol Wipes
- AC/DC USB charging adapter
- 2x AAA batteries
- Calibration Certificate

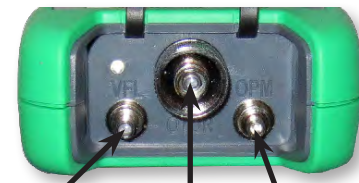

VFL Adapter Port OTDR Adapter Port OPM Adapter Port

MUL-OTDR-500

OPTICAL TIME DOMAIN REFLECTOMETER (OTDR)



Features:

- Auto/manual testing
- Integrated design with long battery life
- Outdoor enhanced, smart and rugged
- 7" anti-reflection LCD touch screen
- Support multi-language display and input
- Visual Fault Locator (VFL)
- The MUL-OTDR-1100 includes Light Source, Power Meter & Smart Network Analysis

The hand-held Optical Time Domain Reflectometer MUL-OTDR-1000 and MUL-OTDR-1100 are a new generation of intelligent optical-fiber test equipment. Multicom's OTDRs are specially designed for tough outdoor jobs. Lightweight, easy operation, low-reflection LCD and 12 hours of battery life make it perfect for testing fiber optic cable in the field.

MUL-OTDR-1000
MUL-OTDR-1100

OTDR FIBER OPTIC MICROSCOPE PROBE



Features:

- Fine focus control for easy inspection of any fiber connector
- 5 interchangeable precision stainless-steel adapters
- USB connection to an OTDR or PC/laptop to display, capture and record the fiber end-faces

MUL-FVSCOPE-400




PON OPTICAL POWER METER WITH VISUAL FAULT LOCATOR

3-in-1 PON Optical Power Meter:

- PON Power Meter - Test between OLT and ONT
- Optical Power Meter - Test Six Wavelengths
- 10mW Visual Fault Locator

The Multicom MUL-OPM-PON-VFL-300 PON Optical Power Meter is connected between the OLT and ONT, and is especially designed for PON network construction and maintenance. The voice, data, video signal (1310nm/1490nm/1550nm), can be measured synchronously and the corresponding optical power value can be displayed with this meter. The meter is also capable of measuring and storing test results for downloading to a PC.



Features:

- Tests 3 PON wavelengths synchronously: 1490nm, 1550nm & 1310nm, and stores the results for downloading
- Power Meter is capable of testing 850, 1300, 1310, 1490, 1550 & 1625nm
- 10mW Visual Fault Locator
- Tests the burst mode RfOG upstream wavelength signal of 1310nm
- Handheld, easy to operate
- Save and upload 1,000 records through USB to management software
- 3.7V, 6600mAh rechargeable Lithium battery

MUL-OPM-PON-VFL-300

OPTICAL POWER METER



Features:

- For use with 850, 980, 1300, 1310, 1490, 1550nm
- Simultaneously display of Absolute & Relative power
- SC, FC, 2.5mm Universal Connector
- 200 hours of operation (typical)
- Standard AA alkaline batteries (provided)
- Rugged and weather resistant

MUL-OPM-100

XGPON OPTICAL POWER METER WITH VISUAL FAULT LOCATOR

4-in-1 XGPON Optical Power Meter:

- XGPON & PON Power Meter - Test between OLT and ONT
- Optical Power Meter - Test Six Wavelengths
- 10mW Visual Fault Locator
- Video Fiber Inspection Module with optional Video Inspection Microscope (MUL-FVSCOPE-400)

The Multicom MUL-OPM-XGPON-VFL-400 XGPON Optical Power Meter is connected between the OLT and ONT, and is especially designed for XGPON network construction and maintenance. The voice, data, video signal (1270/1310/1490/1550/1577nm), can be measured synchronously and the corresponding optical power value can be displayed with this meter. The meter is also capable of measuring and storing test results for downloading to a PC.



Features:

- Tests 5 XGPON wavelengths synchronously: 1270, 1310, 1490, 1550, & 1577nm, and stores the results for downloading
- Capability of end face fiber inspection with optional video fiber inspection microscope
- Power Meter is capable of testing 850, 1300, 1310, 1490, 1550 & 1625nm
- 10mW Visual Fault Locator
- Tests the burst mode RfOG upstream wavelength signal of 1310nm

MUL-OPM-XGPON-VFL-400



OPTICAL LIGHT SOURCE



Features:

- High stability of the output power and stable output wavelength
- Supports 2 or 4 output wavelengths
- MUL-OLS-100 - Singlemode - 1310/1550nm
- MUL-OLS-200 - Multi-mode - 850/1300nm
- MUL-OLS-300 - Singlemode & Multi-mode - 850/1300 & 1310/1550nm

MUL-OLS-100/200/300



OPTICAL FIBER IDENTIFIER



Features:

- Indicates the signal direction and power in optical fiber
- Indicates signal presence or absence (live or dark fiber)
- Efficiently identifies the traffic direction and frequency tone (270Hz, 1KHz, 2KHz) with audible warning
- Built in VFL function

VISUAL FAULT LOCATOR

Features:

- Bright red laser at 650 ±10nm
- Continuous Wave (CW)/Off/Pulse operation
- Batteries last 50 hours (typical)
- Standard AAA alkaline batteries
- Rugged and weatherproof
- 2.5mm universal connector
- Available in 1, 10, 20, 30 and 50mW




MUL-VFL-10MW

mW: 1, 10, 20, 30, 50

HIGH PRECISION FIBER OPTIC CLEAVERS



MUL-FO-CLEAV-200



MUL-FO-CLEAV-150



MUL-FO-CLEAV-100

Features:

- Compact body and high precision design
- Applicable for single fiber and up to 12-count fiber ribbon (-200 only)
- For use on Singlemode and Multi-mode fiber
- 36,000+ fiber cleaves life (1,000 cleaves x 3 heights (-200 only) x 12/16 positions)
- Includes hard carrying case and additional accessories

HANDHELD FIBER INSPECTION MICROSCOPE



Focal Adjustment Dial



Features:

- Portable and easy to use, ideal for field use
- 400X magnification
- For inspection of singlemode and multi-mode fibers
- Optical Connector: 1.25 & 2.5mm universal adapter
- Color: Black
- Power Supply: 3 x AAA batteries
- Battery Life: 40 hours
- Specialized eyepiece design

MUL-FSCOPE-400

OTDR LAUNCH CABLE BOX



Features:

- Ruggedized Case
- Singlemode
- 150 Meters / 500 Meters / 1 KM
- SC/UPC to SC/UPC Connectors (others available on request)
- Robust carabiner clip
- Built-in cable management
- Compound latch with locking feature

MUL-OTDR-LCB



PREMIUM PATCH & SPLICE ENCLOSURES



Provide Higher Patch Field Density in Fewer Rack Units Saving Valuable Rack Space

Optical fiber enclosures provide cross- and interconnections in fiber optic cabling systems between optical fiber distribution cables, connecting hardware and active equipment, and for mechanical protection of these connections.

Multicom's industrial grade Premium Patch & Splice Enclosures provide professional cable management and easy fiber termination availability using a ball bearing telescopic rail structure. The internal tray is installed on telescopic rails to provide easy access to the internal fiber tray and ports.

Features:

- Available in 1, 2, and 4 RU configurations
- Telescopic ball bearing rail system easily allows the entire assembly to slide out for easy access to internal hardware and splice fibers
- Easy installation and access
- Fiber guidance tubes to protect and direct the fiber cables to the splice cassettes
- 35mm fiber bending bracket control
- Compliant with all types of adapters
- Splice tray, cable management, and all mounting and fiber accessories included
- Provides higher patch field density in fewer rack units saving valuable rack space
- Standard connectors and optional premium angled connectors for minimal cable bending inside the enclosure


Parameter	Specification		
Rack Units	1RU	2RU	3RU
Capacity Ports	12 / 24	24 / 48	48 / 72
Max Ports	48	48	144
Dimensions	19" (48.26cm)		
Material	Carbon steel		
Weight	7.7lbs (3.5Kgs)	8.8lbs (4Kgs)	13.6lbs (6.2Kgs)



Compliance:

- ISO 9001
- ROHS
- TELCORDIA GR-326-CORE
- TELCORDIA GR-449
- IEC 61300-3-4
- IEC 61300-3-6
- TIA/EIA 598-C

MUL-PS-DLXA-S-XXF-S-XX/XXX-LDX

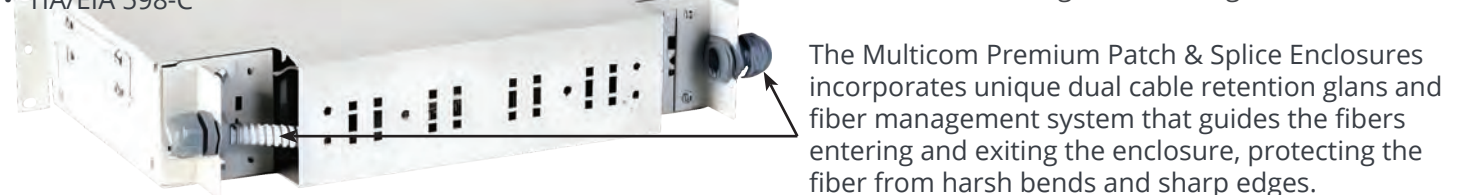

HIGH-POWER MICRO-NODE



Features:

- Uses an advanced optical AGC circuit design, with an optical AGC control range of: +2dBm ~ -9/-8/-7/-6/-5/-4dBm adjustable
- Features the high quality, high reliability DFB laser
- Forward operating frequency up to 1GHz, RF amplifier uses a high performance low power consumption GaAs amplifier, maximum output level up to 52dBmV
- EQ and ATT both use an advanced electric control circuit for setting the operating parameters, making the setup easier and more accurate
- Internal power supply

The MUL-MN-V-TR-HP-AC optical receiver is a bi-directional receiver specifically developed for HFC broadband networks. It accommodates the FTTH network topology, while addressing the issues of CATV bidirectional return channel noise and the high reliability network security transmission requirements of modern CATV networks.

Forward Optical Receiver Parameters	Unit	Technical Parameter
Optical Receiving Power	dBm	-9 ~ +2
Optical AGC Range	dBm	+2 ~ -9/-8/-7/-6/-5/-4 (adjustable)
Optical Return Loss	dB	> 45
Optical Receiving Wavelength	nm	1260 ~ 1620
Optical Connector Type		SC/APC
Fiber Type		Single Mode
Link Performance		
C/N, C/CTB, C/CSO	dB	≥ 51, ≥ 60, ≥ 60
RF Parameters		
Frequency Range	MHz	54 ~ 1000
Flatness in Band	dB	± 0.75
Test Port	dB	-20
Rated Output Level	dBmV	≥ 108 dBμV (≥ +48 dBmV)
Max Output Level	dBmV	+49 (≥ 109 dBμV) (when input optical power -9 ~ +2dBm) +52 (≥ 112 dBμV) (when input optical power -7 ~ +2dBm)
Output Return Loss	dB	≥ 16
Output Impedance	Ω	75
Electrical Control EQ Range, ATT Range	dB	0 ~ 15
Return Optical Transmitter Parameters		
Optical Transmit Wavelength	nm	1310 ±10
Laser Type		DFB
Optical Output Power	mW	1 ± 0.5
Optical Connector Type		SC/APC
RF Parameters		
Frequency Range	MHz	5 ~ 42
Flatness in Band	dB	±1
Input Level	dBmV	+15 ~ +25 (75 ~ 85 dBμV)
Output Impedance	Ω	75
NPR Dynamic Range	dB	≥15 (NPR ≥30 dB) Using DFB Laser

MUL-MN-V-TR-HP-AC

└─ TR = Transmit and Receive. R = Receive Only



NEW! RFOG MICRO-NODE



Features:

- The laser control circuit uses advanced circuit design, insuring reliable and stable operation
- Provides excellent AGC characteristics, when the input optical power range is within -7 ~ +2dBm, the RF output level remains unchanged, CTB and CSO basically remain unchanged
- High quality and efficient RF attenuator circuit with excellent linear attenuation and high precision
- GaAs amplifier device, with good index, low distortion, and high reliability

The Multicom MUL-MN-V-RFOG-1310/1610 RFOG Optical Network Unit is bi-directional and specially developed for HFC broadband networks while accommodating all FTTH (Fiber to the Home) network topologies. This RFOG Micro-Node addresses the issues of return channel noise and high reliability network security transmission requirements of modern CATV networks.

Forward Optical Receiver	Unit	Specification
Optical Receiving Power	dBm	-7 ~ +2
Optical Return Loss	dB	>45
Optical Receiving Wavelength	nm	1100 ~ 1600
Forward RF Parameters		
Frequency Range	MHz	54 ~ 1003
Flatness in Band	dB	±0.75
Rated Output Level	dBmV	≥32
Output Return Loss	dB	≥16

Return Optical Transmitter	Unit	Specification
Optical Transmit Wavelength	nm	1310 ±10, 1610 ±10
Optical Output Power	mW	0.5 ~ 2
Laser		DFB
Optical Connector Type		SC/APC
Return RF Parameters		
Frequency Range	MHz	5 ~ 42
Flatness in Band	dB	±0.75
Input Level	dBmV	+15 ~ +25
Input Return Loss	dB	≥16

MUL-MN-V-RFOG-XXXX — Upstream Wavelength - 1310nm, 1610nm

NEW! MICRO-NODE



The MUL-MN-V-TR optical node was specially developed for HFC broadband networks, accommodates FTTH (Fiber to the Home) network topology, and while addressing the issues of return channel noise and high reliability network security transmission requirements of modern CATV networks.

Features:

- The laser control circuit uses advanced circuit design, insuring reliable and stable operation
- Provides excellent AGC characteristics, when the input optical power range is within -7 ~ +2dBm, the RF output level remains unchanged, CTB and CSO basically remain unchanged
- High quality and efficient RF attenuator circuit with excellent linear attenuation and high precision
- GaAs amplifier device, with good index, low distortion, and high reliability

Forward Optical Receiver	Unit	Specification
Optical Receiving Power	dBm	-7 ~ +2
Optical Return Loss	dB	> 45
Optical Receiving Wavelength	nm	1260 ~ 1620
Forward RF Parameters		
Frequency Range	MHz	54 ~ 1000
Flatness in Band	dB	± 0.75
Rated Output Level	dBmV	≥ +32
Output Return Loss	dB	≥ 16
Return Optical Transmitter	Unit	Specification
Optical Transmit Wavelength	nm	1310 ±10
Laser Type		FP
Optical Output Power	mW	1 ± 0.5
Return RF Parameters		
Frequency Range	MHz	5 ~ 42
Flatness in Band	dB	±0.75
Input Level	dBmV	+15 ~ +25

MUL-MN-V-TR



NEW!

MICRO-NODE WITH PON PASS THROUGH



The MUL-MN-V-RPON Fiber Optic Micro-Node with PON Pass Through provides PON/GPON/XPON bidirectional passthrough while providing RF/CATV receiving functionality. It has been specially designed for HFC broadband networks, accommodating FTTH (Fiber to the Home) network topology.

Features:

- PON/GPON/XPON bidirectional passthrough
- Optical receiving power up to 0dBm
- Output can be adjusted manually
- GaAs amplification
- Three-color status LED shows optical power receiving status
- Efficient power consumption <3W

Optical Parameter	Specification
Optical receiving power (dBm)	-10 ~ 0
Return loss (dB)	>45
Optical Receiving Wavelength (nm)	1100 ~ 1600 or 1530 ~ 1620
Optical interface	Input: SC/APC, PON: SC/UPC
Optical type	Singlemode
Link Performance	
C/N (dB)	≥46
C/CTB (dB)	≥62
C/CSO (dB)	≥62
	@ Pin = -6dBm
RF Parameter	
Frequency Range (MHz)	45 ~ 1003
Flatness in band (dB)	±0.75
Output level (dBmV)	18
Output return loss (dB)	≥14
Output impedance (Ohm)	75
Consumption (W)	<3
Operating temperature	-4 ~ 131°F (-20 ~ +55°C)
Dimensions (LxWxH)	4.3"x 3.1" x 1" (109 x 80 x 26mm)
Optical power indicators	Green: Optical input power high ≥-6dBm Yellow: Optical input power -6 ~ 10dBm Red: Optical input low <-10dBm

MUL-MN-V-R-PON

NEW!

MICRO-NODE RECEIVERS



MUL-MN-V-R



MUL-MN-T-R

Features:

- Receive only
- Mini-size, easy to install
- Operating frequency up to 1GHz
- RF amplifier uses a high performance low power consumption GaAs amplifier
- 12VDC power supply

The Multicom Optical Micro-Node Receivers are equipment that was specially developed for HFC broadband networks, accommodating FTTH (Fiber to the Home) network topology.

Optical Parameters	Specification
Optical Receiving Power (dBm)	-15 ~ +2
AGC Range (dBm)	-7 ~ +2
Optical Return Loss (dB)	> 45
Optical Receiving Wavelength (nm)	1100 ~ 1600
RF Parameters	
Frequency Range (MHz)	45 ~ 1003
Flatness in Band (dB)	± 0.75
Rated Output Level (dBmV)	≥ +28 (≤88 dBμV)
Output Return Loss (dB)	≥ 16

MUL-MN-V-R

Optical Parameter	Specification
Optical Receiving Power (dBm)	-18~+3 (-15~+2 optimal)
AGC Range(dBm)	-8~+2
Optical Return Loss (dB)	> 45
Optical Receiving Wavelength (nm)	1100~1600
RF Parameter	
Frequency Range (MHz)	47~1000
Flatness in Band (dB)	≤ ±1.5
Rated Output Level (dBmV)	≥20±1
Output Return Loss (dB)	≥14

MUL-MN-T-R



NEW!

QUICKWISE & QUICKSPICE FOR MESSENGER

The Multicom **QUICKWISE** is used to deadend galvanized steel messenger mid-span of a service drop. The QuickVise is designed to support both ends of self supporting multi-pair drop wire that uses a solid galvanized steel messenger wire.

Features:

- Rated to hold a minimum of 90% of Rated Breaking Strength (RBS) of the messenger wire
- Recommended for use with coaxial cable with messenger wire
- Used for deadend or mid-span applications
- Also known as an Automatic Deadend




QUICKWISE MESSENGER QUICKSPICE MESSENGER

The double-sided Multicom **QUICKSPICE** is used to splice galvanized steel messenger mid-span of a service drop. It will also support both ends of self supporting messenger wire that is integrated into the jacket in a figure 8 configuration.

Features:

- Rated to hold a minimum of 90% of Rated Breaking Strength (RBS) of the messenger wire
- Recommended for use with RG-11, RG-6 and .500 coaxial cable with messenger wire

MUL-QUICKWISE-STRAND-XXX



Part Number	Wire Range		Tensile Strength	
	Inches	MM	Kgs	Lbs
MUL-QUICKWISE-043	0.043-0.059	1.1-1.5	300	660
MUL-QUICKWISE-062	0.055-0.078	1.3-1.9	400	880
MUL-QUICKWISE-094	0.071-0.100	1.8-2.5	700	1545
MUL-QUICKWISE-109	0.102-0.114	2.3-3.0	700	1545
MUL-QUICKWISE-125	0.102-0.125	2.6-3.2	700	1545
MUL-QUICKSPICE-043	0.043-0.059	1.1-1.5	300	660
MUL-QUICKSPICE-062	0.055-0.078	1.3-1.9	400	880
MUL-QUICKSPICE-094	0.071-0.100	1.8-2.5	700	1545
MUL-QUICKSPICE-109	0.102-0.114	2.3-3.0	700	1545
MUL-QUICKSPICE-125	0.102-0.125	2.6-3.2	700	1545

NEW!

QUICKWISE & QUICKSPICE FOR STRAND

The Multicom **QUICKWISE** for STRAND WIRE is for deadend applications with down guy wire, not for overhead strand.

Features:

- Rated to hold a minimum of 90% of Rated Breaking Strength (RBS) of the strand wire
- Recommended for use with common grade, high strength utility grade, aluminized and galvanized steel strand
- Used for deadend or mid-span applications

Features:

The double-sided Multicom **QUICK SPLICE** for STRAND WIRE is used for splicing applications with down guy wire.

- Rated to hold a minimum of 90% of Rated Breaking Strength (RBS) of the strand wire
- Recommended for use with common grade, high strength utility grade, aluminized and galvanized steel strand



QUICKWISE STRAND

QUICKSPICE STRAND

Part Number	Typical Strand Cable Size	Bail Dia. (mm)	Dimensions (mm)			Wire Range		Tensile Strength		Weight (g)
			X	Y	Z	inches	mm	kgs	lbs	
MUL-QUICKWISE-STRAND-187	3/16"	4.1	244	121	20.5	.138-.217	3.5-5.5	2000	4400	166
MUL-QUICKWISE-STRAND-250	1/4"	5.2	233	101	26	.240-.272	6.1-6.9	2700	6000	162
MUL-QUICKWISE-STRAND-312	5/16"	6.8	234	113	37.2	.307-.343	7.8-8.7	4500	10080	305
MUL-QUICKWISE-STRAND-375	3/8"	8	294	132	42	.360-.378	9.1-9.6	6300	13860	481
MUL-QUICKWISE-STRAND-437	7/16"	10	375	170	54	.413-.449	10.5-11.4	8600	18720	874
MUL-QUICKSPICE-STRAND-187	3/16"	-	197	26	-	.138-.217	3.5-5.5	2000	4400	183
MUL-QUICKSPICE-STRAND-250	1/4"	-	163	23.2	-	.240-.272	6.1-6.9	2700	6000	132
MUL-QUICKSPICE-STRAND-312	5/16"	-	187	28.1	-	.307-.343	7.8-8.7	4500	10080	237
MUL-QUICKSPICE-STRAND-375	3/8"	-	210	32.8	-	.360-.378	9.1-9.6	6300	13860	354
MUL-QUICKSPICE-STRAND-437	7/16"	-	275	40.5	-	.413-.449	10.5-11.4	8600	18720	670



NEW!

FORMED WIRE DEAD-END FOR ADSS



The Multicom Formed Wire Dead-end is a dielectric Dead-end designed to terminate short span, low tension ADSS fiber optic cables in low voltage environments.

This Dead-end is a single component that offers an economical solution for very light loads. The product effectively transfers the low axial load on the cable at the end of the Dead-end legs to low uniform radial compression near the Dead-end loop.


Features:

- Standard design parameters
- Broad cable OD ranges, listed on ID tags
- Economical single component design
- Optimized compact length
- Fast easy installation
- Accepts standard pole line fittings
- Latex coated with flared ends
- Uniform pressure design
- Superior fatigue strength wire design

Part Number	Supported Round Cable Diameters		Length		Color Code Marking
	Max / Min (inch)	Max / Min (mm)	Inch	M	
MUL-ADSSDE-8.9/9.1	0.351 / 0.36	8.9 / 9.1	24	0.61	Black
MUL-ADSSDE-9.5/10.5	0.375 / 0.414	9.5 / 10.5	28	0.71	Red
MUL-ADSSDE-10.6/11.6	0.415 / 0.459	10.6 / 11.6	31	0.79	Orange
MUL-ADSSDE-11.7/12.8	0.46 / 0.505	11.7 / 12.8	33	.084	Green
MUL-ADSSDE-12.9/14.1	0.507 / 0.555	12.9 / 14.1	37	0.94	Pink
MUL-ADSSDE-14.2/15.6	0.559 / 0.614	14.2 / 15.6	42	1.07	Yellow
MUL-ADSSDE-15.7/17.3	0.616 / 0.68	5.7 / 17.3	45	1.14	Blue
MUL-ADSSDE-17.4/19.1	0.685 / 0.751	17.4 / 19.1	49	1.24	Brown

NEW!

GUY WIRE DEAD-END FOR STRAND

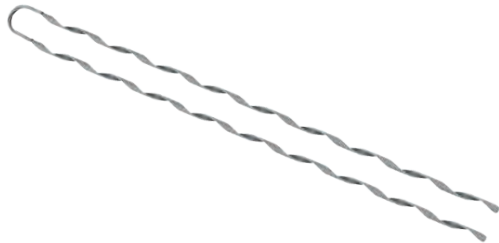

The Multicom Guy Wire Dead-end is made of galvanized steel wire with B class Coating for use with high strength Class A strands. The Dead-end is made with the same material as the strand to which it will be applied.

Can be used to retain, anchor and connect the end of a steel cable for Telecomm, CATV and Energy Industries. Use with down guy wire, not for overhead strands.

Features:

- Color Coded to easily identify the part needed for each job
- Cross Over marks to indicate the starting point for small and large diameter fittings
- Identification Tag Catalog Number & Guy size
- Offset Tips for easy application of the strand start with the short leg

Part Number	Strand			Diameter (Inches)	Length (Inches)	Color Code
	Size	Construction	Weight (Lbs)			
MUL-GWDE-3/16	3/16	4W	0.176	0.070	20	Red
MUL-GWDE-7/32	7/32	5W	0.265	0.070	24	Green
MUL-GWDE-1/4	1/4	5W	0.463	0.086	25	Yellow
MUL-GWDE-9/32	9/32	5W	0.683	0.086	28	Blue
MUL-GWDE-5/16	5/16	5W	0.772	0.100	31	Black
MUL-GWDE-3/8	3/8	5W	1.213	0.119	35	Orange
MUL-GWDE-7/16	7/16	5W	1.940	0.138	38	Green



NEW!

PLASTIC SUSPENSION CLAMP FOR ADSS

The Multicom MUL-FOSCLAMP-ADSS1 is a high quality UV resistant High-Strength Plastic Clamp to support ADSS cable on the pole. The design of this clamp makes installation fast and easy while providing bolt and strap mounting options. Ideal for use with short spans.



Features:

- Made from UV resistant, high-strength plastic
- UV resistant neoprene sleeve inserts
- Small, compact design
- Includes stainless steel bolt and locking washer to lock the clamp
- No special tools needed

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-FOSCLAMP-ADSS1-.315/.394	0.315/8.00	0.394/10.00
MUL-FOSCLAMP-ADSS1-.394/.433	0.394/10.00	0.433/11.00
MUL-FOSCLAMP-ADSS1-.433/.512	0.433/11.00	0.512/13.00
MUL-FOSCLAMP-ADSS1-.512/.591	0.512/13.00	0.591/15.00
MUL-FOSCLAMP-ADSS1-.591/.669	0.591/15.00	0.669/17.00
MUL-FOSCLAMP-ADSS1-.669/.748	0.669/17.00	0.748/19.00

NEW!

ALUMINUM SUSPENSION CLAMP FOR ADSS

The high-quality Multicom MUL-FOSCLAMP-ADSS2 aluminum Suspension Clamp is used to gently, but firmly support ADSS fiber securely onto the side of a pole or vertical surface. The special design includes an integrated bolt or band mount design, hinged keeper and base with single-bolt clamping, making installation fast and easy while providing several mounting options to choose from.



Features:

- Base is connected by a rear hinge to provide quick and easy installation of ADSS cable
- Cushion Inserts made of UV resistant neoprene sleeve insert to gently hold the ADSS cable in place
- Includes stainless steel bolt and locking washer to lock the clamp

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-FOSCLAMP-ADSS2-.356/.460	0.356/9.05	0.460/11.68
MUL-FOSCLAMP-ADSS2-.459/.555	0.459/11.66	0.555/14.10
MUL-FOSCLAMP-ADSS2-.551/.650	0.551/14.00	0.650/16.50
MUL-FOSCLAMP-ADSS2-.650/.748	0.650/16.50	0.748/19.00

NEW!

HEAVY DUTY SUSPENSION CLAMP FOR ADSS

The heavy-duty Multicom MUL-FOSCLAMP-ADSS3 suspension clamp is a versatile, and reliable solution for securing and suspending ADSS cable up to 150 meters. The versatility of the clamp allows the installer to either fix the clamp to the pole using a through bolt or band.



Features:

- Galvanized steel clamp
- UV resistant neoprene sleeve insert
- For suspension spans up to 150 meters
- Versatile with multiple installation options
- No special tools needed

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-FOSCLAMP-ADSS3-.394/.591	0.394/10.00	0.591/15.00
MUL-FOSCLAMP-ADSS3-.591/.787	0.591/15.00	0.787/20.00



NEW!

MINI-SUSPENSION CLAMP FOR ADSS

The heavy-duty Multicom MUL-FOSCLAMP-ADSS4 mini-suspension clamp is a versatile, and reliable solution for securing and suspending short and medium span ADSS cable. The versatility of the clamp allows the installer to either fix the clamp to the pole using a through bolt or band.



Features:


- Aluminum clamp
- UV resistant neoprene sleeve insert
- For suspension spans up to 150 meters
- Versatile with multiple installation options
- No special tools needed
- Additional cable ranges available

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-FOSCLAMP-ADSS4-.315/.394	0.315/8.00	0.394/10.00
MUL-FOSCLAMP-ADSS4-.394/.472	0.394/10.00	0.472/12.00
MUL-FOSCLAMP-ADSS4-.472/.551	0.472/12.00	0.551/14.00
MUL-FOSCLAMP-ADSS4-.472/.551	0.551/14.00	0.630/16.00
MUL-FOSCLAMP-ADSS4-.630/.709	0.630/16.00	0.709/18.00
MUL-FOSCLAMP-ADSS4-.709/.787	0.709/18.00	0.787/20.00

NEW!

ALUMINUM DEAD-END CLAMP FOR ADSS

The Multicom MUL-ADSSDE-WEDGE1 Wedge-style Deadend is designed for fast, easy, and reliable installation of ADSS aerial fiber optic cable from 8 to 20mm. The aluminum deadends are designed for higher load applications. The conical body contains a pair of sliding wedges that mechanically couple to the cable without causing damage to the sheath or fibers, providing a secure grip without fear of signal loss.

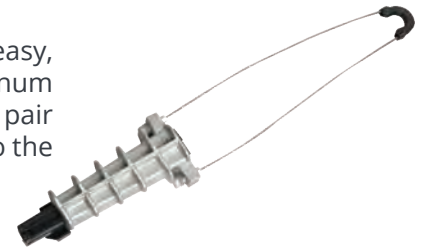

Features:

- Galvanized steel cable
- Tool free installation with sliding wedges inside the body
- Easy-open bail permits fixing to brackets and pigtails
- Quick and easy adjustable bail length
- Versatile with multiple installation options

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-ADSSDE-WEDGE1-.354/.472	0.354/9.00	0.472/12.00

NEW!

THERMO-PLASTIC DEAD-END CLAMP FOR ADSS

The Multicom MUL-ADSSDE-WEDGE2 Wedge-style Deadend is designed for fast, easy, and reliable installation of ADSS aerial fiber optic cable from 8 to 20mm. The deadends are designed with a thermo-plastic material that provides UV protection without the extra weight. The conical body contains a pair of sliding wedges that mechanically couple to the cable without causing damage to the sheath or fibers, providing a secure grip without fear of signal loss.



Features:


- Galvanized steel cable
- UV resistant neoprene sleeve insert
- For suspension spans up to 600 feet
- Versatile with multiple installation options
- No special tool needed

Part Number	ADSS Cable Range	
	Min (in/mm)	Max (in/mm)
MUL-ADSSDE-WEDGE2-.315/.394	0.315/8.00	0.394/10.00
MUL-ADSSDE-WEDGE2-.394/.472	0.394/10.00	0.472/12.00
MUL-ADSSDE-WEDGE2-.472/.551	0.472/12.00	0.551/14.00
MUL-ADSSDE-WEDGE2-.472/.551	0.551/14.00	0.630/16.00
MUL-ADSSDE-WEDGE2-.630/.709	0.630/16.00	0.709/18.00
MUL-ADSSDE-WEDGE2-.709/.787	0.709/18.00	0.787/20.00

NEW!

POLE LINE HARDWARE

Drop Clamps for FTTH Flat Drop Cable are used to support both ends of an aerial service drop span at the messenger strand and building.

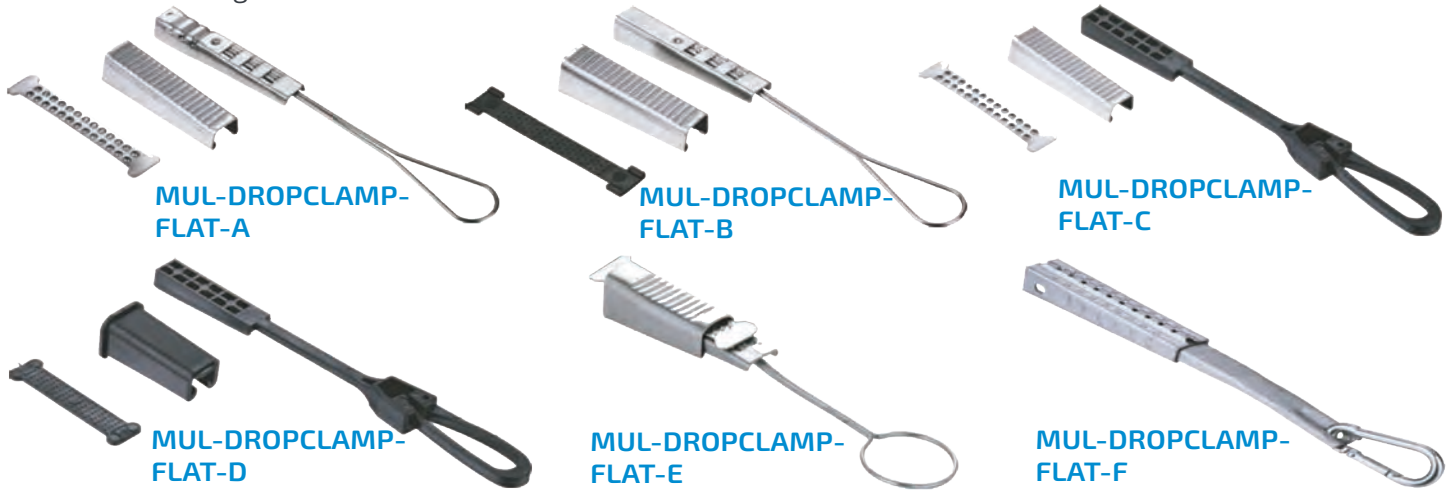

Part Number	Description	Shell	Shim	Wedge	Loop
MUL-DROPCLAMP-FLAT-A	FTTH Flat Drop Clamp	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
MUL-DROPCLAMP-FLAT-B	FTTH Flat Drop Clamp	Stainless Steel	UV Resistant Plastic	Stainless Steel	Stainless Steel
MUL-DROPCLAMP-FLAT-C	FTTH Flat Drop Clamp	Stainless Steel	Stainless Steel	UV Resistant Plastic	UV Resistant Plastic
MUL-DROPCLAMP-FLAT-D	FTTH Flat Drop Clamp	UV Resistant Plastic	UV Resistant Plastic	UV Resistant Plastic	UV Resistant Plastic
MUL-DROPCLAMP-FLAT-E	FTTH Flat Drop Clamp	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
MUL-DROPCLAMP-FLAT-F	FTTH Flat Drop Clamp	Galvanized Steel	-	Galvanized Steel	Locking Ring Stainless Steel

Drop Clamps for FTTH Round Drop Cable are used to support both ends of an aerial service drop span at the messenger strand and building.



Part Number	Description	Clamp	Loop / Bracket
MUL-DROPCLAMP-RND-A	FTTH Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-B	FTTH Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-C	FTTH Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-D	Single Layer Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-E	Double Layer Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-F	Four Layer Round Drop Wire Clamp	UV Resistant Plastic	Stainless Steel
MUL-DROPCLAMP-RND-G	Four Layer Round Drop Wire Clamp	Stainless Steel	Stainless Steel



NEW!

POLE LINE HARDWARE

Multicom offers a full line of Pole Line Hardware that is designed to withstand the test of time. Our choice of material and finish combinations ensures maximum environmental protection, regardless of location.



MUL-POLE-BRACK-A



MUL-POLE-HOOK-A-X



MUL-POLE-BRACK-B



MUL-WALL-BRACK-A



MUL-WALL-BRACK-B



MUL-POLE-BRACK-C



MUL-CABLE-BRACK-A



MUL-STRAND-HOOK-A

Part Number	Description	Clamp
MUL-POLE-BRACK-A	Universal Pole Bracket	Aluminum Alloy
MUL-POLE-HOOK-A-X	Pole Hook	Steel
MUL-POLE-BRACK-B	Pole Bracket	Steel
MUL-WALL-BRACK-A, B	Wall Bracket A, B	Steel
MUL-POLE-BRACK-C	Pole Bracket for Anchoring Clamp	Steel
MUL-CABLE-BRACK-A	Cable Management Pole Bracket	Steel
MUL-STRAND-HOOK-A	Drop Cable Hook Clamp	Aluminum Alloy / Steel

MUL-BAND-TOTE



MUL-BAND-BUCK



MUL-BAND-T201 / T316



MUL-BAND-TOOL



MUL-BAND-POLE-A



MUL-BAND-POLE-B



Part Number	Category	Description
MUL-BAND-TOTE	Bands & Buckles	Adjustable Banding in Tote
MUL-BAND-BUCK	Bands & Buckles	Stainless Steel Buckle
MUL-BAND-T201 -X/ T316-X	Bands & Buckles	Stainless Steel Band - Type T201 or Type T316 - 1/4" to 3/4"
MUL-BAND TOOL	Bands & Buckles	Banding Tool
MUL-BAND-POLE-A	Bands & Buckles	Adjustable Universal Deadend Pole Band
MUL-BAND-POLE-B	Bands & Buckles	Adjustable Pole Band

The Multicom Pole Line Hardware shown in this catalog is just the tip of the iceberg. We have two warehouses stocking Pole Line Hardware with nearly unlimited resources. If you don't see what you're looking for - ask!

MULTICOM PRODUCT CATALOG - SERIES 6



The Multicom Product Catalog includes all of the Multicom Products from Headend to End User. This catalog can be found at www.multicominc.com/catalog, and a hardcopy can be sent to you by filling out the online form. Product Categories include:

- Outside Plant
- Pole Line Hardware
- Fiber Distribution
- Fiber Optic Headend & Termination
- Video Encoders & Modulators
- Tools & Test Equipment
- IT / Data
- Indoor Products
- Satellite Dishes & LNBFs
- Additional Resources



CONTACT INFO

Multicom, Inc.
1076 Florida Central Parkway
Longwood, FL 32750 USA

Phone: 407-331-7779
800-423-2594

Fax: 407-339-0204
407-332-9086

Email: multicom@multicominc.com
www.multicominc.com

The information provided in this catalog is intended for informational purposes only and is subject to change without notice. Multicom may also make improvements and/or changes in the products described in this catalog at any time without notice. Multicom and the Multicom logo are registered trademarks of Multicom, Inc.