



Drop Cable

Product Specifications

Key Features

Cable Type	Part #	Braid %	Color/Description
RG-59	M5960-BV	60%	Black
RG-59	M5960-BVV	60%	Black/CATV UL Listed
RG-6	M660-BV	60%	Black
RG-6	M660-BVW	60%	White
RG-6	M660-BVV	60%	Black/CATV UL Listed
RG-6	M660-BVVW	60%	White/CATV UL Listed
RG-6	M660-BVM	60%	Black/Messenger
RG-6	M660-BEF	60%	Black/Flooded
RG-6	M6Q-BVV	60%/90%	QUAD Shield, CATV UL Rated
RG-6	M690-BV	90%	Black
RG-6	M690-BVW	90%	White
RG-6	M690-BVV	90%	Black/CATV UL Listed
RG-6	M690-BVVW	90%	White/CATV UL Listed
RG-6	M690-BVM	90%	Black/Messenger
RG-6	M660T-BVS	60%	SCTE Compliant, Tri-Shield
RG-11	M1160-BV	60%	Black
RG-11	M1160-BVV	60%	Black/CATV UL Listed
RG-11	M1160-BVM	60%	Black Messenger
RG-11	M1160-BEF	60%	Black/Flooded
RG-11	M1190-BV	90%	Black
RG-11	M1190-BVV	90%	Black/CATV UL Listed
RG-11	M1190-BVM	90%	Black/Messenger


Features:

- PVC Jacket
- Foam Dielectric
- Swept to 3,500 MHz
- Impedance - 75 Ohm
- 1,000 Foot Reels
- CATV UL Listed Available
- Black or White
- Copper Clad Steel Center Conductor
- Messenger, Flooded, Tri-Shield
- 60%, 90% Aluminum Braid

Frequency MHz	RG-59	RG-6	RG-11
	db/100 Ft/M	db/100 Ft/M	db/100 Ft/M
5 MHz	0.89 / 2.92	0.96 / 2.26	0.38 / 1.25
55 MHz	1.95 / 6.40	1.60 / 5.25	0.97 / 3.18
211 MHz	3.59 / 11.78	2.87 / 9.41	1.81 / 5.94
450 MHz	5.30 / 17.38	4.26 / 13.97	2.65 / 8.69
550 MHz	5.90 / 19.35	4.71 / 15.45	2.94 / 9.64
750 MHz	6.96 / 22.83	5.59 / 18.34	3.44 / 11.28
870 MHz	7.54 / 24.73	6.00 / 19.68	3.84 / 12.60
1000 MHz	8.09 / 26.54	6.54 / 21.45	4.23 / 13.87
1450 MHz	10.54 / 34.57	8.30 / 27.22	5.07 / 16.63
2250 MHz	13.70 / 44.94	10.60 / 34.77	6.50 / 21.32
3000 MHz	15.50 / 50.84	11.90 / 39.03	7.67 / 25.16
3500 MHz	16.74 / 54.91	12.85 / 42.15	8.28 / 27.16

Part# Matrix:

M660T-BVVW

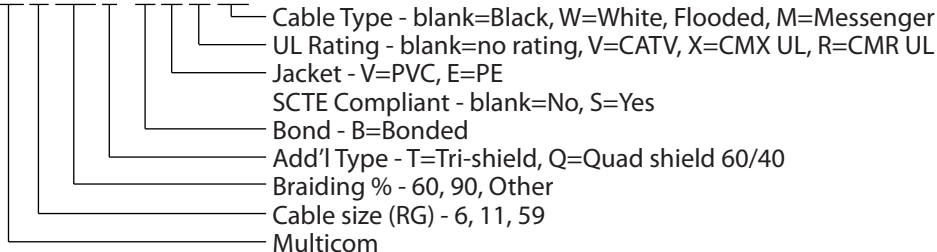

Society of Cable
Telecommunications
Engineers

www.multicominc.com

Multicom, Inc.
Ph: 407-331-7779
Fax: 407-339-0204

Email: multicom@multicominc.com