




AC Power Adapter

Key Features

- » Universal Input: 100-240VAC 50/60Hz
- » Highly efficient with low power consumption
- » Short-circuit protection and auto-recovery
- » Over-current protection and auto-recovery
- » Over-voltage protection and auto-recovery
- » Lightweight and compact
- » Wall mount

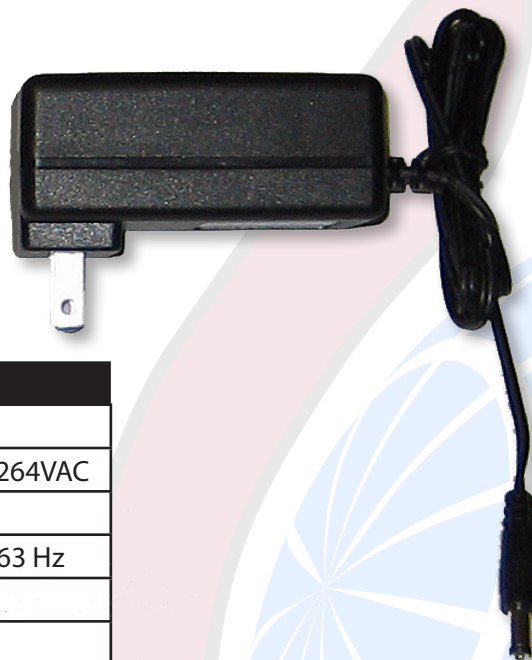

Specifications	Description	Notes
Input Characteristics		
AC input voltage	100-240VAC	Variable to 90-264VAC
AC input current	0.6A	
AC frequency	50/60 Hz	Variable to 47/63 Hz
AC Plug type	US	Wall
Output Characteristics		
Voltage	12VDC	
Rated Load	2.0A	
Output power	24W	
Power cord	22AWG	UL2468
Power cord length	1000mm	39 Inches
Output power plug	5.0 x 2.1 x 9.5mm barrel	DC power plug
Polarity	Center positive	⊖ ⊕
Environmental		
Operating temperature	0 to 40°C	32 to 104°F
Storage temperature	-10 to 70°C	14 to 158°F
Humidity	20 to 80%	
Dimensions	78L x 45W x 31H	mm
Compliance	EMI, UL, RoHS, CE, REACH	Indoor use only

Description

The Multicom wall mount MCPE12200CWUS provides 12 volts of DC power, up to 2.0 amps, to devices that require low voltage direct current.

MCPE12200CWUS

www.multicominc.com

Multicom, Inc.

Ph: 800-423-2594

Fax: 407-339-0204

Email: multicom@multicominc.com