



# AC Power Adapter

## M-CPE-12-200-F-W-US

### Key Features

- » Universal Input: 100-240VAC 50/60Hz
- » Highly efficient with low power consumption
- » Short-circuit protection and auto-recovery
- » Over-current protection and auto-recovery
- » Over-voltage protection and auto-recovery
- » Lightweight and compact
- » Wall mount




Specifications	Description	Notes
<b>Input Characteristics</b>		
AC input voltage	100-240VAC	Variable to 90-264VAC
AC input current	0.6A	
AC frequency	50/60 Hz	Variable to 47/63 Hz
AC Plug type	US	Wall
<b>Output Characteristics</b>		
Voltage	12VDC	
Rated Load	2A	
Output power	24W	
Power cord	22AWG	UL2468
Power cord length (DC)	1000mm	39 Inches
Output power plug	5.5 x 2.5 x 11mm barrel	DC power plug
Polarity	Center positive	⊖ ⊕
<b>Environmental</b>		
Operating temperature	0 to 40°C	32 to 104°F
Storage temperature	-10 to 80°C	14 to 176°F
Humidity	20 to 80%	@ 0 to 40°C
Dimensions	78L x 45.5W x 31H	mm
<b>Compliance</b>	EMI, UL, RoHS, CE, REACH	Indoor use only

### Description

The Multicom wall mount **M-CPE-12-200-F-W-US** provides 12 volts of DC power, up to 2 amps, to devices that require low voltage direct current.

### M-CPE-12-200-G-W-US Part# Matrix Sample

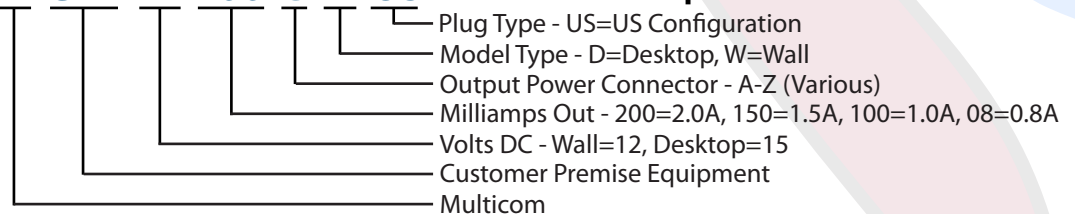

[www.multicominc.com](http://www.multicominc.com)

Multicom, Inc.  
Ph: 800-423-2594  
Fax: 407-339-0204

Email: [multicom@multicominc.com](mailto:multicom@multicominc.com)