



AC Power Adapter

M-CPE-12-300-E-D-US

Key Features

- » Universal Input: 100-240VAC 50/60Hz
- » Highly efficient with low power consumption
- » Short-circuit protection and auto-recovery
- » Over-current protection and auto-recovery
- » Over-voltage protection and auto-recovery
- » Lightweight and compact
- » Desktop


Specifications	Description	Notes
Input Characteristics		
AC input voltage	100-240VAC	Variable to 90-264VAC
AC input current	0.9A	
AC frequency	50/60 Hz	Variable to 47/63 Hz
AC Plug type	US	Desktop
Output Characteristics		
Voltage	12VDC	
Rated Load	3A	
Output power	36W	
Power cord	22AWG	UL2468
Power cord length (AC)	1000mm	39 Inches
Power cord length (DC)	1000mm	39 Inches
Output power plug	5.5 x 2.1 x 9.5mm barrel	DC power plug
Polarity	Center positive	⊖ ⊕
Environmental		
Operating temperature	0 to 40°C	32 to 104°F
Storage temperature	-10 to 80°C	14 to 176°F
Humidity	25 to 75%	@ 0 to 40°C
Dimensions	105L x 45W x 28H	mm
Compliance	EMI, UL, RoHS, CE, REACH	Indoor use only



Description

The Multicom wall mount **M-CPE-12-300-E-D-US** provides 12 volts of DC power, up to 3 amps, to devices that require low voltage direct current.

M-CPE-12-200-G-W-US Part# Matrix Sample

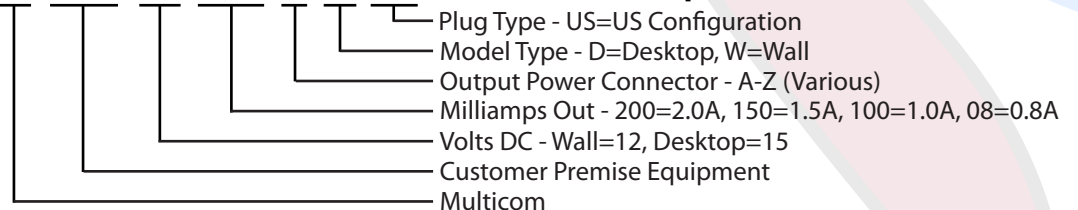

www.multicominc.com

Multicom, Inc.
Ph: 800-423-2594
Fax: 407-339-0204
Email: multicom@multicominc.com