



# AC Power Adapter

## M-CPE-15-130-D-D-US

### Key Features

- » Universal Input: 100-240VAC 50/60Hz
- » Highly efficient with low power consumption
- » Short-circuit protection and auto-recovery
- » Over-current protection and auto-recovery
- » Over-voltage protection and auto-recovery
- » Lightweight and compact
- » Desktop


Specifications	Description	Notes
<b>Input Characteristics</b>		
AC input voltage	100-240VAC	Variable to 90-264VAC
AC input current	0.5A	
AC frequency	50/60 Hz	Variable to 47/63 Hz
AC Plug type	US	Desktop
<b>Output Characteristics</b>		
Voltage	15VDC	
Rated Load	1.3A	
Output power	19.5W	
Power cord	24AWG	UL2468
Power cord length (AC)	1000mm	39 Inches
Power cord length (DC)	1000mm	39 Inches
Output power plug	5.5 x 2.0 x 8.5mm (min) barrel	DC power plug
Polarity	Center positive	⊖ ⊕
<b>Environmental</b>		
Operating temperature	0 to 40°C	32 to 104°F
Storage temperature	-10 to 80°C	14 to 176°F
Humidity	5 to 90%	@ 0 to 40°C
Dimensions	88L x 39W x 28H	mm
<b>Compliance</b>	EMI, UL, RoHS, CE, REACH	Indoor use only



### Description

The Multicom wall mount **M-CPE-15-130-D-D-US** provides 15 volts of DC power, up to 1.3 amps, to devices that require low voltage direct current.

### M-CPE-12-200-G-W-US Part# Matrix

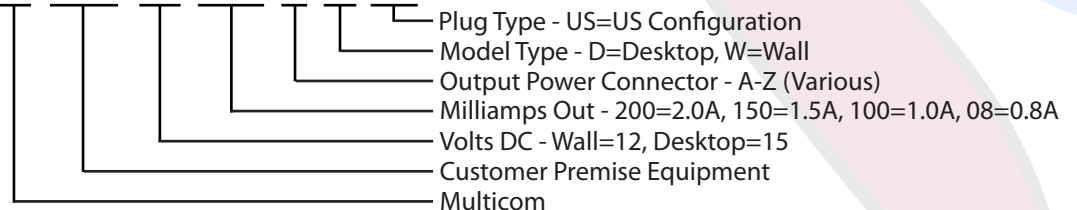

[www.multicominc.com](http://www.multicominc.com)

**Multicom, Inc.**  
**Ph: 800-423-2594**  
**Fax: 407-339-0204**  
**Email: [multicom@multicominc.com](mailto:multicom@multicominc.com)**