




## FIBER TAP DROP CABLE

### Product Description

Multilink's Indoor/Outdoor Cable Assembly with Surelight SC outdoor connector, SC/APC indoor connector, Single Fiber, Gel-Free, with toneable option. This cable is designed for rugged outdoor environments and is bend tolerant with Bend -insensitive Single Mode (OS2) fiber. Full 2.9mm riser rated (OFNR) fiber cable centered inside a traditional SST-Drop Dielectric Cable.

Transitioning from outdoor to indoor is eliminated when using this cable design. Designed as a dielectric cable to eliminate any bonding or grounding requirements. Suitable for installations requiring aerial, direct buried, and conduit.

### Ordering Guide

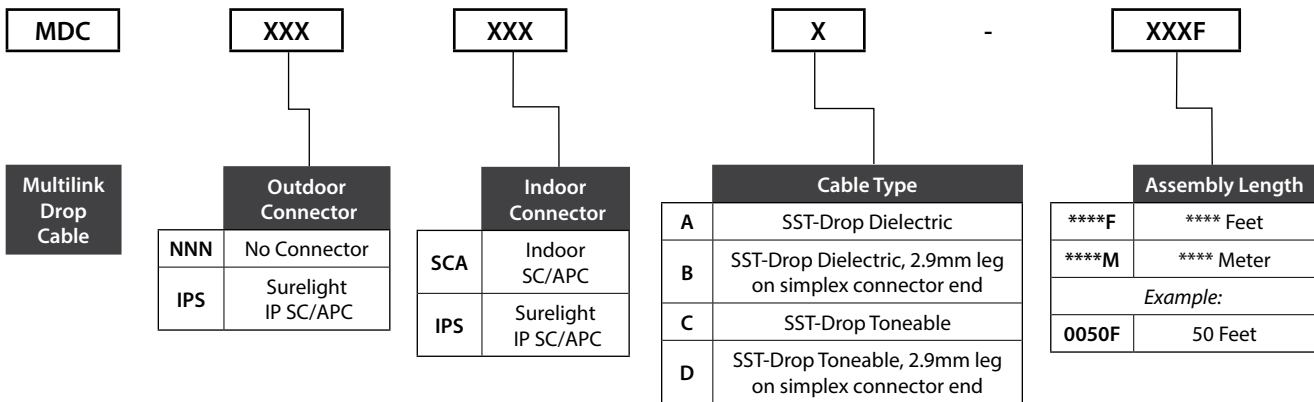



## Fiber Tap Drop Cable

### Flat Drop

### General Specifications

Application:	Aerial, Direct Buried, Duct
Cable Type:	SST-Drop™ Indoor/Outdoor Dielectric
Fiber Category:	Bend-Insensitive Single Mode (OS2)
Termination:	Both Ends
Packaging:	Individually packaged

### Temperature Range

Operation:	-40°C to 70°C (-40°F to 158°F)
------------	--------------------------------

### Mechanical Characteristics

Axial Pull, Plug to Cable, Through the Dust Cap:	100 lb
Axial Pull, Plug to Adapter Coupling Strength:	50 lb
Cold Mate / Demate:	-40°C mechanical testing