


Splice Kits

Gelseal™ Splice Kit Re-Enterable

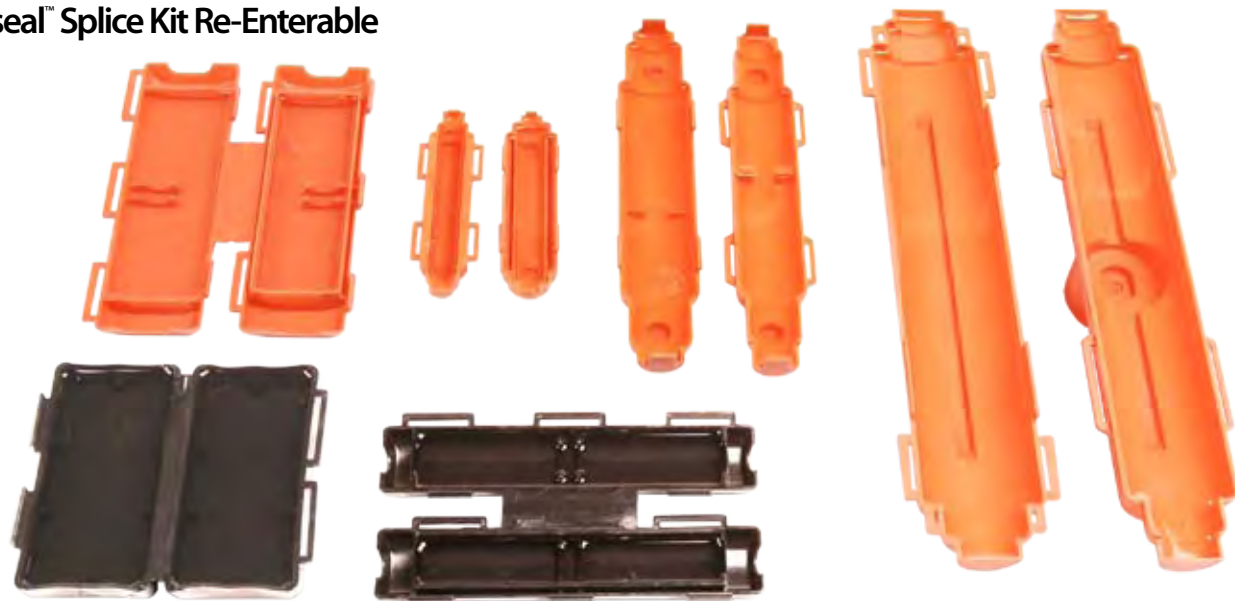


- One size fits all RG6/59 or RG7/11 drop cable and 2-6 twisted pair phones lines
- Reduces your inventory
- Stock one size for direct burial underground splices

Mechanical Specifications

Splices protected when direct buried and exposed to temperature ranges of -40°F to 140°F.

Test	Test Conditions
Environmental Cycling	-40°C to 60°C; 3 cycles/day; 100 cycles
Heat Aging	60°C; 30 days
Water Immersion	Room temperature for 30 days; 2 foot water head
Freeze-Thaw Cycling	-40°C to 60°C; 2 cycles per day; 1000 cycles
Slat Fog	Per ASTM B-368; 30 days
Soil Chemical Resistance	30 day immersion in: <ul style="list-style-type: none"> • 0.1N Na2SO4 • 0.1N H2SO4 • 0.1N NaCL • 0.1 NaOH
Fungus Resistance	Per ASTM G-21

Gelseal™ Re-Enterable

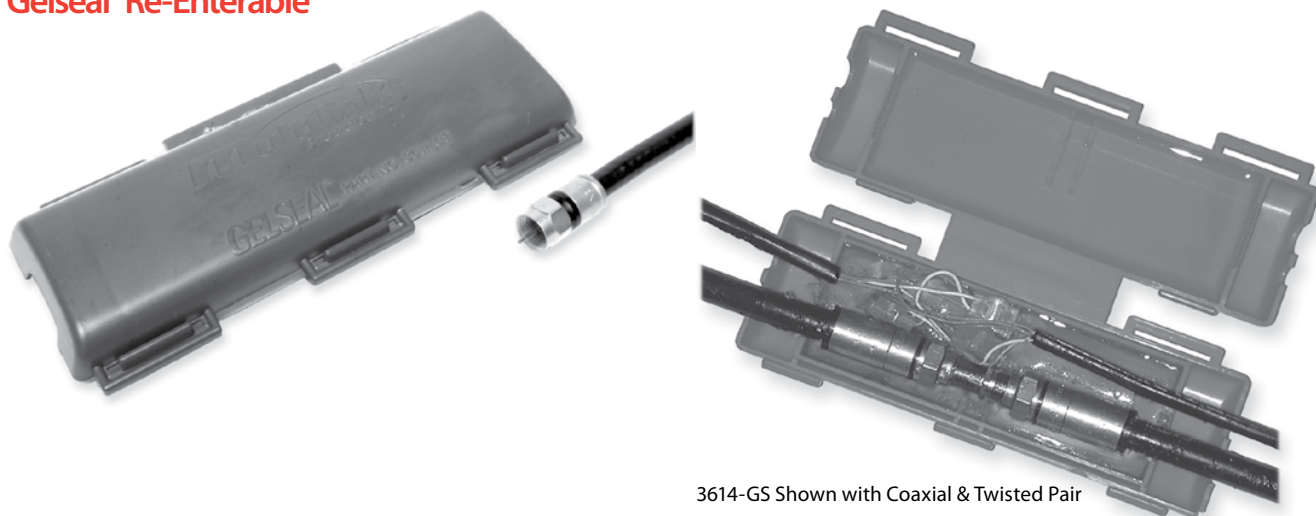

3614-GS Shown with Coaxial & Twisted Pair

Order From:



Toll Free: 800-423-2594
www.multicominc.com
multicom@multicominc.com

Gelseal™ Splice Kit Re-Enterable



3610-GS

Stock ID	34120K-OR 34120K-BLK
Description	For RG6/59 Drop Cable Twisted Pair Orange Kit
Dimensions	4" L x 1" W x 1.5" H
Weight	-
Material	Plastic with Silicone
UOM	Each



3611-GS

Stock ID	34122K-OR
Description	For RG7/11 Drop Cable Twisted Pair Orange Kit
Dimensions	7.75" L x 1.5" W x 1.75" H
Weight	-
Material	Plastic with Silicone
UOM	Each



3612-GS

Stock ID	34123K-OR
Description	Splice Repair Kit For 0.412 - 0.750 Feeder Cable Black Kit
Dimensions	12" L x 2.25" W x 3.5" D
Weight	-
Material	Plastic with Silicone
UOM	Each



3614-GS

Stock ID	34145K
Description	Multi Gelseal™ Splice Orange Kit
Dimensions	6" L x 2" W x 1" D
Weight	-
Material	Plastic with Silicone
UOM	Each



3616-GS

Stock ID	10-8342
Description	For RG59, RG6, RG7, RG11 and 312 Drop Cable Twisted Pair Black Kit
Dimensions	6" L x 2" W x 1" D
Weight	-
Material	Plastic with Silicone
UOM	Each

Order From:



Toll Free: 800-423-2594
www.multicominc.com
multicom@multicominc.com

Splice Kits

3615-GS Gelseal™ Re-Enterable



3615-GS closed

General Product Information

- Multilink's 3615-GS Gelseal™ is designed for splicing for 2-14 gauge wire in underground, direct buried and aerial applications
- Additional single cable Re-enterable Gelseal™ units for drop cable twisted pair and feeder cable are available
- Please contact Customer Service for more information

Dielectric Properties

- 500V per mil thickness of gel

3615-GS

Stock ID	34121K
Description	Plastic Power Splice Full W/ DSR2 Connector Black Kit
Dimensions	4.25" L x 2.375" W x 1.5" H
Weight	-
Material	-
UOM	Each

3615-GS

Stock ID	34118K
Description	Plastic Power Splice W/out Connector
Dimensions	4.25" L x 2.375" W x 1.5" H
Weight	-
Material	-
UOM	Each

UDSP Splice Sealant



4421-GS

Stock ID	34402K
Description	100% Underground Drop Sealant Pairs
Dimensions	4.25" L x 2.375" W x 1.5" H
Weight	-
Material	-
UOM	Each

4425-UDSP

Stock ID	34401K
Description	100% Underground Drop Sealant Pairs
Dimensions	4.25" L x 2.375" W x 1.5" H
Weight	-
Material	-
UOM	50/Bag

Order From:



Toll Free: 800-423-2594
 www.multicominc.com
 multicom@multicominc.com