PDLT-815RVA front

PDLT-815RVC front

accepts LT-GN gooseneck light

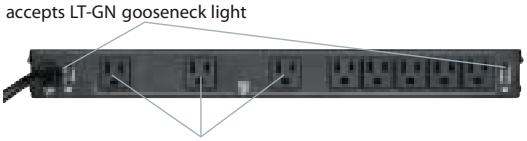

rear

outlets spaced to accommodate plug-in power supply

dimmable logo

shown with dimmable light out and lit

Accepts LT-GN gooseneck light, see pg. 108

DOES NOT PASS NOISE CONTAMINATION TO GROUND

TIA/EIA COMPLIANT UL US LISTED

A&E SPEC. # 96-01044

Designer Inspired PDLT-815RV Series Rack Light with 15 Amp Power Distribution

The Designer Inspired PDLT-815RV Series rackmount power distribution units with retractable light are equipped with 8 circuit breaker protected rear outlets. Unit features surge and spike protection and EMI filtering. Clean ground surge suppressor design will not pass noise contamination to ground. Dimmable LED bar illuminates automatically when opened for easy component viewing. Generous 13 1/2" depth provides easy access to the vertically oriented, 15 Amp rear outlets, which have been spaced to accommodate plug-in power supplies, while the extra-long 9' cord eliminates the need for an additional extension cord. Two USB ports on the rear panel accommodate the LT-GN gooseneck LED light for additional illumination of connections in the rear of the rack. Features a visually pleasing black brushed and anodized or silver brushed and anodized design and dimmable logo with hidden dimmer switches. Occupies one rackspace.

UL File #: E204950 UL Standard: 1419

Part #	Circuit	Finish	# of Outlets
PDLT-815RVA	one 15 Amp	black brushed & anodized	8
PDLT-815RVC	one 15 Amp	silver brushed & anodized	8

PD-815RA-PL front

PD-815RC-PL front

PD-815R-PL front

rear

TIA/EIA COMPLIANT UL US LISTED

A&E SPEC. # 96-939

PD-815R Series 15 Amp Unswitched Power Distribution

The PD-815R Series rackmount power distribution units are equipped with 8 rear outlets and feature a front light for on/off indication. Standard equipment includes surge and spike protection, EMI filtering and a 9' cord. A generous 9" depth provides easy access to the 15 Amp rear panel outlets which are solidly mounted on yokes to eliminate deflection. Available with a flat black powder coat or aesthetically pleasing black brushed and anodized or silver brushed and anodized face, occupies one rackspace.

UL File #: E204950 UL Standard: 1419

Part #	Circuit	Finish	# of Outlets
PD-815RA-PL	one 15 Amp	black brushed & anodized	8
PD-815RC-PL	one 15 Amp	silver brushed & anodized	8
PD-815R-PL	one 15 Amp	flat black powder coat	8

front

rear

PDS-615R

front

rear

PDS-620R

front

rear

PDS-2X315R

TIA/EIA COMPLIANT UL US LISTED

A&E SPEC. # 96-940

PDS Series Self Contained Sequencing Power Distribution

The PDS Series sequencing 15 and 20 Amp power distribution units provide 6-step sequencing to 6 rear outlets in single or dual circuit configurations. 2 circuit, 15 Amp sequencing unit provides a total of 30 amps of power in a single unit. Adjustable start time delay allows daisy-chaining of up to any (3) PDS units to act as a single 18 step unit. Sequencing intervals are facilitated via front panel controls while all sequencing activity is monitored by a series of front panel LED indicators. Additionally, a remote up/down sequencing connection block is located on the rear panel to facilitate remote control for use with customer provided single pole, double throw, center off, momentary switch. The generous 9" depth provides easy access to the yoke mounted rear outlets while the extra-long 9' cord eliminates the need for an additional extension cord. Finished in a durable black powder coat and occupies one rackspace.

UL File #: E204950 UL Standard: 1419

Part #	Circuit	# of Outlets
PDS-615R	one 15 Amp	6
PDS-620R	one 20 Amp	6
PDS-2X315R	two 15 Amp	6

Distributed by Multicom, Inc.
1076 Florida Central Parkway, Longwood, FL 32750
www.multicominc.com Toll free: 800.423.2594 Phone: 407.331.7779 Fax: 407.339.0204 multicom@multicominc.com