


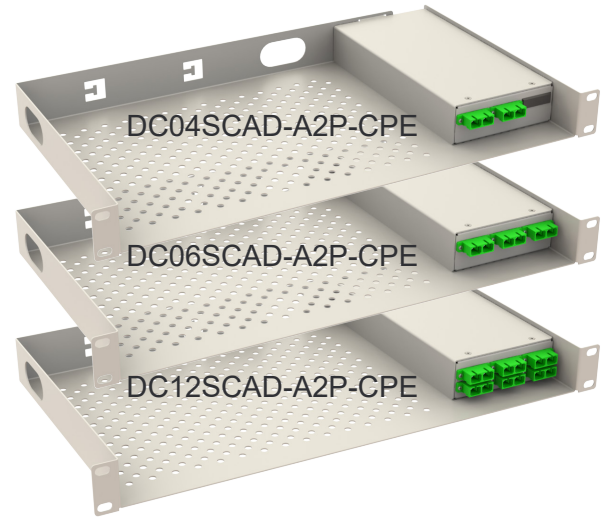


Description

Netceed Universal Active Equipment Panels allow fiber management and active equipment utilization in a 19" frame and 1U common space. The panel has two separate areas for equipment placement and optical terminations. Supports virtually any manufacturer's 1U switch/router/hub as per dimensions shown below. Installation environments are entrance facilities, telecom rooms, equipment rooms, consolidation points, and central offices. Other connector types are available up to 12 fiber capacity upon request.

Key Features

- Splicing capacity up to 24 fibers
- Cold rolled steel construction
- Durable textured powder coating finish Light Grey (RAL7035)
- Universal 19" rack compatibility
- Different type of connectors are available upon request
- Light in weight and robust structure
- Operating Temperature Range: -25° ~ 55°C (-13 ~ 131°F)
- RoHS compliant

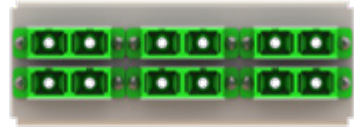

Part Number	Product Description	Illustration
DC04SCAD-A2P-CPE	Panel 1U 19" equipped with 4 pigtails G657.A2 EZ, 2 duplex SC/APC adapters	
DC06SCAD-A2P-CPE	Panel 1U 19" equipped with 4 pigtails G657.A2 EZ, 2 duplex SC/APC adapters	
DC12SCAD-A2P-CPE	Panel 1U 19" equipped with 4 pigtails G657.A2 EZ, 2 duplex SC/APC adapters	

Dimensions

