




Singlemode Fiber Optic Patch Cords


Features:

- Custom lengths
- Individually packed, all connectors include dust caps
- 3mm jacket for more flexibility and durability in tight spaces
- Meets all standard panel interfaces
- All cables serialized and test results are recorded
- High bandwidth, high tensile strength, small bend radius

Parameter	Specification
Connector	SC/FC/LC/E2000 to SC/FC/LC/E2000
Fiber Mode	9/125µm
Polish	UPC to UPC, APC to UPC
Fiber Type	Simplex
Insertion Loss	≤0.3dB
Return Loss	≥50dB UPC, ≥60dB APC
Wavelength	1310/1550nm
Jacket Material	LSZH - IEC60332-3, IEC60754-2, IEC61034-2 Compliant
Jacket Outside Diameter	3.0mm
Jacket Color	Yellow, per EIA/TIA 598
Operating Temperature	-40 ~ 75°C
Storage Temperature	-45 ~ 85°C
Fiber Grade	G.652D, G.657A2
Compliance	Telcordia GR-20-CORE, GR-326 and TIA/EIA 568C, RoHS

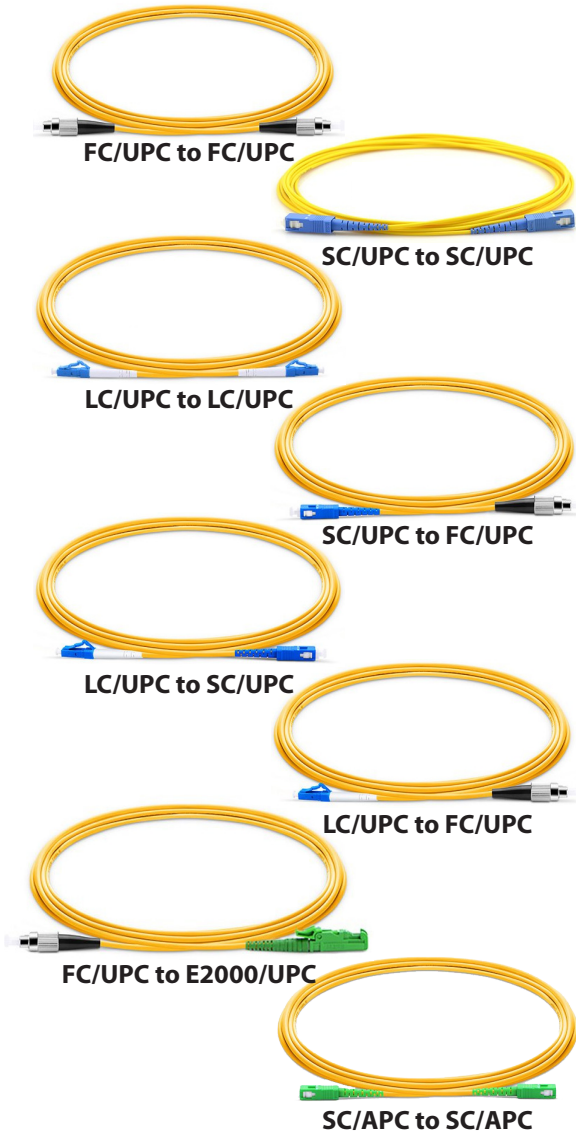

FOJ3-xM-SM-xx/yyy-S-xx/yyy-AL

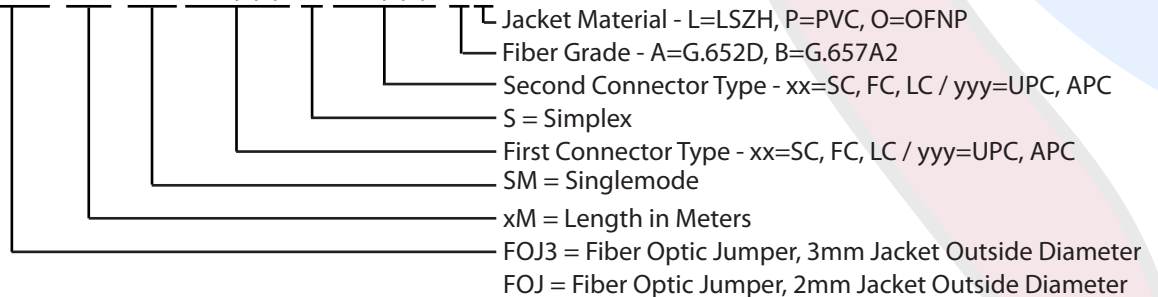

www.multicominc.com

Multicom, Inc.
1076 Florida Central Parkway
Longwood, FL 32750
Ph: 800-423-2594 / 407-331-7779
Fax: 407-339-0204
Email: multicom@multicominc.com