

PS8 Power Supply

SPECIFICATIONS

GENERAL

Power Requirements: ----- 100 VAC to 240 VAC
(and -10%/+10% of end limits)
Frequency: ----- 50/60 Hz
AC Input Power: ----- 80 WATTS
Operating Temperature Range: ----- 0 to +50 °C
Internally Mounted (50 mm) Axial Fan
(12 VDC @ 140 mA): ----- 12 CFM (ft³/min.)
Output Voltages: ----- +5 VDC @ 4.75 Amps maximum;
+12 VDC @ 3 Amps maximum

MECHANICAL

Dimensions: (WxHxD): ----- 4.2 in. x 3.5 in. x 9.4 in.
(10.7 cm x 8.9 cm x 23.9 cm)
Weight: ----- 2.6 lbs. (1.2 Kg)

CONNECTORS

AC Input: ----- IEC
DC Output: ----- Mini-Fit, JR. x 8

Fuse (Internal, AC input): 2A, 250 V
SLO-BLO
5 x 20 mm

(Power supply assembly employs short circuit and over-voltage protection).

ACCESSORY SUPPLIED


AC Power Cord: ----- 6 Ft., IEC, USA

PS8 Rear Panel Connections


Both the AC input receptacle and DC output connector are located on the rear panel of the power supply module.

1. AC Input - The power supply accepts standard 100 to 240 VAC, 50/60 Hz inputs (and -10%/+10% of that voltage range).

2. DC Output - The polarized Mini-Fit, JR. connector provides 8 sets of +12 VDC, +5 VDC, and Ground connection cables for the compatible digital rack units.

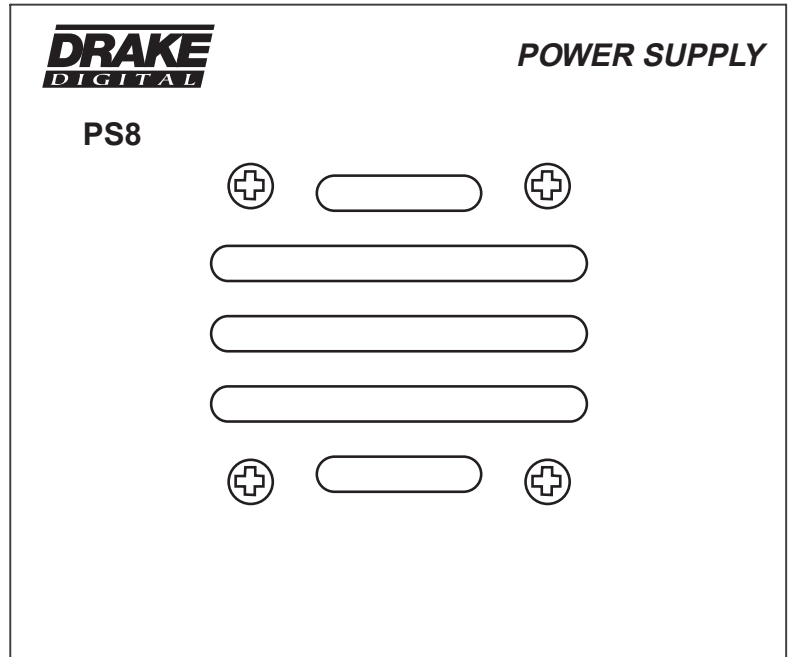

Front Panel

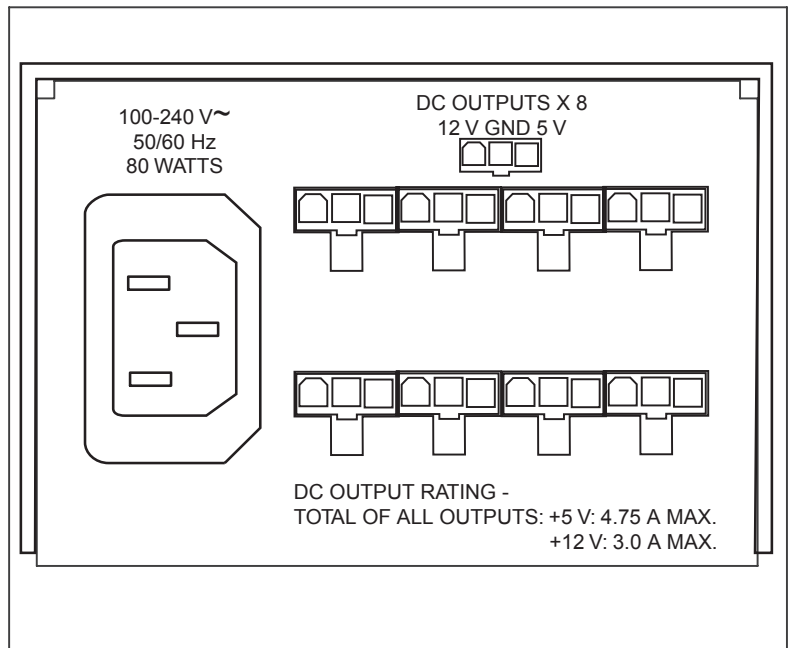

Rear Panel

Order From: 

800-423-2594
www.multicominc.com
multicom@multicominc.com