


SP2G-2		Specifications		
	Item	Freq. range (MHz)	specs (dB Max)	
1	Insertion Loss	5 - 806	4.5	
		950 - 1750	4.9	
		1750 - 2150	5	
2	Return Loss	5 - 806	12	
		Input and Output	950 - 1750	12
		1750 - 2150	12	
3	port-port Isolation	5 - 806	18	
		950 - 1750	20	
		1750 - 2150	18	
4	Band Flatness	5 - 806	2	
		950 - 1750	2	
		1750 - 2150	2	
5	Channel transponder flatness	5 - 806	0.23	
		950 - 1750	0.23	
		1750 - 2150	0.23	

Grounding screw:

Mounting screw:

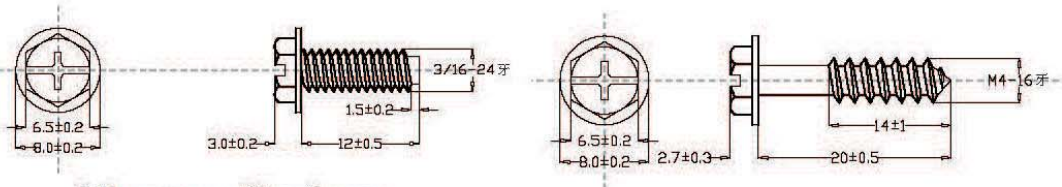

Other specifications:

1. Threads - 3/8-32 UNEF - (9.3MM +/- 0.1)
2. Rotational torque - 75 lb-in Min.