




# Strandlink®



Strandlinks® are used for splicing applications with overhead or down guy wire.

### Features

- Rated to hold a minimum of 90% of RBS of the strand used
- “Universal Grades” are recommended for use with Alumoweld, EHS, aluminized and galvanized steel
- “All Grades” are recommended for use on common grade, Siemens-Martin, high strength utility grade, galvanized and aluminized steel strand

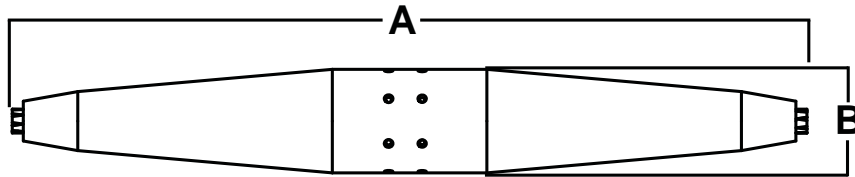


### Universal Grade

Catalog Number	Primary Strand Application	Range (In)	A	B
5039	3/16"	.145-.215	7.50	1.03
5040	1/4"	.215-.270	7.62	1.13
5041	5/16"	.270-.315	9.28	1.26
5042	3/8"	.325-.392	10.62	1.45
5043	7/16"	.392-.455	10.59	1.59
5044	1/2"	.455-.520	10.75	1.70

### All Grade

Catalog Number	Primary Strand Application	Range (In)	A	B
4999	3/16"	.185-.193	5.10	0.70
5000	1/4"	.240-.253	6.40	0.90
5001	5/16"	.310-.335	7.25	1.04
5002	3/8"	.360-.405	8.00	1.25



### Reducers

Catalog Number	Primary Strand Application	Range Large End (In)	Range Small End (In)
5086	1/4" x 3/16"	.215-.270	.145-.215
5087	5/16" x 1/4"	.270-.315	.215-.270
5022	3/8" x 5/16"	.360-.450	.310-.335
5023	7/16" x 3/8"	.410-.455	.360-.405