



High Speed HDMI Cable v2.0

Multicom's v2.0 High Speed HDMI cable with Ethernet provides a reliable, high quality connection between audio and video components. This HDMI cable consistently delivers excellent picture and sound quality for today's discriminating A/V enthusiasts.




Features:

- Supports full-resolution 4K, Adobe RGB Color, Deep Color, 3D, sYCC601 Color, and Adobe YCC601 to accurately display natural, vivid colors
- Supports Dolby Digital, DTS, Dolby True HD, DTS-HD MasterAudio, Audio Return Channel and Lip Sync to deliver the highest quality and duplication of sound
- Compatible with the lossless compressed digital audio formats

Parameter	Specification
Standard Reference	v2.0 High Speed HDMI with 100Mbps Ethernet Channel
Video Resolution	(4K x 2K Pixels) Full 1080p, 1440p, 1600p, 2160p
Compatibility	3D, 4Kx2K, ARC return audio channel
Audio Format	Sound Environment 7.1 and lossless audio formats (DTS-HD & Dolby Digital TrueHD)
Bandwidth	13.8 Gbps (Data transfer)
Ethernet Channel	Yes
Conductors	HighQuality 99.99% Oxygen Free
Conductor Resistance	5 Ohm Max.
Contact Resistance	2 Ohm Max.
Connector	19-Pin HMDI Male A to HDMI Male A Black PVC Outer Shell with metal exterior and zinc alloy interior, gold plated
Insulation Resistance	10M Ohm Min.
Wire Guage	30 AWG
Table Speed	120Hz
Depth of Color	12 Bit
Impedence	100 Ohm ±10
Rated Voltage	30V
Hi-Pot	DC 300V 0.01 Sec.
Cable Wrapping	Outer shell: 45P 6mm Black PVC Inner shell: Aluminum for protection against External Electrical Interference (EMI) and Radio Frequency Interference (RFI) Ferrite Filter ends for triple density protection against interference
Cable Length	1.5M (4.92 Feet) ±40mm, Available in custom lengths
Operating Temperature	-25 to 80°C (-13 to 176°F)
Compliance	RoHS, UL, FCC, ISO9001:2008, ISO14001:2004, Simplay 2.0, ATC:1.4

MUL-HDMI 2.0-1.5M-MA-MA-HS-30

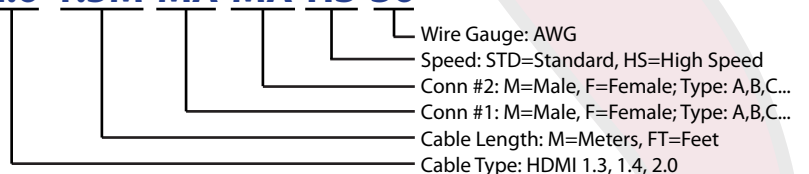

www.multicominc.com

Ph: 407-331-7779

800-423-2594

multicom@multicominc.com