


SPECIFICATIONS/DATA

48" x 48" PG Style (Stackable) Assembly

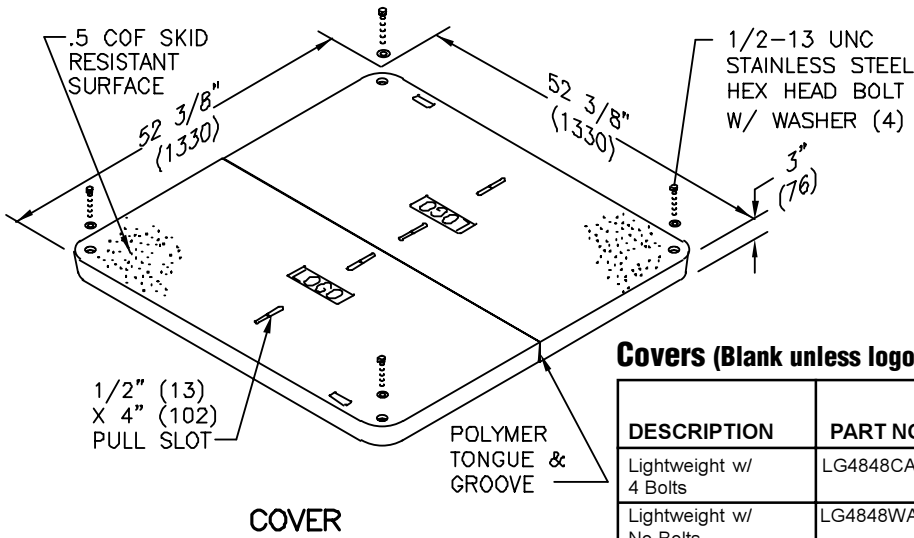


Covers (Blank unless logo is specified)

DESCRIPTION	PART NO.	WEIGHT #	DESIGN/TEST LOAD #	ANSI TIER
Lightweight w/ 4 Bolts	LG4848CA00	240 (108.9 kg)	5,000 / 7,500	5
Lightweight w/ No Bolts	LG4848WA00	240 (108.9 kg)	5,000 / 7,500	5
Heavy Duty w/W6 x 12 Wide Flange Beam w/4 Bolts*	PG4848HA00	364 (165.1 kg)	15,000 / 22,500	15
Extra Heavy Duty w/ 6 x 4 Tubing w/ 4 Bolts*	PG4848HH00	626 (284.0 kg)	22,500 / 33,750	15**
Round 39" Opening	PG4848C500	442 (200.5 kg)	5,000 / 7,500	5

- Covers with meter lids available upon request.
- Torsion assist covers are available. See page 41.
- * Total weight for 48" x 48" HA & HH cover beam is 51 lbs (23.1 kg).
- ** Loadings for HH covers comply with all test provisions of ANSI/SCTE 77 except that the vertical design load is 22,500 lbs. with a test load of 33,750 lbs. over a 10" x 20" plate.

W6 X 12 WIDE FLANGE BEAM
(FOR PG4848HA00 COVERS)
6 X 4 TUBING (FOR
PG4848HH00 COVERS)

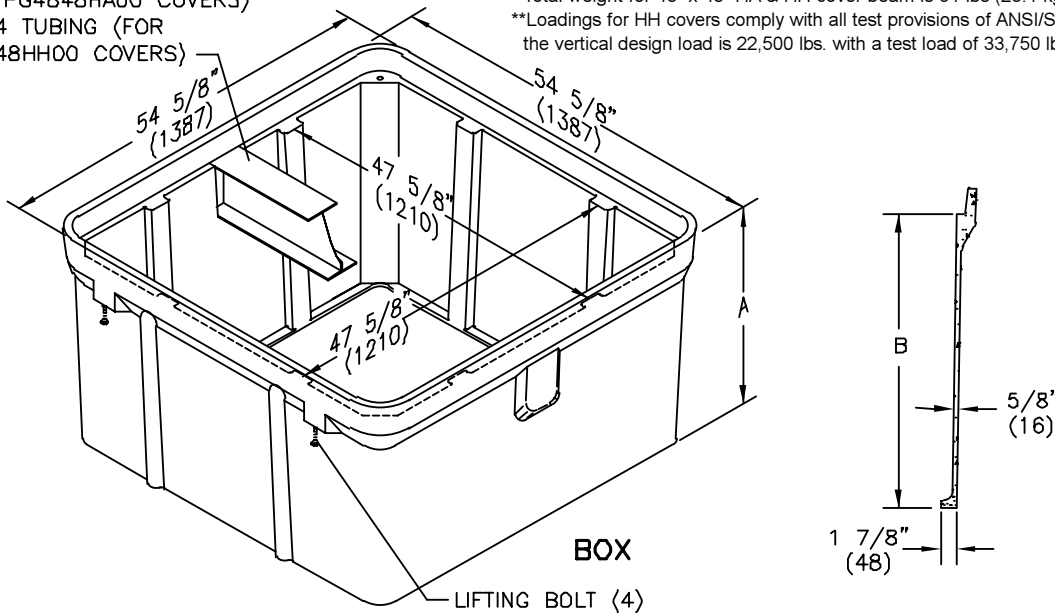

Boxes (Stackable with self-aligning, replaceable EZ-Nut)

DESCRIPTION	PART NO.	WEIGHT #	DIMENSION A	DIMENSION B	DESIGN/TEST LOAD #	ANSI TIER
Open bottom	PG4848BA36	588 (267.7 kg)	36" (914 mm)	33" (838 mm)	22,500 / 33,750	15*
	PG4848BA48	763 (346.1 kg)	48" (1219 mm)	45" (1143 mm)	22,500 / 33,750	15*
Solid Bottom	PG4848DA36	685 (310.7 kg)	36 1/2" (927 mm)	33" (838 mm)	22,500 / 33,750	15*
	PG4848DA48	860 (390.1 kg)	48 1/2" (1232 mm)	45" (1143 mm)	22,500 / 33,750	15*

* Loadings comply with ANSI/SCTE 77. These boxes meet and exceed ANSI Tier 15 test provisions.
Dimensions & weights in parentheses are metric equivalent.

ENCLOSURE DRAWINGS