

PRODUCT RELEASE

Eagle Brick Wall Deletion EBWD

The EBWD series of Channel Deletion filters attenuate the entire channel from video to audio while preserving the adjacent channel carriers. This allows the reinsertion of a new channel or data signal without interference from the original signal.

Application

Removal of a selected channel or frequency to allow the reinsertion of a locally originated signal.
Commercial Accounts, Schools, Hospitals, Hotels, Homeowners

Features


Exceptional Low Insertion Loss
Extended High Frequency
Temperature / Frequency Stable
Passes Adjacent Channels
Rack Mount or Wall Mount Options
Connectors "F" Type
Power Passing Available

Specifications

CHANNELS: 2 through 125
PASSBAND: 5 MHz - 750 MHz (ch 2,3)
5 MHz - 1 GHz (ch 4-125)
* 1 GHz Ext available for channels 2 and 3
CHANNEL REJECTION: -55 dB typ.
ADJACENT CARRIER LOSS: -3.0 dB typ.
INSERTION LOSS: -1 dB typ.
TEMPERATURE RANGE: 32° F to +140° F
IMPEDANCE: 75 Ohms

Ordering Information

EBWD-XX or EBWD-XX-R or -W,
XX=CHANNEL, R=RACK MOUNT, W=WALL MOUNT

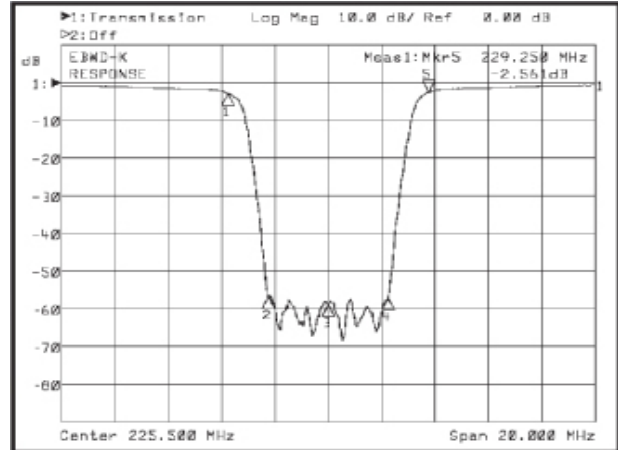

Specifications subject to change without notice.

Multiple Channel
Deletions Available



• EBWD Wall Mount



• EBWD Rack Mount



Purchase from Multicom  www.multicominc.com | 800-423-2594